

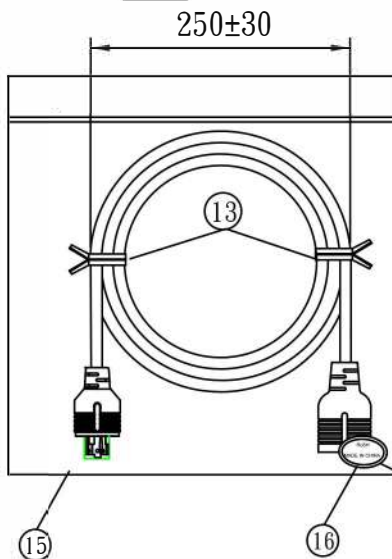

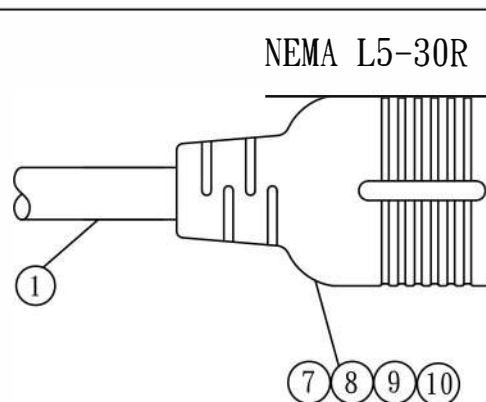


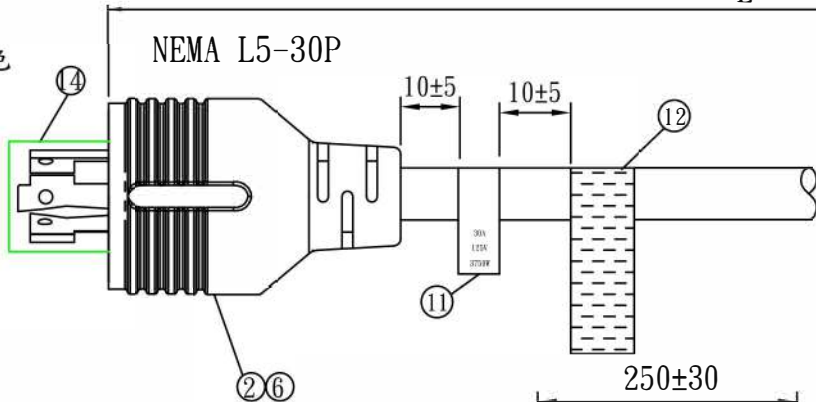

"L"



| L1 | L2 | L3 | L4 | L5 |
|-------------|--------------|---------------|---------------|---------------|
| (3') 915±35 | (6') 1830±50 | (10') 3050±50 | (15') 4575±80 | (25') 7620±80 |

| 序號 | 品名規格 | 用量 | 備注 |
|----|----------------------|--------|-----------|
| 1 | SJT 10/3C 105°C 黑色 | 1PC | |
| 2 | YP-55 35P黑色膠料 | 32g/PC | |
| 3 | "N"銅片:95659 | 1PC | |
| 4 | "E"接地線:95658 | 1PC | |
| 5 | "L"銅片:95657 | 1PC | |
| 6 | YP-55內模 | 1PC | |
| 7 | YC-55 PVC 膠料:35P 黑色 | 30g/PC | |
| 8 | L,N極端子:95757BS-0 | 2PCS | |
| 9 | 地線端子:95758BS-0 | 1PCS | |
| 10 | YC-55 內模 白色 | 1PC | |
| 11 | UL標籤: 30A 125V | 1PC | 鐳射標籤(UL) |
| 12 | 警告標籤: 230*36mm | 1PC | Label-205 |
| 13 | 迷你帶:L=200MM 黑色 | 2PCS | |
| 14 | YP-55護套 白色 | 1PC | |
| 15 | 環保夾鏈袋:430X360X0.06mm | 1PC | |
| 16 | ROHS標籤 客供 | 1PC | |

| | | | | | | |
|--|-----------------------------------|----------------|-------------|----------|--|--|
| 核准: | 審核: | 業務: | | | | |
| 一般寸法公差: >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle:±1° | 制圖 周淑萍 | 日期 19.07.02 | | | | |
| | 型號 PWCD-L530PL530R-30A-XXF-BLK | | 客戶料號 | | | |
| | 圖號 | 版本 B | 材質 P.V.C | 單位 mm | | |
| | | | 單重(g) | | | |