


COIL: @ 25°C	
RESISTANCE	2500 OHMS ± 10%
NOMINAL VOLTAGE	48.0 VDC
MUST OPERATE	25.0 VDC
MUST RELEASE	2.5 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:	OPERATE 6 MS MAX.
	RELEASE 3 MS MAX.
	CONTACT BOUNCE 3 MS MAX.

CUSTOMER DATA SHEET

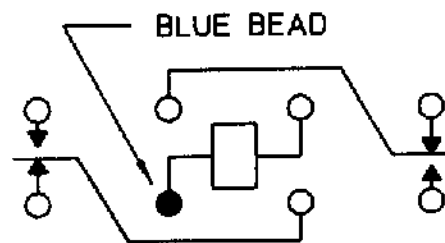

CONTACT RATING: LOW LEVEL TO
2 AMPS 30 VDC RESISTIVE
100,000 OPERATIONS

DR. R.B. 2/28/95 CK2/23/850/11

COMMUNICATIONS INSTRUMENTS, INC.

CUST. HI-G
CUST. NO. 2B-2A-148

TYPE "FW" RELAY

FW1201S31