



SECTION C-C



CIRCUIT I

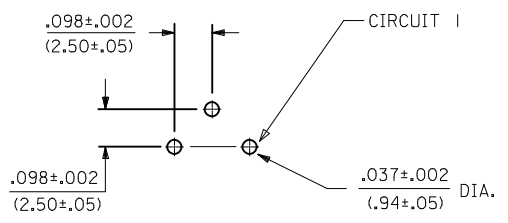

PCB HOLE LAYOUT: COMPONENT SIDE
RECOMMENDED PCB THICKNESS: .062 (1.57)

NOTES:

1. MATERIAL: HEADER: GLASS-FILLED POLYESTER, UL94V-0, COLOR: WHITE
PIN : BRASS
2. FINISH:
.000100/(0.00254) MIN. TIN OVER
.000050/(0.00127) MIN. NICKEL UNDERPLATE.
3. PRODUCT SPECIFICATION: PS-42219-0001.
4. PACKAGING SPECIFICATION: PK-42249-0001
5. ALL PINS ARE KINKED.
6. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

ADD PK SPEC EC NO: UCP2013-2919 DRAWN: KIPPER 2013/01/17 CHKD: BANDERSON 2013/01/17 APPR: FSMITH 2013/01/29	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± .01</td> <td>± .0004</td> </tr> <tr> <td>3 PLACES</td> <td>± .01</td> <td>± .0004</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.25</td> <td>± .010</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.36</td> <td>± .014</td> </tr> <tr> <td>0 PLACE</td> <td>±</td> <td>±</td> </tr> </table>		mm	INCH	4 PLACES	± .01	± .0004	3 PLACES	± .01	± .0004	2 PLACES	± 0.25	± .010	1 PLACE	± 0.36	± .014	0 PLACE	±	±	DIMENSION STYLE IN/MM DRAWN BY DATE ELHAG 2005/03/05 CHECKED BY DATE ELHAG 2005/03/05 APPROVED BY DATE FSMITH 2005/03/07	SCALE 4:1 DESIGN UNITS METRIC THIRD ANGLE PROJECTION	TITLE 2.5 MM HEADER ASSEMBLY (STAGGERED PINS) 3 CKT molex
		mm	INCH																				
	4 PLACES	± .01	± .0004																				
	3 PLACES	± .01	± .0004																				
2 PLACES	± 0.25	± .010																					
1 PLACE	± 0.36	± .014																					
0 PLACE	±	±																					
B2	ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. 42249-1000	DOCUMENT NO. SD-42249-001	SHEET NO. 1 OF 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																		