



May. 2021 Ver.5.0a  
TDK Corporation

## Multilayer Diplexer

For LTE

DPX Series 2.0x1.25mm [EIA 0805] TYPE


P/N: **DPX205925DT-4226A2**

May. 2021 Ver.5.0a  
TDK Corporation


## DPX205925DT-4226A2

### ■ SHAPES AND DIMENSIONS

[Top View]

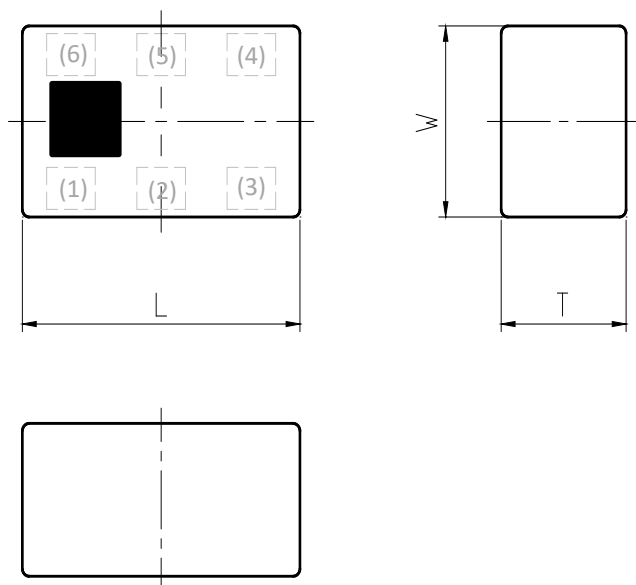

[Bottom View]

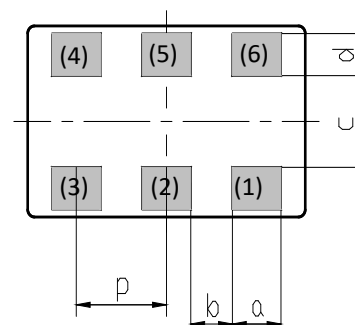

Dimensions (mm)

| L       | W       | T    | a       | b       | c       | d       | p       |
|---------|---------|------|---------|---------|---------|---------|---------|
| 2.00    | 1.25    | 0.65 | 0.35    | 0.30    | 0.60    | 0.275   | 0.65    |
| +/-0.10 | +/-0.10 | Max  | +/-0.10 | +/-0.15 | +/-0.10 | +/-0.10 | +/-0.10 |

Terminal functions

|     |             |
|-----|-------------|
| (1) | GND         |
| (2) | Common Port |
| (3) | GND         |

|     |                |
|-----|----------------|
| (4) | High-Band Port |
| (5) | GND            |
| (6) | Low-Band Port  |

### ■ TERMINATION FINISH

| Material |
|----------|
| Au plate |

## DPX205925DT-4226A2

### ■ ELECTRICAL CHARACTERISTICS

( Measurement )

#### Low-Band

| Parameter                                | Frequency (MHz) | TDK Spec.    |      |      |
|--|-----------------|--------------|------|------|
|  |                 | Min.         | Typ. | Max. |
| Insertion Loss (dB)                      | 3300 to 3800    | -            | 0.72 | 0.95 |
|  | to              | -            | -    | -    |
| Insertion Loss (dB)<br>( -40 to +85 °C ) | 3300 to 3800    | -            | -    | 1.15 |
|  | to              | -            | -    | -    |
| Return Loss (dB)<br>( Low-Band Port )    | 3300 to 3800    | 10           | 24.8 | -    |
|  | to              | -            | -    | -    |
| Attenuation (dB)                         | 4400 to 4900    | 15           | 18.0 | -    |
|  | 4900 to 5000    | 15           | 17.9 | -    |
|  | 5150 to 5925    | 15           | 17.9 | -    |
| Characteristic Impedance (ohm)           |                 | 50 (Nominal) |      |      |

Ta = +25+/-5°C

#### High-Band

| Parameter                                | Frequency (MHz) | TDK Spec.    |      |      |
|--|-----------------|--------------|------|------|
|  |                 | Min.         | Typ. | Max. |
| Insertion Loss (dB)                      | 4400 to 4900    | -            | 0.70 | 0.95 |
|  | 4900 to 5000    | -            | 0.29 | 0.55 |
|  | 5150 to 5925    | -            | 0.30 | 0.55 |
| Insertion Loss (dB)<br>( -40 to +85 °C ) | 4400 to 4900    | -            | -    | 1.00 |
|  | 4900 to 5150    | -            | -    | 0.65 |
|  | 5150 to 5925    | -            | -    | 0.65 |
| Return Loss (dB)<br>( High-Band Port )   | 4400 to 4900    | 10           | 23.6 | -    |
|  | 4900 to 5000    | 10           | 23.2 | -    |
|  | 5150 to 5925    | 10           | 14.8 | -    |
| Attenuation (dB)                         | 3300 to 3400    | 14           | 16.1 | -    |
|  | 3400 to 3800    | 15           | 17.7 | -    |
| Characteristic Impedance (ohm)           |                 | 50 (Nominal) |      |      |

Ta = +25+/-5°C

## DPX205925DT-4226A2

### ELECTRICAL CHARACTERISTICS

( Measurement )

#### Common

| Parameter                           | Frequency (MHz) | TDK Spec.    |      |      |
|-------------------------------------|-----------------|--------------|------|------|
|                                     |                 | Min.         | Typ. | Max. |
| Isolation (dB)                      | 3300 to 3400    | 14           | 16.9 | -    |
|                                     | 3400 to 3800    | 15           | 18.4 | -    |
|                                     | 4400 to 4900    | 15           | 18.7 | -    |
|                                     | 4900 to 5000    | 15           | 18.6 | -    |
|                                     | 5150 to 5925    | 15           | 18.7 | -    |
| Return Loss (dB)<br>( Common Port ) | 3300 to 3800    | 10           | 25.8 | -    |
|                                     | 4400 to 4900    | 10           | 17.6 | -    |
|                                     | 4900 to 5000    | 10           | 23.4 | -    |
|                                     | 5150 to 5925    | 10           | 16.7 | -    |
| Characteristic Impedance (ohm)      |                 | 50 (Nominal) |      |      |

Ta = +25+/-5°C

### MAXIMUM RATINGS


| Parameter                                 |                | TDK Spec      |      | Conditions                    |
|---|----------------|---------------|------|-------------------------------|
|   |                | Min.          | Max. |                               |
| Operating temperature (°C)                |                | -40 to +85 °C |      |                               |
| Storage temperature (°C)                  |                | -40 to +85 °C |      |                               |
| Power Handling (W)                        | Common Port    | -             | 2    | CW                            |
|   | Low-Band Port  | -             | 2    | CW                            |
|   | High-Band Port | -             | 2    | CW                            |
| Human Body Model : HBM @Each Port (V)     |                | -1000         | 1000 | 100pF / 1500ohm               |
| Machine Model : MM @Each Port (V)         |                | -150          | 150  | 200pF / 0ohm                  |
| Charged Device Model : CDM @Each Port (V) |                | -500          | 500  | Relative humidity : 60%RH max |

\*1 : Refer to 3GPP TS 38.101-1 V15.2.0


May. 2021 Ver.5.0a  
TDK Corporation

## DPX205925DT-4226A2


### FREQUENCY CHARACTERISTICS

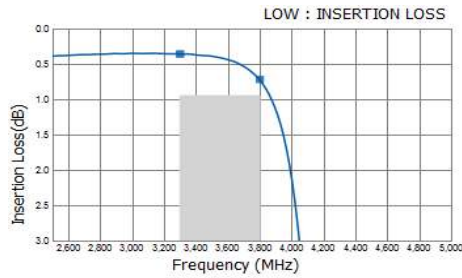


|      |                                      |
|------|--------------------------------------|
| P/N  | DPX205925DT-4226A2_ver1.0N_Dec172018 |
| Freq |                                      |
| 3300 | 0.36                                 |
| 3800 | 0.72                                 |

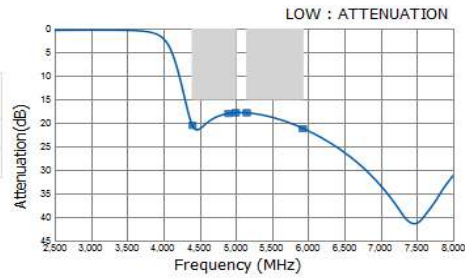


|      |                                      |
|------|--------------------------------------|
| P/N  | DPX205925DT-4226A2_ver1.0N_Dec172018 |
| Freq |                                      |
| 4400 | 20.53                                |
| 4900 | 18.01                                |
| 5000 | 17.87                                |
| 5150 | 17.88                                |
| 5925 | 21.20                                |

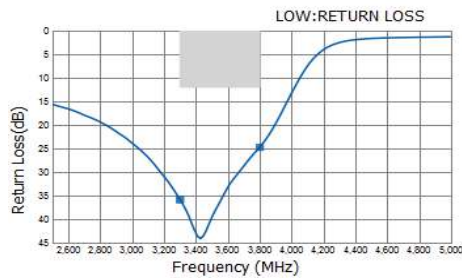


|      |                                      |
|------|--------------------------------------|
| P/N  | DPX205925DT-4226A2_ver1.0N_Dec172018 |
| Freq |                                      |
| 3300 | 35.89                                |
| 3800 | 24.75                                |




|      |                                      |
|------|--------------------------------------|
| P/N  | DPX205925DT-4226A2_ver1.0N_Dec172018 |
| Freq |                                      |
| 3300 | 49.13 / -1.33                        |
| 3800 | 51.68 / 5.65                         |

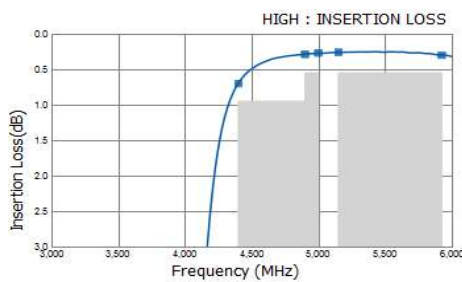


|      |                                      |
|------|--------------------------------------|
| P/N  | DPX205925DT-4226A2_ver1.0N_Dec172018 |
| Freq |                                      |
| 4400 | 0.70                                 |
| 4900 | 0.29                                 |
| 5000 | 0.27                                 |
| 5150 | 0.26                                 |
| 5925 | 0.30                                 |

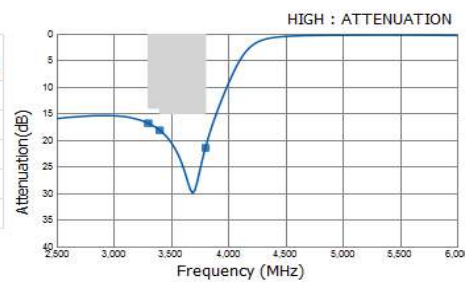

|      |                                      |
|------|--------------------------------------|
| P/N  | DPX205925DT-4226A2_ver1.0N_Dec172018 |
| Freq |                                      |
| 3300 | 16.81                                |
| 3400 | 18.14                                |
| 3800 | 21.45                                |

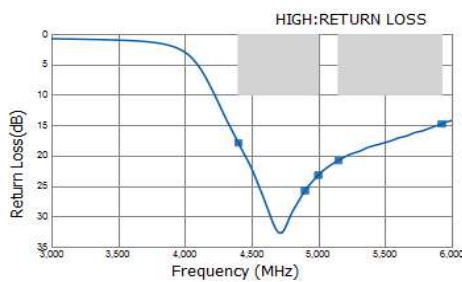

|      |                                      |
|------|--------------------------------------|
| P/N  | DPX205925DT-4226A2_ver1.0N_Dec172018 |
| Freq |                                      |
| 4400 | 17.89                                |
| 4900 | 25.78                                |
| 5000 | 23.22                                |
| 5150 | 20.82                                |
| 5925 | 14.77                                |




|      |                                      |
|------|--------------------------------------|
| P/N  | DPX205925DT-4226A2_ver1.0N_Dec172018 |
| Freq |                                      |
| 4400 | 55.85 / 12.27                        |
| 4900 | 47.98 / -4.62                        |
| 5000 | 46.23 / -5.48                        |
| 5150 | 44.19 / -6.34                        |
| 5925 | 39.87 / -13.13                       |


May. 2021 Ver.5.0a  
TDK Corporation

## DPX205925DT-4226A2


### ■ FREQUENCY CHARACTERISTICS

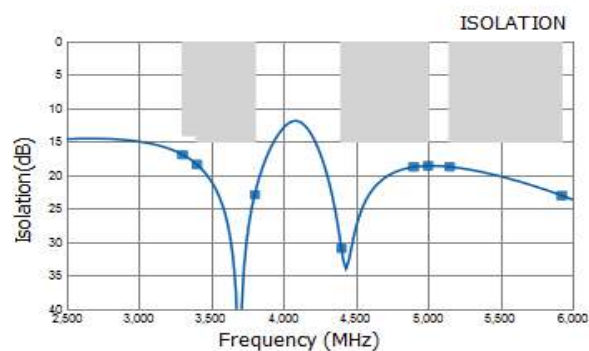

| P/N  | DPX205925DT-4226A2_ver1.0N_Dec172018 |
|------|--------------------------------------|
| Freq |                                      |
| 3300 | 16.89                                |
| 3400 | 18.37                                |
| 3800 | 22.85                                |
| 4400 | 30.90                                |
| 4900 | 18.73                                |
| 5000 | 18.57                                |
| 5150 | 18.71                                |
| 5925 | 23.03                                |




| P/N  | DPX205925DT-4226A2_ver1.0N_Dec172018 |
|------|--------------------------------------|
| Freq |                                      |
| 3300 | 49.79 / -4.69                        |
| 3800 | 45.9 / 2.75                          |
| 4400 | 50.91 / -13.36                       |
| 4900 | 53.68 / -4.27                        |
| 5000 | 53.71 / -5.97                        |
| 5150 | 51.48 / -8.37                        |
| 5925 | 39.73 / 8.36                         |

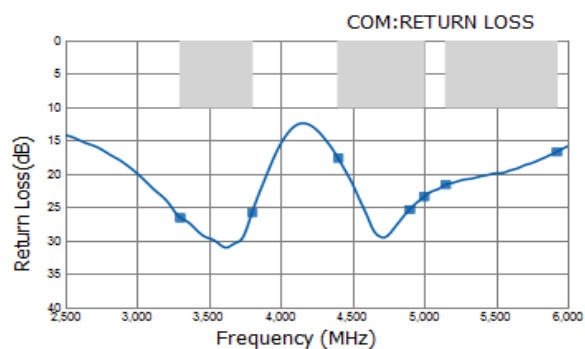

| P/N  | DPX205925DT-4226A2_ver1.0N_Dec172018 |
|------|--------------------------------------|
| Freq |                                      |
| 3300 | 26.56                                |
| 3800 | 25.77                                |
| 4400 | 17.62                                |
| 4900 | 25.29                                |
| 5000 | 23.39                                |
| 5150 | 21.57                                |
| 5925 | 16.65                                |


## DPX205925DT-4226A2

### RECOMMENDED LAND PATTERN

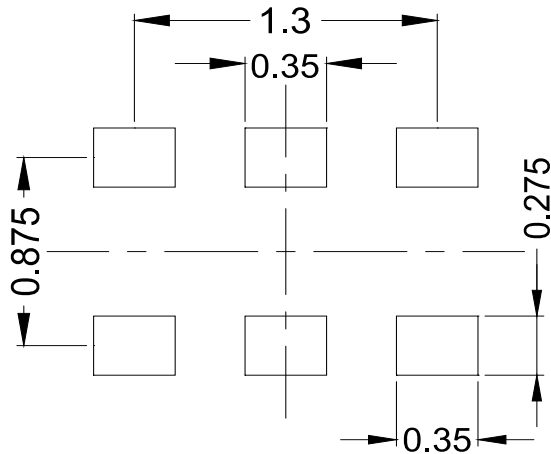

Unit: mm

### EVALUATION BOARD

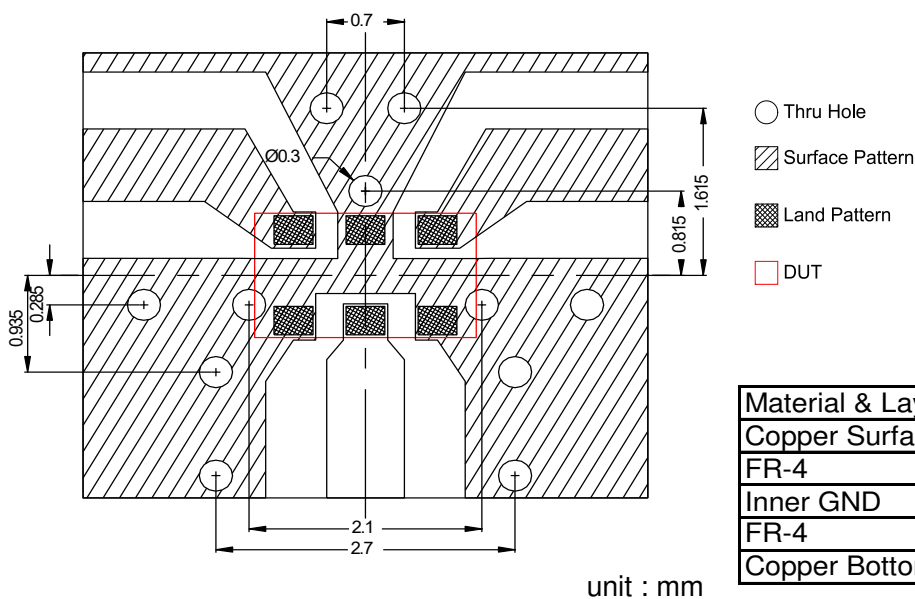


- Thru Hole
- ▨ Surface Pattern
- ▤ Land Pattern
- DUT

| Material & Layer       | Thickness |
|------------------------|-----------|
| Copper Surface Pattern | 0.035 mm  |
| FR-4                   | 0.10 mm   |
| Inner GND              | 0.018 mm  |
| FR-4                   | 0.30 mm   |
| Copper Bottom GND      | 0.035 mm  |

- \* Line width should be designed to match 50 ohm characteristic impedance depending on PCB material and thickness.
- \*\* The position of the thru hole which have possibility of influence to the performance are indicated by dimension line.
- \*\*\* Inner GND of under the signal lines are removed for keeping line impedance.

### ENVIRONMENT INFORMATION

RoHS Statement  
RoHS Compliance

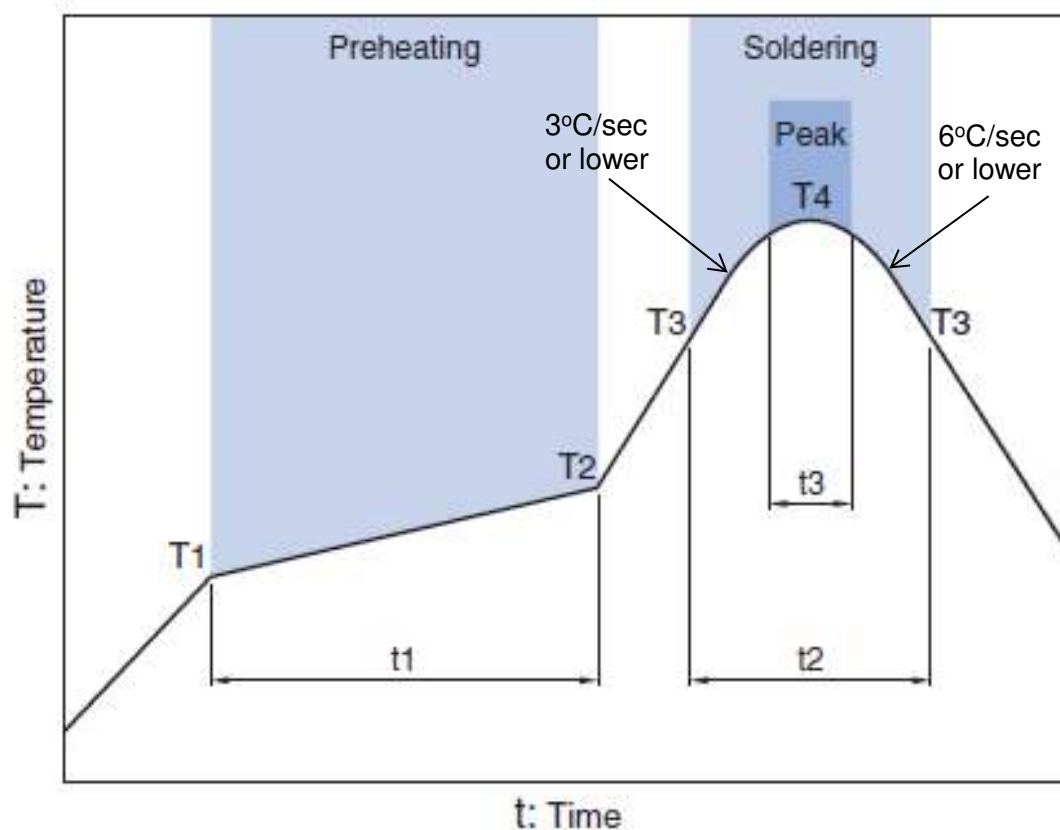**DPX205925DT-4226A2****RECOMMENDED REFLOW PROFILE**

| Preheating |       |              | Soldering                |              |              |            |
|------------|-------|--------------|--------------------------|--------------|--------------|------------|
|            |       |              | Critical zone (T3 to T4) |              | Peak         |            |
| Temp.      |       | Time         | Temp.                    | Time         | Temp.        | Time       |
| T1         | T2    | t1           | T3                       | t2           | T4           | t3 *       |
| 150°C      | 200°C | 60 to 120sec | 217°C                    | 60 to 120sec | 240 to 260°C | 30 sec Max |

\* t3 : Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

Note: Lead free solder is recommended.  
Recommended solder is Sn-3.0Ag-0.5Cu. (M705 by Senju Metal Industry)




May. 2021 Ver.5.0a  
TDK Corporation


## DPX205925DT-4226A2

### PACKAGING STYLE

Reel Dimensions

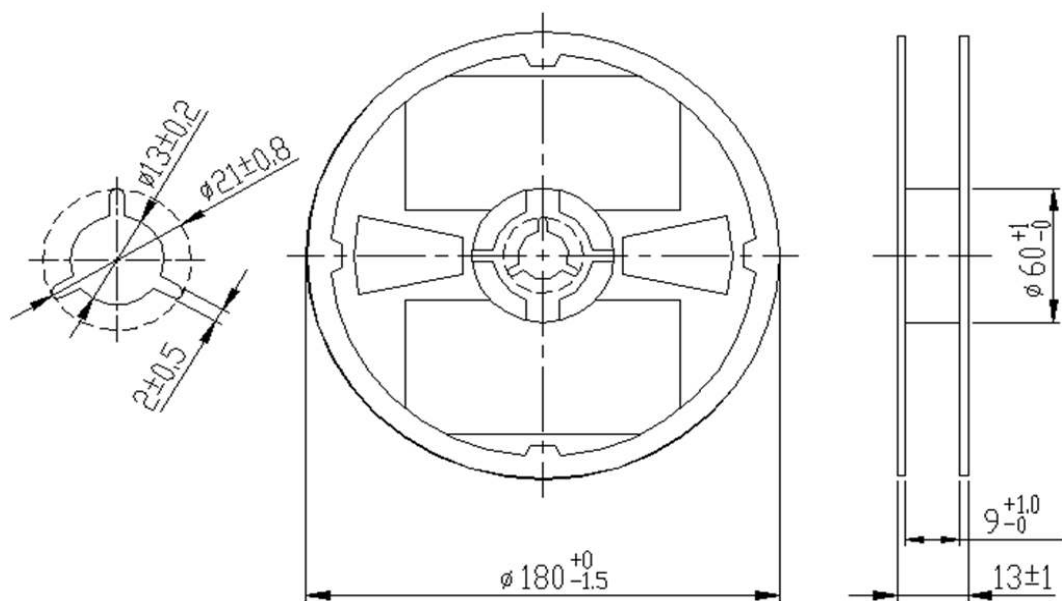

Dimensions in mm

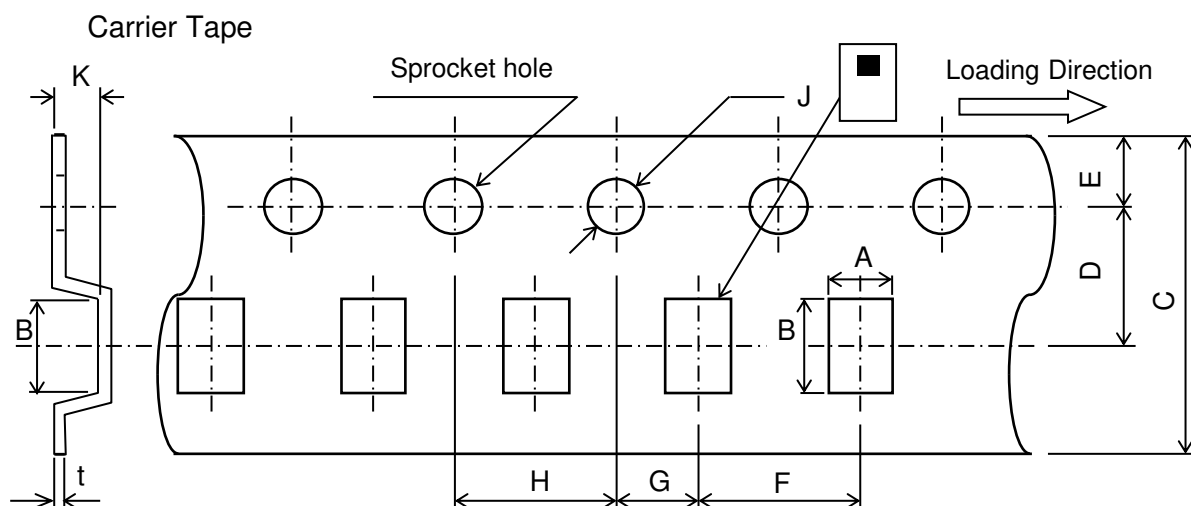

Dimensions (mm)

| A          | B          | C              | D          | E         | F         | G          | H         | J            | K   | t          |
|------------|------------|----------------|------------|-----------|-----------|------------|-----------|--------------|-----|------------|
| 1.45       | 2.2        | 8.0            | 3.5        | 1.75      | 4.0       | 2.0        | 4.0       | 1.5          | 0.8 | 0.25       |
| $\pm 0.05$ | $\pm 0.05$ | $\pm 0.3/-0.1$ | $\pm 0.05$ | $\pm 0.1$ | $\pm 0.1$ | $\pm 0.05$ | $\pm 0.1$ | $\pm 0.1/-0$ | MAX | $\pm 0.05$ |

| STANDARD PACKAGE QUANTITY<br>( pieces/reel ) |
|--|
| 2,000  |

## REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

#### REMINDERS

The products listed on this specification sheet are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet.

1. Aerospace/Aviation equipment
2. Transportation equipment (cars, electric trains, ships, etc.)
3. Medical equipment
4. Power-generation control equipment
5. Atomic energy-related equipment
6. Seabed equipment
7. Transportation control equipment
8. Public information-processing equipment
9. Military equipment
10. Electric heating apparatus, burning equipment
11. Disaster prevention/crime prevention equipment
12. Safety equipment
13. Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.