


NOTES:

1. MOLDED CONNECTOR END REQUIREMENTS:
 A: PVC - 65P BLUE, GREEN, BLACK, ORANGE, RED,
 GRAY, WHITE, OR YELLOW TO MATCH COLOR OF
 CABLE

NOTES:

CABLE: [24AWG(7/0.209)*4P]BARE
 INSULATION: HD-PE $OD=\phi 1.0\pm 0.02MM$
 COLOR: BL&WH/BL. OR&WH/OR. GN&WH/GN. BN&WH/BN
 JACKET: 80°C PVC $OD=\phi 5.3\pm 0.3MM$
 COLOR: CHOICE OF -- BLUE, GREEN, BLACK, ORANGE,
 RED, GRAY, WHITE, OR YELLOW
 PRINT: ENHANCED 350MHZ PATCH CORD 24AWG
 4PR 2035 E87647-DG AWM 60°C 30V
 LL58663 CSA AWM 80°C 30V FT1 ETL VE
 RIFIED TO TIA/EIA 568A CAT5e

568B PIN OUTS			
WIRE COLOR	RJ45 PLUG	RJ45 PLUG	WIRE COLOR
WHITE/ ORANGE	1	1	WHITE/ ORANGE
ORANGE	2	2	ORANGE
WHITE/GREEN	3	3	WHITE/GREEN
BLUE	4	4	BLUE
WHITE / BLUE	5	5	WHITE / BLUE
GREEN	6	6	GREEN
WHITE / BROWN	7	7	WHITE / BROWN
BROWN	8	8	BROWN

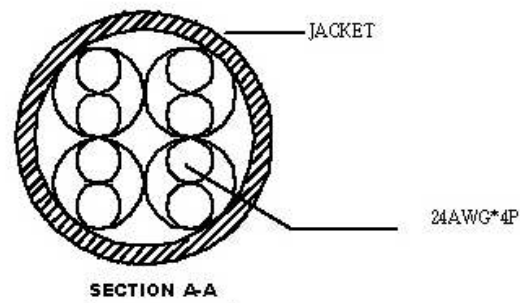

ITEM NO	PART NAMES	Q'TY	REMARK
2	PLUG: RJ45 MOLDED 8P8C	2PCS	
1	CABLE: 24AWG 4PR 350MHz CAT5e $OD=5.3\pm 0.3mm$	1PCS	

PRODUCT CODE DESCRIPTION

PC_10

COLOR OF CONNECTOR AND CABLE
 (CONSULT FACTORY FOR AVAILABLE COLORS)

PC_25	300 ±3
PC_20	240 ±3
PC_14	168 ±2
PC_10	120 ±2
PC_7	84 ±1
PC_5	60 ±1
PC_3	36 ±1
PC_2	24 ±1
PC_1	12 ±1
Part Number	L (inches)

INVENTORS

HellermannTyton

A SPIRENT Company
 ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON
 THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANN TYTON

name	date	city, state

REVISION

level	01
by	KAC
date	12/2/03
ECN #	-
part level	-

DIMENSIONS

TOLERANCES
 .XXXX =
 .XXX =
 .XX =
 .X = NOTED
 $\angle = \pm 0.5^\circ$
 unless otherwise specified
 units inches

PART

number	SEE CHART	phase	PRODUCTION
name	PC CATEGORY 5e PATCH CORDS		
material	SEE NOTES		

DRAWING

format	version N	AH	CAD	SW	scale	1:1
computer file number	XMI-JDI002CST_01		previous number			
drawn	K.A.C.	checked	approved			
date	12/2/03					
type	CUSTOMER		sheet 1 of 1			
number	XMI-JDI002CST					