
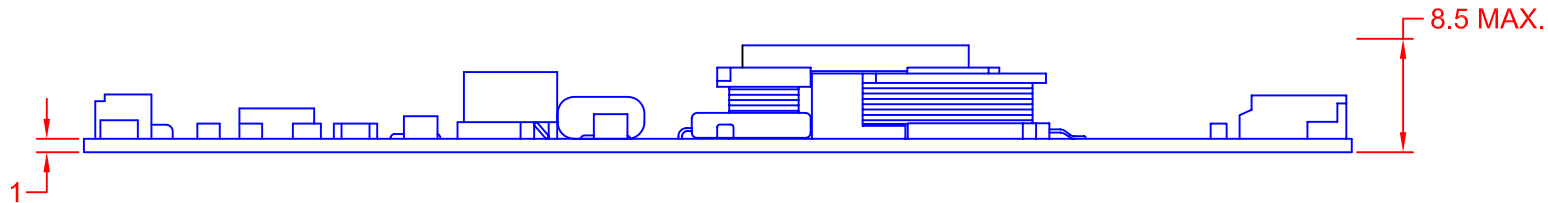


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	3/22/06
<b>A</b>	DELETE 2X OUTPUT CURRENT	10/13/06

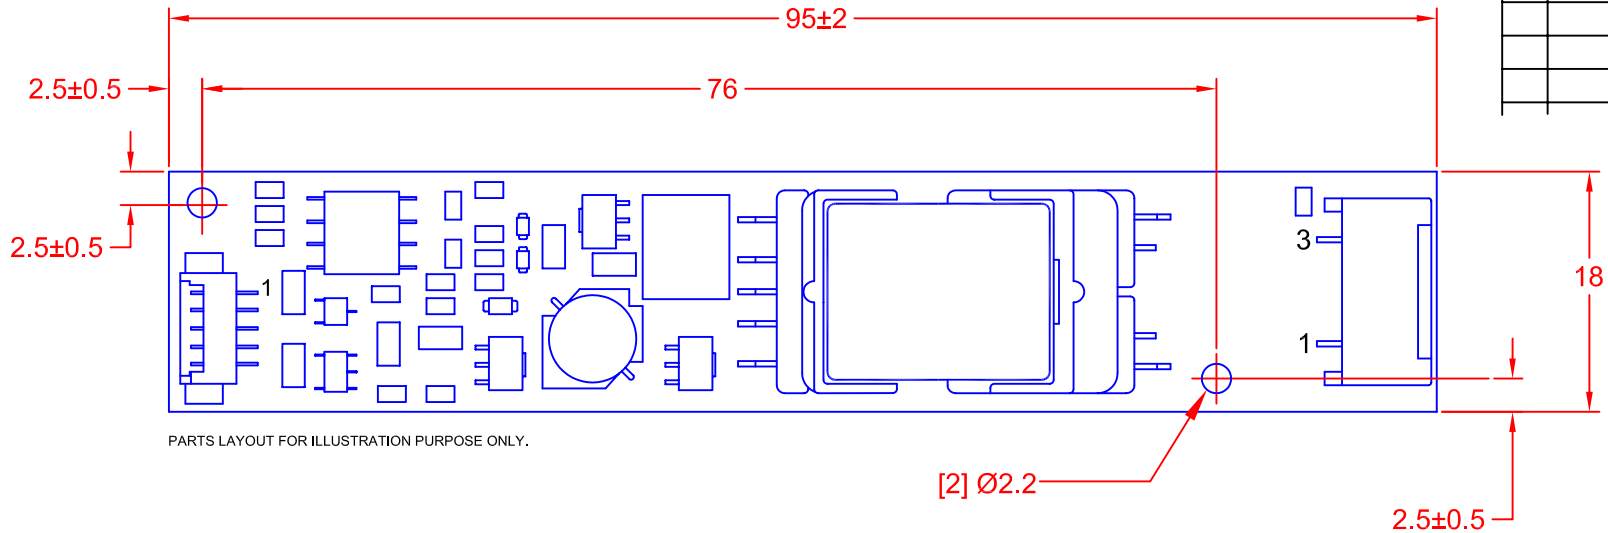

NO.	PIN NUMBER	MATING WIRE HARNESS
CN1	1 INPUT (+12V)	BXC-10549
	2 GND	
	3 CNT (L = ON)	
	4 VR1 (GND)	
	5 VR1 POTENTIOMETER (10K)	
CN2	1 OUTPUT (HV)	BXC-10643
	2 NO CONNECTION	
	3 OUTPUT (LV)	

#### OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	10.8	12.0	13.2
INPUT CURRENT: (mA)	200	230	260
OUTPUT VOLTAGE: (Vrms)	---	1200	----
OUTPUT CURRENT: (mArms)	4.5	5.0	5.5
OUTPUT FREQUENCY: (kHz)	55	65	75
DIMMING RANGE (OPTION)	40	---	100
OPERATING TEMP: (CELSIUS)	0	25	50

NOTE:  
MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER.  
JKL WIRE HARNESS BXC-10549 AND BXC-10643 CAN BE  
ORDERED SEPARATELY.

\*JKL PART NO.: BXA-12665-5M  
\*RoHS COMPLIANCE

<b>METRIC</b>  THIRD ANGLE PROJECTION	DIMENSIONS ARE IN MILLIMETERS	<b>JKL COMPONENTS CORPORATION</b> TITLE <b>DIMMING INVERTER</b>			
	TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.2 2 PL +/- ANGLE +/- 0				
DRAWN BY L. WENGSTROM	APPV'D BY DATE L.R. 10/13/06	SIZE <b>A</b>	FSCM NO. <b>55335</b>	DRAWING NO. <b>BXA-12665-5M</b>	
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED		SCALE <b>NONE</b>	RELEASED DATE <b>3/22/06</b>	REVISION DATE <b>10/13/06</b>	REV. NO. <b>A</b>
					SHEET <b>1</b> OF <b>1</b>