


# PVC INSULATED PIGGY BACK DISCONNECTS



## Specifications

- **Maximum Electrical Rating:** 300 Volts
- **Maximum Temperature:** +75°C
- **Terminal Material:** Brass
- **Plating:** Electro Tin Plated
- **Insulated Material:** Vinyl (PVC)

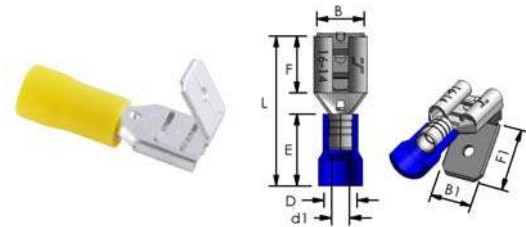

## Ordering Information:


Wire Range AWG / mm <sup>2</sup>	NTE Part Number	Dimensions inch(mm)								
		NEMA Tab	B	B1	F	F1	L	E	D	d1
22 – 18 AWG 0.5 – 1.5mm <sup>2</sup>	76-IPD22	.032 x .250 (0.8 x 6.4)	.260 (6.6)	.250 (6.4)	.315 (8.0)	.323 (8.2)	.827 (21.0)	.349 (10.0)	.157 (4.0)	.067 (1.7)
16 – 14 AWG 1.5–2.5mm <sup>2</sup>	76-IPD16	.032 x .250 (0.8 x 6.4)	.260 (6.6)	.250 (6.4)	.315 (8.0)	.323 (8.2)	.827 (21.0)	.349 (10.0)	.177 (4.5)	.091 (2.3)
12 – 10 AWG 4–6mm <sup>2</sup>	76-IPD12	.032 x .250 (0.8 x 6.4)	.260 (6.6)	.250 (6.4)	.315 (8.0)	.323 (8.2)	.925 (23.5)	.492 (12.5)	.217 (5.5)	.134 (3.4)

# NYLON INSULATED PIGGY BACK DISCONNECTS



## Specifications

- **Maximum Electrical Rating:** 300 Volts
- **Maximum Temperature:** +105°C
- **Terminal Material:** Brass
- **Plating:** Electro Tin Plated
- **Insulated Material:** Easy Entry Nylon

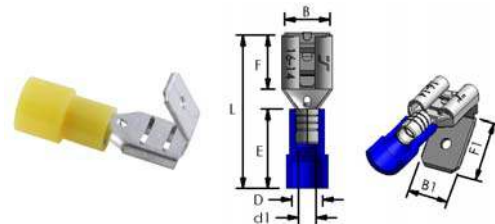

## Ordering Information:

Wire Range AWG / mm <sup>2</sup>	NTE Part Number	Dimensions inch(mm)								
		NEMA Tab	B	B1	F	F1	L	E	D	d1
22 – 18 AWG 0.5 – 1.5mm <sup>2</sup>	76-NIPD22	.032 x .250 (0.8 x 6.4)	.260 (6.6)	.250 (6.4)	.315 (8.0)	.323 (8.2)	.866 (22.0)	.433 (11.0)	.161 (4.1)	.067 (1.7)
16 – 14 AWG 1.5–2.5mm <sup>2</sup>	76-NIPD16	.032 x .250 (0.8 x 6.4)	.260 (6.6)	.250 (6.4)	.315 (8.0)	.323 (8.2)	.866 (22.0)	.433 (11.0)	.189 (4.8)	.091 (2.3)
12 – 10 AWG 4–6mm <sup>2</sup>	76-NIPD12	.032 x .250 (0.8 x 6.4)	.260 (6.6)	.250 (6.4)	.315 (8.0)	.323 (8.2)	.945 (24.0)	.512 (13.0)	.256 (6.5)	.134 (3.4)