

# SACC-MCI-MSS-4CON/1,5 PE SCO - Contact carrier



1162571

<https://www.phoenixcontact.com/us/products/1162571>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Assembled contact carrier and insulating body, S-coding, 3-pos. + PE, stranded wire length: 1.5 m

## Your advantages

- For compact devices: transmit high power in a confined space
- Convenient field assembly: device connectors for fast on-site mounting
- Customer-specific assemblies and litz wire lengths available
- Standard pin assignments for signal and power transmission with a uniform design-in design

## Commercial data

Item number	1162571
Packing unit	1 pc
Minimum order quantity	50 pc
Note	Made to order (non-returnable)
Sales key	AB27
Product key	ABQYAA
GTIN	4063151172640
Weight per piece (including packing)	22.22 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	85444290
Country of origin	DE

## Technical data

### Notes

General	<p>The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap &gt; IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.</p>
Safety note	<p><b>WARNING:</b> The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none"> <li>• <b>WARNING:</b> Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.</li> <li>• <b>WARNING:</b> Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.</li> <li>• The products are suitable for applications in plant, controller, and electrical device engineering.</li> <li>• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.</li> <li>• Assembled products may not be manipulated or improperly opened.</li> <li>• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a>).</li> <li>• When using the product in direct connection with third-party manufacturers, the user is responsible.</li> <li>• For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li> <li>• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li> <li>• Observe the corresponding technical data. You will find information: <ul style="list-style-type: none"> <li>o On the product</li> <li>o On the packing label</li> <li>o In the supplied documentation</li> <li>o Online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> under the product</li> </ul> </li> <li>• Only use tools recommended by Phoenix Contact</li> <li>• Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a></li> <li>• Ensure that the protective or functional ground has been properly connected.</li> </ul>

1162571

<https://www.phoenixcontact.com/us/products/1162571>

- VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
- The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

### Product properties

Product type	Contact insert
Sensor type	Power
Number of positions	4
No. of cable outlets	1
Shielded	no
Coding	S power

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated voltage in acc. with IEC 61076-2-101	630 V
Rated surge voltage	6 kV
	6 kV AC
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage $U_N$	630 V
Nominal current $I_N$	12 A
Test voltage	6 kV

### Interfaces

Signal type/category	Power
----------------------	-------

### Signaling

Status display	No
Status display present	No

### Material specifications

Flammability rating according to UL 94	V0
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6
Conductor material	Bare Cu litz wires

### Cable/line

Cable length	1.5 m
Cable type	UL/cUL stranded hook-up wire

# SACC-MCI-MSS-4CON/1,5 PE SCO - Contact carrier



1162571

<https://www.phoenixcontact.com/us/products/1162571>

Signal type/category	Power
Wire diameter incl. insulation	2.2 mm
Single wire, color	black numbered, black numbered, black numbered, green-yellow
Conductor material	Bare Cu litz wires
AWG signal line	16
Material wire insulation	mPPE
Halogen-free	yes
Flame resistance	in acc. to UL 1581 VW1
Ambient temperature (operation)	-40 °C ... 105 °C (cable, fixed installation) -20 °C ... 105 °C (Cable, flexible installation)

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP67 IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket) -20 °C ... 105 °C (Cable, flexible installation) -40 °C ... 105 °C (cable, fixed installation)

## Standards and regulations

Flame resistance	in acc. to UL 1581 VW1
------------------	------------------------

### M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-111
Note	In line with

## Mounting


Mounting type	Rear mounting
Connection method	Individual wires

1162571


<https://www.phoenixcontact.com/us/products/1162571>

## Drawings

Circuit diagram

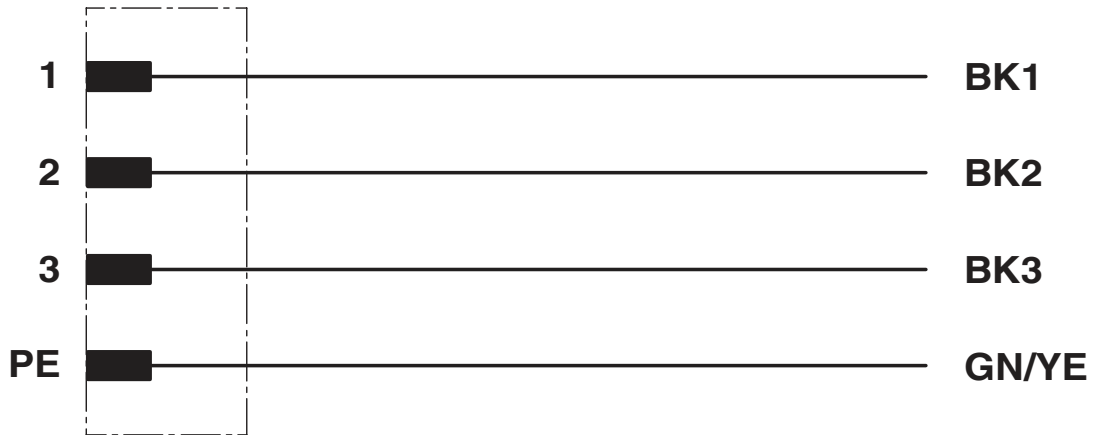

Schematic diagram

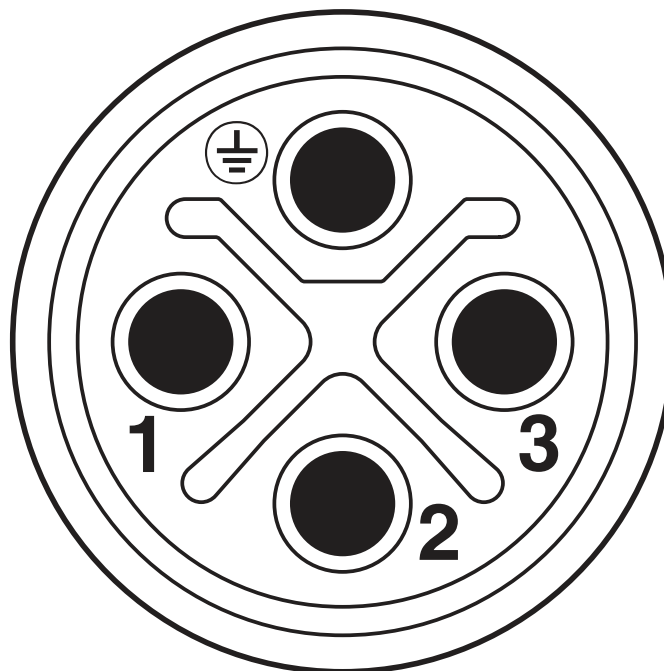

M12 plug pin assignment, 4-pos., S-coded, plug side view

1162571

<https://www.phoenixcontact.com/us/products/1162571>

## Classifications

### ECLASS

ECLASS-11.0

27440102

### ETIM

ETIM 7.0

EC002635

### UNSPSC

UNSPSC 21.0

39121413

# SACC-MCI-MSS-4CON/1,5 PE SCO - Contact carrier



1162571

<https://www.phoenixcontact.com/us/products/1162571>

## Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 50 years For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"
------------	--

# SACC-MCI-MSS-4CON/1,5 PE SCO - Contact carrier



1162571

<https://www.phoenixcontact.com/us/products/1162571>

## Accessories

### SACC-MSQ-P-M12MS-25-2,7 SCO - Housing screw connection

1424131

<https://www.phoenixcontact.com/us/products/1424131>



Housing screw connection, Front mounting, square flange 25 mm side length,  
Square flange

---

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)