
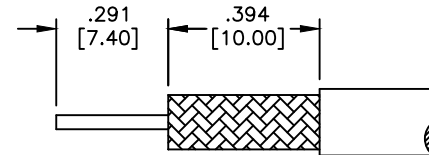



PART NO.

RFD-4195MRA-SR2

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	10/26/17	JDMc

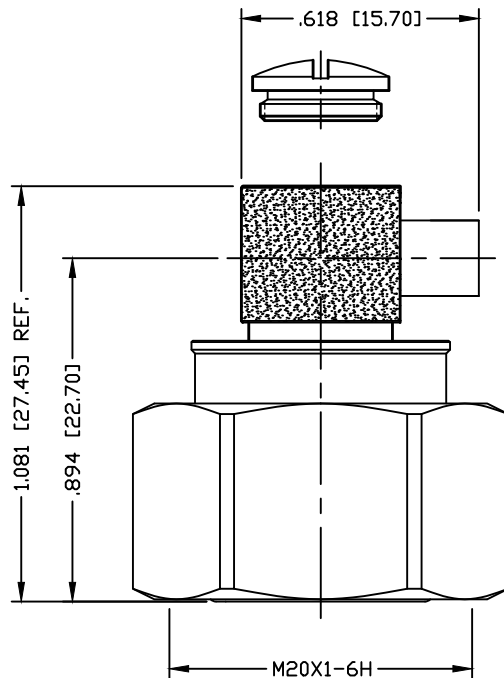

RECOMMENDED STRIPPING DIMENSIONS

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-6 GHz
 VSWR: <1.17:1 THRU 3 GHz
 INSERTION LOSS: >-.1dB
 3rd ORDER IM: < -155 dBc
 TEMPERATURE RANGE: -55°C TO 150°C
 FOR TFT-402

#	DESCRIPTION	QTY	MATERIAL	FINISH
8	COUPLING NUT	1	BRASS	WHITE BRONZE
7	O-RING	1	RUBBER	---
6	SCREW CAP	1	BRASS	WHITE BRONZE
5	RETAINING RING	1	Be.Cu.	---
4	INSULATOR	1	PTFE	---
3	PIN	1	BRASS	SILVER
2	INSULATOR	1	PTFE	---
1	BODY	1	BRASS	WHITE BRONZE

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN C. ZUNIGA	10/26/17
CHECKED	
ORJ DRAWN C. ZUNIGA	10/26/17

**RoHS
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES. ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX
 RFINDUSTRIES.COM
 7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340

4.1/9.5 PLUG, SOLDER
RIGHT ANGLE

SIZE	CABLE GROUP	DWG NO.	REV
A	SR2	RFD-4195MRA-SR2	---
SCALE: NTS	ENGINEERING ID: 001787	SHEET 1 OF 1	