
Ŧ	D	г п	m		0
				_	





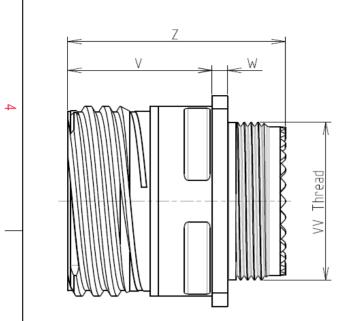

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
-Shell Plating	: Without Plating				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	-65℃ to +175℃				

: 2000 hours

: 13.3 g ± 10%

8D 0

G

11

Х

01

В

F

С


Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : C

CONTACT LAYOUT : 11-01

CONTACT TYPE : SOCKET(500 Matings)

Е



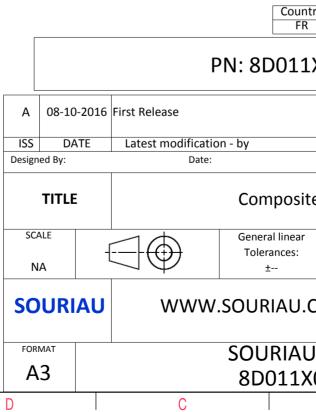

	ω		А			
					4	
AS EXA	AMPLE				3	
s whic er of t	non-conformit ch does not co he Parties or t on, technical n	mply with by a third pa				
untry FR	Jurisd	liction & Co Not Liste			2	
1X01BC						
				MOD N°		
		CUSTOM	IER DRAWING	MODIN		
site	te Receptacle 8D series					
ar :	NPRDS / PROJECT 859				1	
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
.XU	1BC-C B		A	1/2	J	
	-	1				

		G	ار (m		0
		Contact Layout				Panel Cutout
4		01			Â	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	-	1#12 11-01]		Σ 	
ى س	Ctc A	X Y 0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of
22						(professional recommendati Country FR PN: 8D011X
					A 08-10-20 ISS DATE Designed By:	16 First Release
_					TITLE SCALE NA	Composite General linear Tolerances: ±
					FORMAT A3	U WWW.SOURIAU.CO SOURIAU 8D011X0
	H	G	F	E	D	C

