
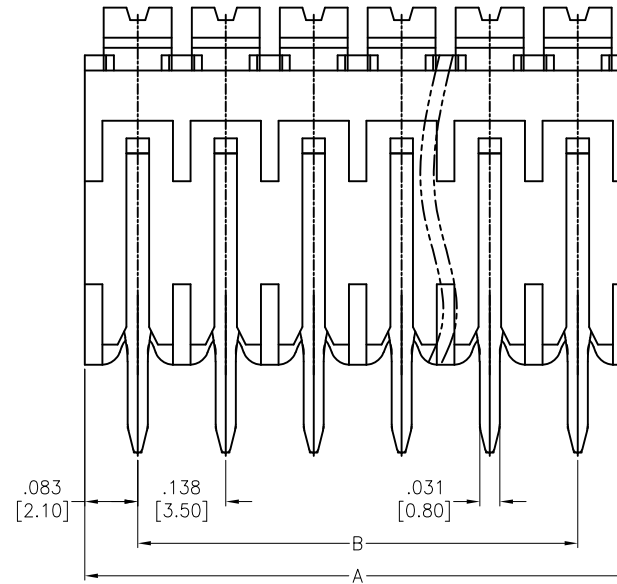
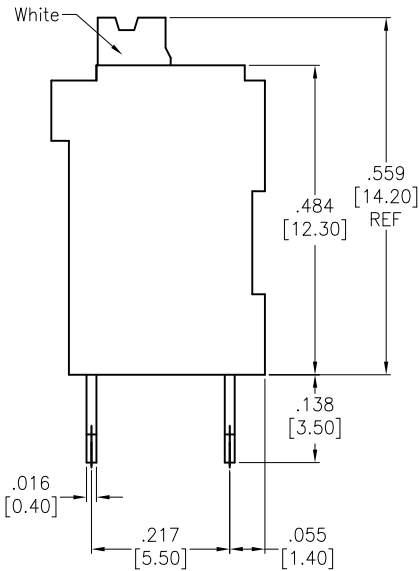
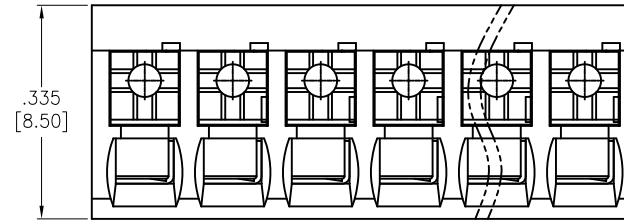


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/1/16	
A		UPDATE DRAWING	9/30/20	AY/DH

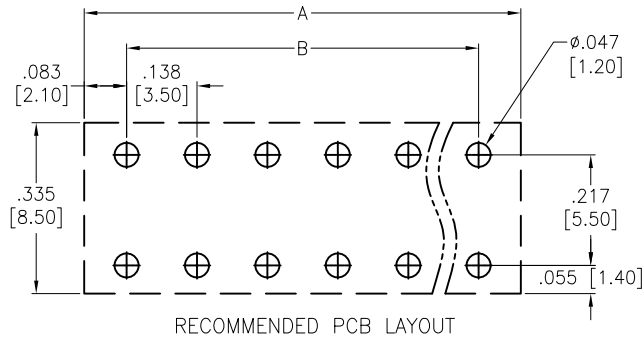

SPECIFICATIONS:

Material:
 Insulator: LCP, rated UL 94V-0
 Insulator color: Black
 Contact: Copper Alloy, Tin plated

Electrical:
 Voltage rating: 300V
 Current rating: 10 A
 Withstanding Voltage: 1600 V/1 Min

Mechanical:
 Wire range: 24-16 AWG
 Stripping length: 7~8mm
 Temperature Rating:
 Operating temperature: -40°C to +130°C

ENVIRONMENTAL:
 Lead free, rohs compliant.



Positions: 02 thru 24
 A = .135 [3.50] x No. of Spaces + .165 [4.20]
 B = .135 [3.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS DRAWN AY 6/2/16 CHECKED AT 6/2/16 APPROVED		DATE DATE DATE DATE	
TITLE EURO BLOCK, .135 [3.50] PITCH		SIZE X	PART NO. EB142A-XX-A-180
REF: S00067C		SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1

D

D

C

C

B

B

A

A

6

5

4

3

2

1