


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00314	Connector, dc plug, 5.5x2.5xL21mm, brass, nickel plated, molding type, white insulators	1	
2	50-00027	Connector, dc jack, 5.5x2.5xL17.4 mm, molding style	1	
3	30-00396	Wire, 2C TS, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A, white	1	
4	24-00003	Overmold, PVC, white	1	
5	24-00004	Overmold, PVC, white	1	

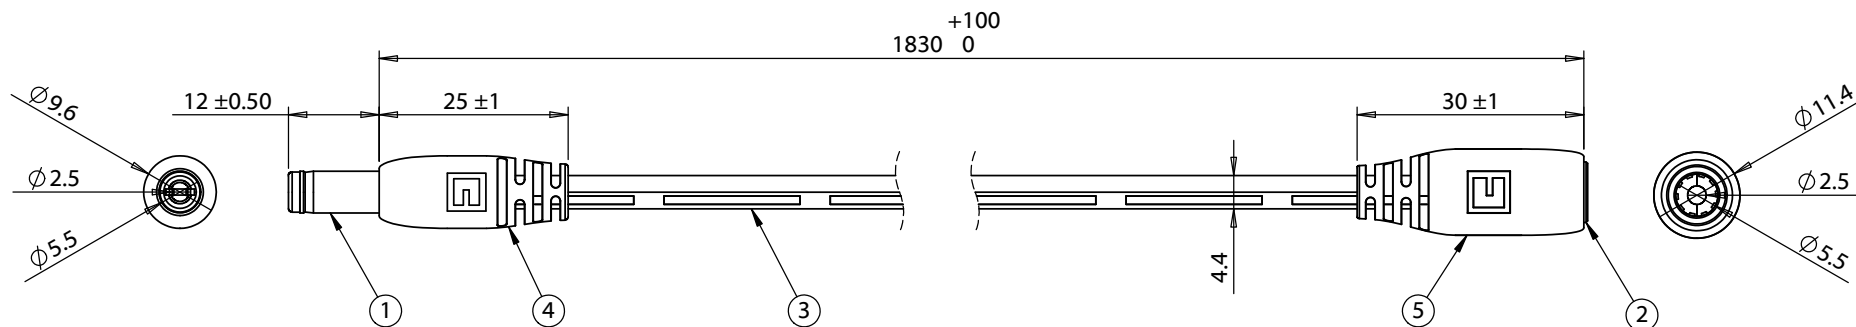

Notes:

Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

7 A, 12 Vdc

Wiring Diagram		
50-00314	wire color	50-00027
center	white with stripe	center
sleeve	white	sleeve

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	12/15/2015	Initial release	GL 2016.05.18 15:39:10 -07'00'		
			Verified:	Function test: no open, no short circuit, no intermittent	Size: Part number: A 10-01253
			LA Digitally signed by LA DN: cn=LA, o=Tensility, ou=Engineering, email=la@tensility.com, c=US Date: 2016.05.18 16:39:17 -07'00'		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Scale: 1:2
				Cable, 1830 mm, 5.5x2.5x12mm 50-00314 plug to 5.5x2.5mm 50-00027 jack, 18 AWG, 30-00396 wire, white	Sheet 1 of 1