

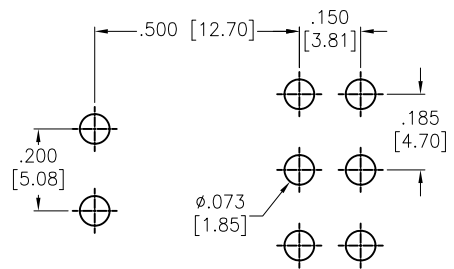


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/17/21	

APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

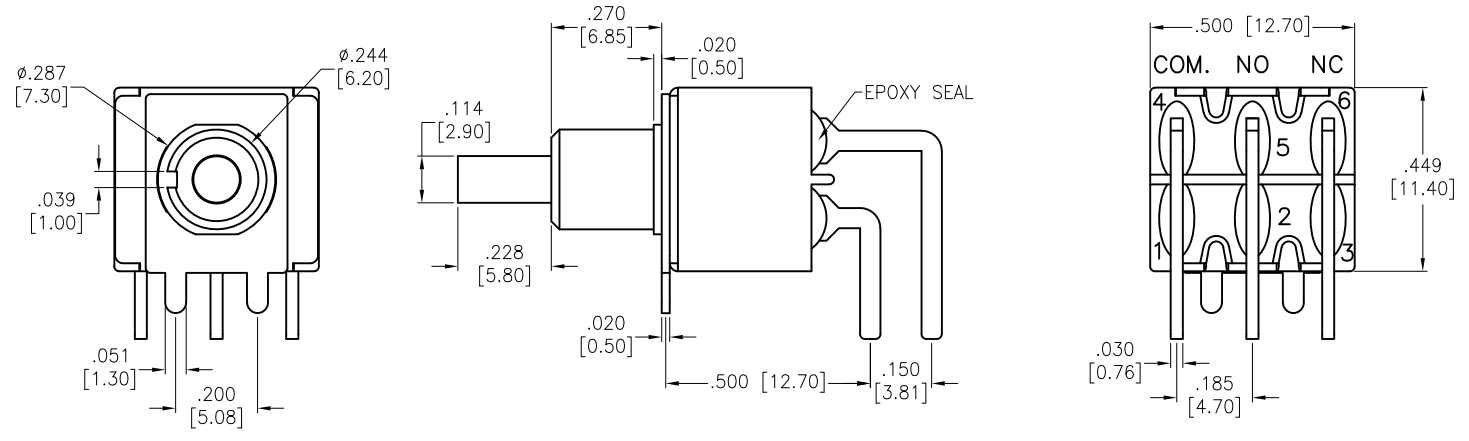

RECOMMENDED PCB LAYOUT

CIRCUIT DIAGRAM (DPDT) ON-MOMENTARY

SPECIFICATIONS:  
Material:  
Movable Contact: Copper Alloy, Silver Plated  
Terminal: Copper Alloy, Silver Plated  
Electrical:  
Voltage rating: 120VAC or 38VDC  
Current rating: 1 Amps  
Contact resistance: 10 m $\Omega$  max  
Insulation resistance: 1,000 Mohms min  
Dielectric withstanding voltage: 1,500V RMS @Sea level  
Temperature Rating:  
Operating temperature: -30°C to +85°C  
Environmental:  
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES		HOLES
.X	$\pm .10$	$\phi X$ $\pm .10$
.XX	$\pm .020$	$\phi XX$ $\pm .015$
.XXX	$\pm .015$	$\phi XXX$ $\pm .010$
APPROVALS		DATE
DRAWN	LH	2/17/21
CHECKED	AC	2/17/21
APPROVED		

**ADAM TECH** 909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

TITLE: SNAP-ACTING PUSH BUTTON SWITCH, RIGHT ANGLE  
DPDT, ON-MOMENTARY, SILVER PLATED, PCB TYPE

SIZE X	PART NO. SW-PB8-BB00B6QE-1	REV. -
REF: S00198T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1

D

D

C

C

B

B

A

A

6

5

4

3

2

1