

т	۵	п –	т	0



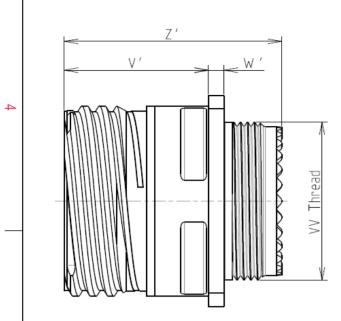



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite			
2	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	: -65°C to +200°C			
	-Salt Spray	: 2000 hours			
	-Mass	: 10.2 g ± 10%			

8D 0

G

11

Μ

04

Ρ

F

Е

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M15x1-6g


ORIENTATION : E

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-04

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

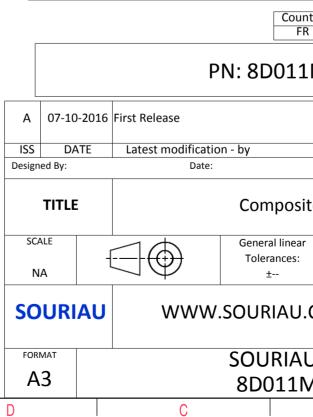

σ		А			
				4	
C				3	
S EXAMPLE					
any non-conformi which does not co of the Parties or I adation, technical n	mply with by a third part				
R	Not Listed			2	
1M04PE					
			1		
	CUSTOME	R DRAWING	MOD N°		
ite Receptac	te Receptacle 8D series				
ar	NPRDS / PROJECT				
		<b>59</b> cument is the prop	erty of	1	
.COM SOURIAU it must not be reproduced or communicated without permission					
	1		SHEET		
M04PE-C		A	1/2	J	
2	1				

r	Ŧ	۵	н <b>г</b>	m		0	
		Contact Layout					Panel Cutou
4	-x_	$ \begin{array}{c}                                     $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Shell Arrangement Numt size no. cont 11 -4 4	V-axis (mm)         Y-axis (mm)           + 0.65 (1.65)         .065 (1.65)           + 0.05 (1.65)         .065 (1.65)           - 0.05 (1.65)         .065 (1.65)           - 0.05 (1.65)         .065 (1.65)           - 0.05 (1.65)         .065 (1.65)           ber of tacts         Size contacts         Service rating         Contact         Supersedes				ØA	
ω						Din ØA ØA R1 ØT	A A
	-					SOURIAU shall not be due to a use of the the Specifications issued (professional re	Products whi d by either of
N							Country FR
					A 07-10-20 ISS DATE Designed By:	116 First Release	3D011N
					TITLE	Co	omposite
<b>_</b>					NA SOURIA		JRIAU.C
					FORMAT A3		URIAU D011M
	Н	G	F	E	D	C	

