

GLOBAL PERFORMANCE SWITCHERS

FEATURES:

- Industry's smallest 15 W medically approved switcher
- Compact size (3.00" x 2.10" x 0.92")
- Wide-range ac input: 90-264 Vac
- Less than 75 μ A leakage current @ 120 Vac
- Approved to UL2601-1, EN60601-1
- EMI to FCC, CISPR 11 Class B
- Overvoltage protection standard
- RoHS compliant models available (G suffix)
- CE marked to LVD



SPECIFICATIONS

<p>Ac Input 90-264 Vac, 47-63 Hz single phase. Class I or class II grounding.</p>	<p>Temperature Coefficient 0.03% / °C typical.</p>																								
<p>Input Current Maximum input current at 90 Vac, 60 Hz with full rated output load not to exceed 0.6 A.</p>	<p>EMI/EM Compliance All models include built-in EMI filtering to meet the following EMC requirements of IEC601-1-2.</p> <table border="1"> <thead> <tr> <th>Performance Requirement</th> <th>EMC Standard</th> <th>Typical Margin</th> </tr> </thead> <tbody> <tr> <td>Conducted Emissions</td> <td>EN55011, Class B; FCC Class B</td> <td>2 dB Class II Gnd 6 dB Class I Gnd</td> </tr> <tr> <td>Surge Discharge</td> <td>EN61000-4-2, Level 3</td> <td>2 kV</td> </tr> <tr> <td>RF Field Susceptibility</td> <td>EN61000-4-3, Level 3</td> <td>2 V</td> </tr> <tr> <td>Fast Transients/Bursts</td> <td>EN61000-4-4, Level 3</td> <td>500 V</td> </tr> <tr> <td>Surge Susceptibility</td> <td>EN61000-4-5, Level 3</td> <td>500 V</td> </tr> <tr> <td>Conducted RF Susceptibility</td> <td>EN61000-4-6</td> <td>25%</td> </tr> <tr> <td>Voltage Sags & Surges</td> <td>EN61000-4-11</td> <td>5%</td> </tr> </tbody> </table>	Performance Requirement	EMC Standard	Typical Margin	Conducted Emissions	EN55011, Class B; FCC Class B	2 dB Class II Gnd 6 dB Class I Gnd	Surge Discharge	EN61000-4-2, Level 3	2 kV	RF Field Susceptibility	EN61000-4-3, Level 3	2 V	Fast Transients/Bursts	EN61000-4-4, Level 3	500 V	Surge Susceptibility	EN61000-4-5, Level 3	500 V	Conducted RF Susceptibility	EN61000-4-6	25%	Voltage Sags & Surges	EN61000-4-11	5%
Performance Requirement	EMC Standard	Typical Margin																							
Conducted Emissions	EN55011, Class B; FCC Class B	2 dB Class II Gnd 6 dB Class I Gnd																							
Surge Discharge	EN61000-4-2, Level 3	2 kV																							
RF Field Susceptibility	EN61000-4-3, Level 3	2 V																							
Fast Transients/Bursts	EN61000-4-4, Level 3	500 V																							
Surge Susceptibility	EN61000-4-5, Level 3	500 V																							
Conducted RF Susceptibility	EN61000-4-6	25%																							
Voltage Sags & Surges	EN61000-4-11	5%																							
<p>Input Protection Internal ac fuse provided on all units. Designed to blow only if a catastrophic failure occurs in the unit -- Fuse does not blow on unsustained overload or short circuit.</p>	<p>Medical Safety Approvals All models are Certified to be in compliance with the applicable requirements of UL2601-1, IEC60601-1, CSA-C22.2 No. 601-1, EN60601-1.</p>																								
<p>Inrush Current Inrush is limited by internal thermistors. The inrush at 240 Vac, averaged over the first ac half-cycle under cold start conditions will not exceed 37 A.</p>	<p>Leakage Current The maximum leakage current for GSM15 series will be as follows;</p>																								
<p>Efficiency 69-85% depending on model.</p>	<p>132Vac/60Hz UL2601-1 test method</p> <table border="1"> <thead> <tr> <th></th> <th>GND</th> <th>Connection Normal</th> <th>Single Fault</th> </tr> </thead> <tbody> <tr> <td>Class I</td> <td></td> <td>75 μA</td> <td>105 μA</td> </tr> <tr> <td>Class II</td> <td></td> <td>39 μA</td> <td>54 μA</td> </tr> </tbody> </table>		GND	Connection Normal	Single Fault	Class I		75 μ A	105 μ A	Class II		39 μ A	54 μ A												
	GND	Connection Normal	Single Fault																						
Class I		75 μ A	105 μ A																						
Class II		39 μ A	54 μ A																						
<p>Overload Protection Fully protected against short circuit and output overload. Short circuit protection is cycling type power limit. Factory set to begin power limiting at 23 W.</p>	<p>264Vac/50Hz IEC60601-1 test method</p> <table border="1"> <thead> <tr> <th></th> <th>GND</th> <th>Connection Normal</th> <th>Single Fault</th> </tr> </thead> <tbody> <tr> <td>Class I</td> <td></td> <td>128 μA</td> <td>180 μA</td> </tr> <tr> <td>Class II</td> <td></td> <td>66 μA</td> <td>94 μA</td> </tr> </tbody> </table>		GND	Connection Normal	Single Fault	Class I		128 μ A	180 μ A	Class II		66 μ A	94 μ A												
	GND	Connection Normal	Single Fault																						
Class I		128 μ A	180 μ A																						
Class II		66 μ A	94 μ A																						
<p>Overvoltage Protection Built in OVP on all models. Approximately 120-140% of output voltage.</p>																									
<p>Output Noise 0.5% rms, 1% Pk-Pk, 20 MHz Bandwidth, differential mode. Measured with noise probe directly across output terminals of the power supply.</p>																									
<p>Transient Response Main Output - 500 μs max. response time for return to within 0.5% of final value for a 50% load step change, $\Delta i / \Delta t < 0.2$ A/μs. Maximum voltage deviation is 3.5%.</p>																									
<p>Hold-up Time 10 ms minimum from loss of ac input voltage at full load, nominal line (120 Vac).</p>																									

Medical Model	Voltage Output	Min.	Normal (A)	Peak (B)	Initial Set Point	OVP Setpoint	Total Regulation	Ripple and Noise
GSM15-5	5.1 V	0 A	2.35 A	3 A	2.5%	7.2 V	2%	1%
GSM15-12	12 V	0 A	1.25 A	1.5 A	2.5%	16 V	2%	1%
GSM15-15	15 V	0 A	1.0 A	1.2 A	2.5%	21 V	2%	1%
GSM15-24	24 V	0 A	0.625 A	0.75 A	2.5%	32 V	2%	1%
GSM15-28	28 V	0 A	0.54 A	0.64 A	2.5%	280 V	2%	1%

Notes:

- A. Rating with unrestricted convection cooling.
- B. Peak Power for 60 sec. 10% duty cycle or continuous rating with 150 LFM of airflow.
- C. Output voltages preset at factory, not user adjustable.
- D. Add "G" suffix to model number for RoHS compliant model.


GSM15 MECHANICAL SPECIFICATIONS

INPUT: J1 AMP P/N 640456-4
 PIN 1) AC LINE
 PIN 2) N/C
 PIN 3) N/C
 PIN 4) AC NEUTRAL
 GND: 0.098 DIA. THRU HOLE

OUTPUT: J2 AMP P/N 640456-4
 PIN 1) COMMON Return
 PIN 2) COMMON Return
 PIN 3) OUTPUT #1 + Vout
 PIN 4) OUTPUT#1 +Vout

MATING CONNECTOR AMP P/N
 MTA – 100 Receptacle

NOTE: 3A MAXIMUM RECOMMENDED
 CURRENT PER CONNECTOR PIN

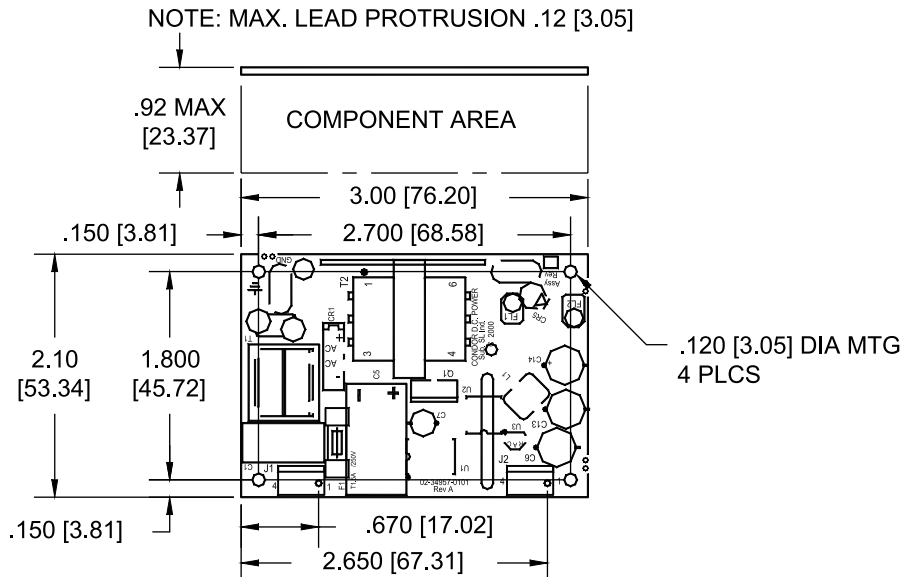

Overall Dimensions:
 3.00 x 2.10 x .92 inches
 76.20mm x 53.34mm x 23.37mm
 Weight: 0.25 LBS. [.113 kg]
 MAX.

ENVIRONMENTAL SPECIFICATIONS	OPERATING	NON-OPERATING
Temperature (A)	0 to 50° C	-40 to +85°C
Humidity (A)	0 to 95% RH	0 to 95% RH
Shock (B)	20 g _{pk}	40 g _{pk}
Altitude	-500 to 10,000 ft	-500 to 40,000 ft
Vibration (C)	1.5 g _{rms} 0.003 g ² /Hz	5 g _{rms} 0.026 g ² /Hz

A. Units should be allowed to warm up/operate under non-condensing conditions before application of power.

B. Shock testing—half-sinusoidal, 10 ± 3 ms duration, ± direction, 3 orthogonal axes, total 6 shocks.

C. Random vibration—10 to 2000Hz, 6dB/octave roll-off from 350 to 2000Hz, 3 orthogonal axes. Tested for 10 min./axis operating and 1 hr./axis non-operating.