



**SD-US/SC/LA/GY**

Order No.: 2963860

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2963860>Rail-mountable socket, with light indicator, housing color: gray, with  
screw connection, national version: USA, housing width 45 mm**Commercial data**

GTIN (EAN)	 4 017918 859138
sales group	H070
Pack	10 pcs.
Customs tariff	85366990
Catalog page information	Page 603 (IF-2009)

**Product notes**WEEE/RoHS-compliant since:  
07/20/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General data**

Nominal voltage $U_N$	125 V AC
Nominal current $I_N$	15 A AC
Status display	Glow lamp or LED with preresistor

Contact material	CuZn37
For country-specific use in	USA
Color	gray
Insulating material	PA
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 60 °C
Standards/regulations	IEC 83
	DIN 49440-1
	UL 498
Width	45 mm
Height	75 mm
Depth	70.5 mm

#### Connection data

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	30
Conductor cross section AWG/kcmil max	12
Type of connection	Screw connection
Stripping length	8 mm
Screw thread	M3

#### Certificates / Approvals




Certification

CUL Listed, GOST, UL Listed

**Diagrams/Drawings**

Circuit diagram

---

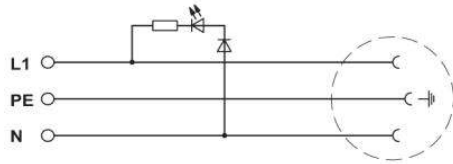

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;