5227222-6 - ACTIVE

TE Internal #: 5227222-6 BNC RF Interface, Jack, 50 Ω, Bayonet, 4 GHz Operating Frequency, Cable-to-Board / Cable-to-Panel, 1 Position, Printed Circuit Board, Panel Mount

View on TE.com >



Connectors > RF Connectors > Coax Connectors > BNC Vertical Jack RF Connector, 50 Ohm, Bayonet Coupling Mechanism



RF Interface: BNC

RF Connector Style: Jack

RF Connector Mated Outer Diameter (Approximate): 14.53 mm [.572 in]

Impedance: 50Ω

RF Connector Coupling Mechanism: Bayonet

All BNC Vertical Jack RF Connector, 50 Ohm, Bayonet Coupling Mechanism (32)

Features

Product Type Features

RF Interface	BNC
RF Connector Style	Jack
Connector System	Cable-to-Board, Cable-to-Panel
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
PCB Mount Orientation	Vertical
Number of Positions	1
Number of Coaxial Contacts	1
Electrical Characteristics	
Impedance	50 Ω
Body Features	
Body Material	Polyester, PBT

BNC RF Interface, Jack, 50 Ω , Bayonet, 4 GHz Operating Frequency, Cable-to-Board / Cable-to-Panel, 1 Position, Printed Circuit Board, Panel Mount



Body Material Finish	Passivated
Body Plating Material	Nickel
Contact Features	
RF Connector Center Contact Underplating Material	Nickel
	889 µin
RF Connector Center Contact Plating Material	Gold
RF Connector Center Contact Material	Phosphor Bronze
Termination Features	
Termination Post & Tail Length	5.33 mm[.21 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Panel Attachment Style	Rear Mount
PCB Mount Retention	With
RF Connector Coupling Mechanism	Bayonet
Connector Mounting Type	Panel Mount
RF Contact Captivation Method	Mechanical
Detent	With

Housing Features

Housing Color	Black
Dimensions	
Mounting Post Length	3.48 mm[.137 in]
Profile Height from PCB	34.93 mm[1.375 in]
RF Connector Mated Outer Diameter (Approximate)	14.53 mm[.572 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
Operation/Application	
Operating Frequency	4 GHz
Packaging Features	
Packaging Method	Tube
Other	

C For support call+1 800 522 6752

BNC RF Interface, Jack, 50 Ω, Bayonet, 4 GHz Operating Frequency, Cable-to-Board / Cable-to-Panel, 1 Position, Printed Circuit Board, Panel Mount



RF Connector Comment	If an Insulating Bushing is required, see Part Number 330620., Lockwasher and Jam Nut must be ordered separately.
Grade	Commercial
Dielectric Material	Polymethylpentene

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU ELV Directive 2000/53/EC

China RoHS 2 Directive MIIT Order No 32, 2016

EU REACH Regulation (EC) No. 1907/2006

Halogen Content

Solder Process Capability

Compliant with Exemptions

Compliant with Exemptions

Restricted Materials Above Threshold

Current ECHA Candidate List: JUNE 2023 (235)

Candidate List Declared Against: JUNE

2023 (235)

SVHC > Threshold:

Pb (3.7% in Component Part)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

BNC RF Interface, Jack, 50 Ω, Bayonet, 4 GHz Operating Frequency, Cable-to-Board / Cable-to-Panel, 1 Position, Printed Circuit Board, Panel Mount



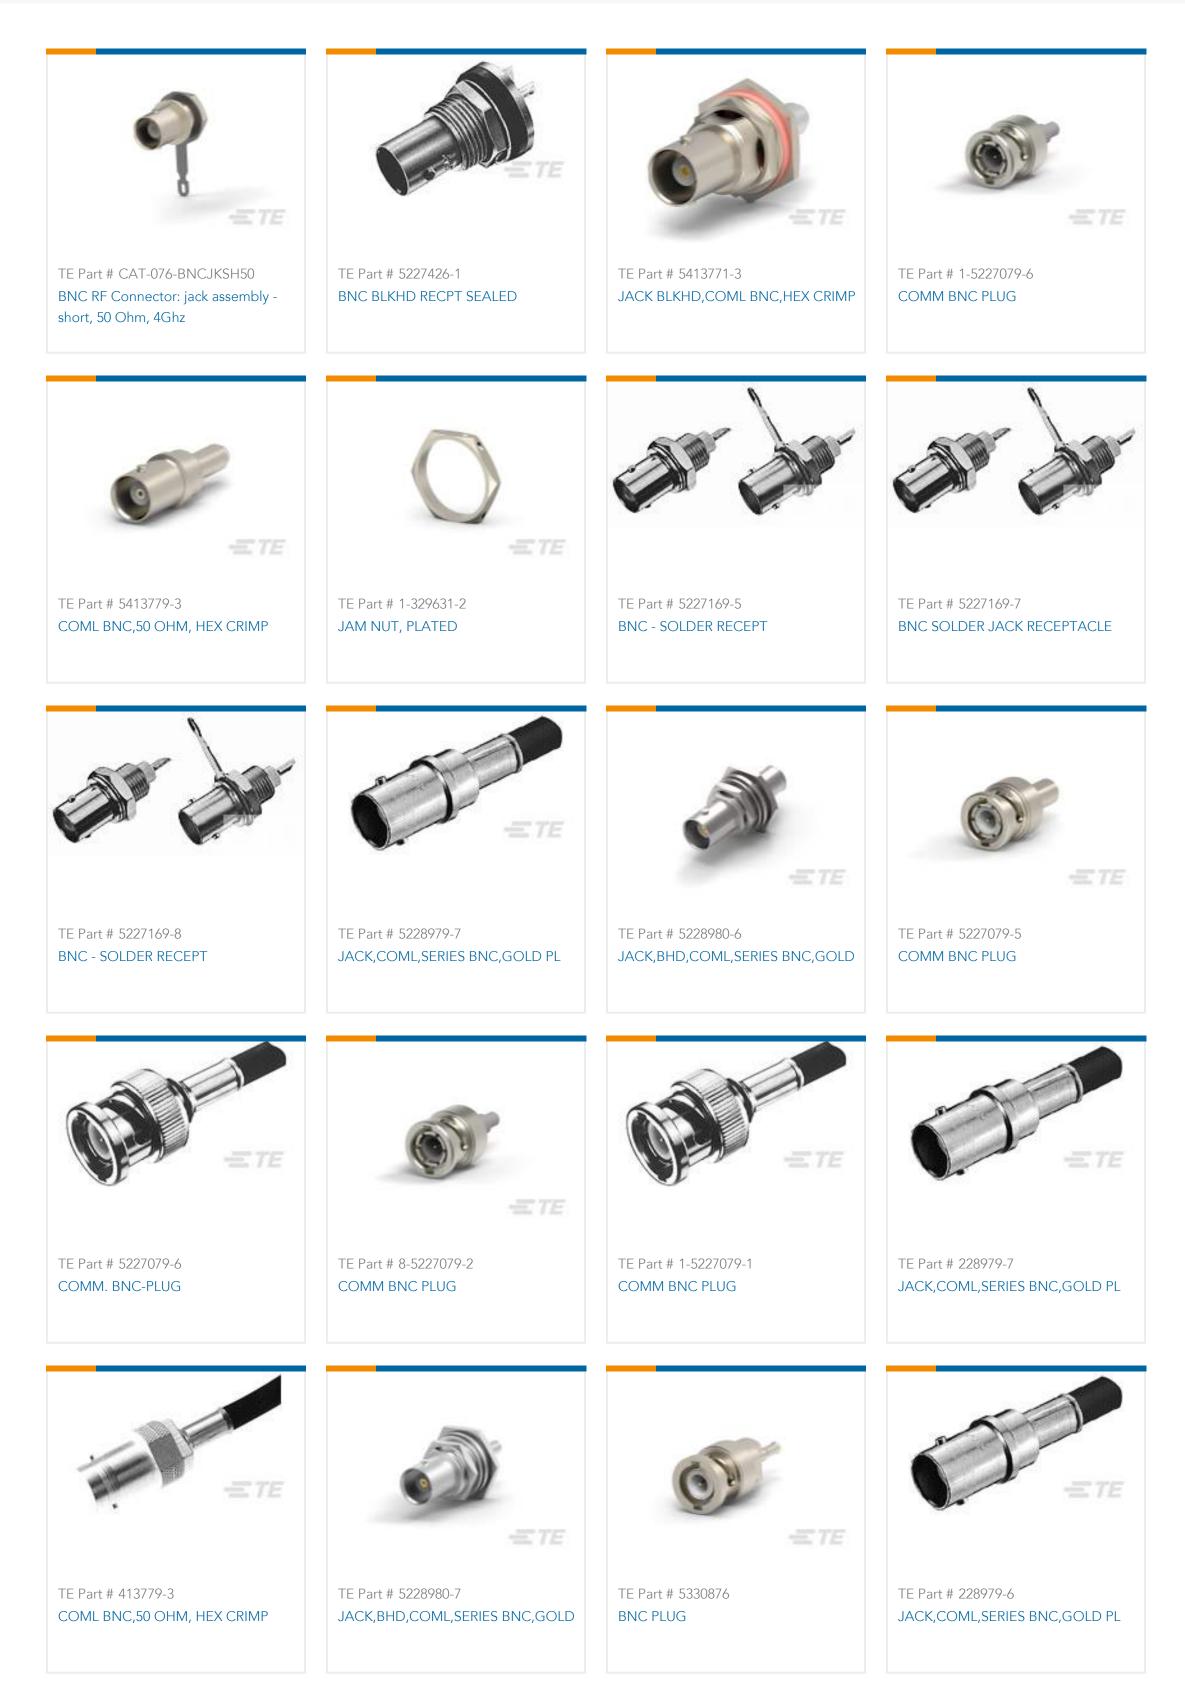

Customers Also Bought

BNC RF Interface, Jack, 50 Ω, Bayonet, 4 GHz Operating Frequency, Cable-to-Board / Cable-to-Panel, 1 Position, Printed Circuit Board, Panel Mount





Documents

Product Drawings VERT JK W/MTG PINS, BNC PCB

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_5227222-6_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5227222-6_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5227222-6_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages BNC Connectors

English

Product Specifications

Product Specification

English

Product Specification

English

BNC RF Interface, Jack, 50 Ω , Bayonet, 4 GHz Operating Frequency, Cable-to-Board / Cable-to-Panel, 1 Position, Printed Circuit Board, Panel Mount



Product Environmental Compliance

MD_5227222-6_07032014856_dmtec

English

MD_5227222-6_07032014856_dmtec

English

Instruction Sheets

Instruction Sheet (U.S.)

English