

LOC AI	DIST 00	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
C		ECR-15-011726	06AUG15	LS	GS	

HT11K HAND TOOL, MCON 050

FRONT VIEW



SIDE VIEW



Eigenschaften / Features

Die Handzange verfügt über eine verschiebbare Crimpmatrize mit insgesamt sechs Crimpnester in denen die Leitungsquerschnitte 0.13, 0.17, 0.22, 0.22 (RF*), 0.35 (FLR) und 0.35 mm² (FLU) verarbeitet werden können. Die Kontakte werden mittels Klapppositionierer in der richtigen Ausgangsposition gehalten.

Hand tool with slideable crimping die set on which six crimping nests cover the wire sizes 0.13, 0.17, 0.22, 0.22 (RF), 0.35 (FLR) and 0.35 sq.mm (FLU). Featured with a flap contact locator to allow correct positionint of the applied terminals.

RF*=Reinforced/Zugverstärkt

Abmessungen / Dimensions:

Länge / Length: 235 mm

Breite / Width: 64 mm


Tiefe/Depth : 31 mm

Anwendungsbereich / Application range

TYPE MCON 0.50

- Application Specification 114-94191

Matrize / Die set:

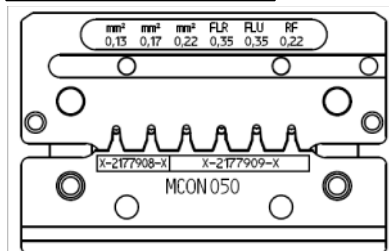

**Betriebsanleitung /
CUSTOMER MANUAL:**
IS 411-18539 / TE PN 6-744015-4



RELEASED FOR PUBLICATION

ALL INTERNATIONAL RIGHTS RESERVED.

BY TYCO ELECTRONICS CORPORATION.

© COPYRIGHT

THIS DRAWING IS UNPUBLISHED.

DIMENSIONS: mm	DWN C. Witt	21N02013	MATERIAL	FINISH
	CHK C. Witt	21N02013	 TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD C. Witt	21N02013		
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	PRODUCT SPEC	APPLICATION SPEC	SIZE
	WEIGHT	0.456kg	CAGE CODE	00779
	CUSTOMER DRAWING		DRAWING NO	4-1579014-1
			RESTRICTED TO	-
			SCALE	SHEET 1 OF 1
			REV	C