

STRADA-2X2-5050-T2-M

IESNA Type II (medium) beam with excellent illuminance uniformity and cutoff. Variant optimized for flat 5050 size LED packages.

SPECIFICATION:

Dimensions	50.0 x 50.0 mm
Height	7.2 mm
Fastening	screw
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish
STRADA-2X2-5050-T2-M	Multi-lens	PMMA	clear	




ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C17141_STRADA-2X2-5050-T2-M » Box size: 480 x 280 x 300 mm	800	160	160	7.8

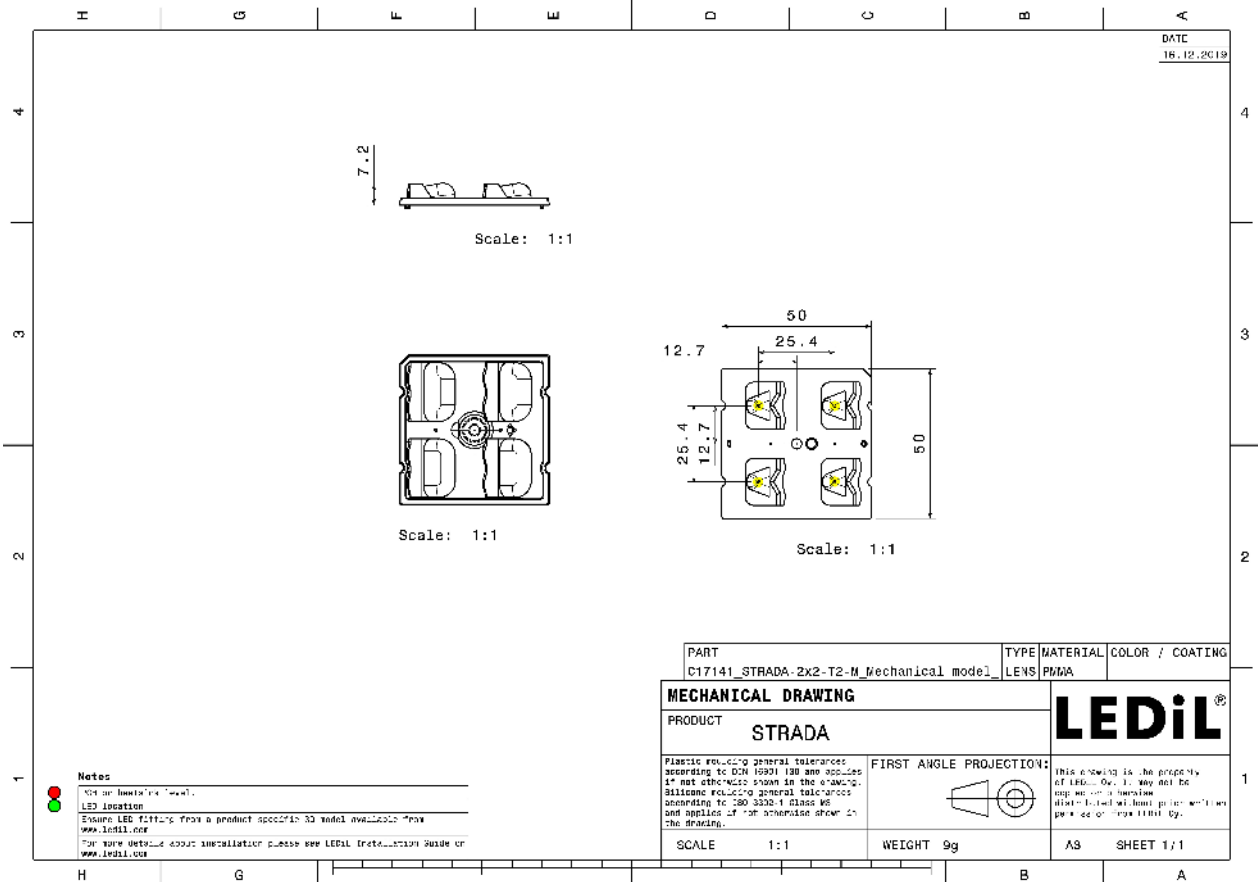

See also our general installation guide: www.ledil.com/installation_guide


OPTICAL RESULTS (MEASURED):
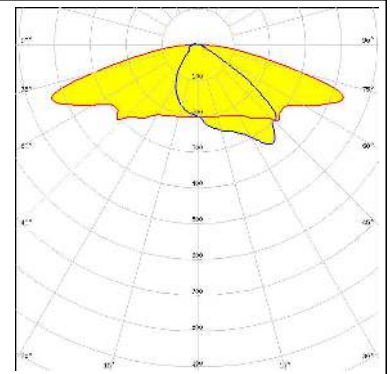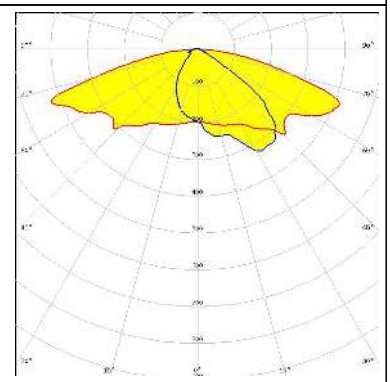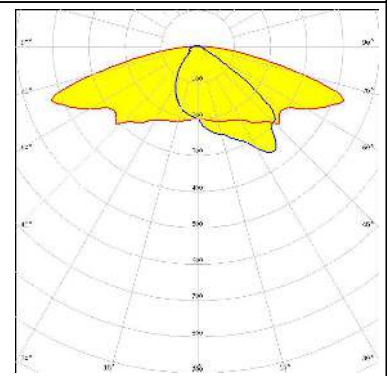
<p>LUMILEDS</p> <p>LED LUXEON XR-5050 SQR (L213-xxxx016MRH001)</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 95 %</p> <p>Peak intensity 0.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>MST <i>Your solutions</i></p> <p>LED RecLED 173x50mm 2900lm 740 2x6 5050 Opt G1</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 96 %</p> <p>Peak intensity 0.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>PHILIPS</p> <p>LED Fortimo FastFlex LED 2x8 DA HE</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 96 %</p> <p>Peak intensity 0.4 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	


OPTICAL RESULTS (SIMULATED):



LED J Series 5050 Round LES
 FWHM / FWTM Asymmetric
 Efficiency 97 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

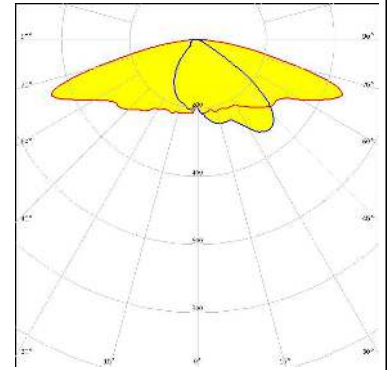


LED J Series 5050 Round LES
 FWHM / FWTM Asymmetric
 Efficiency 92 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

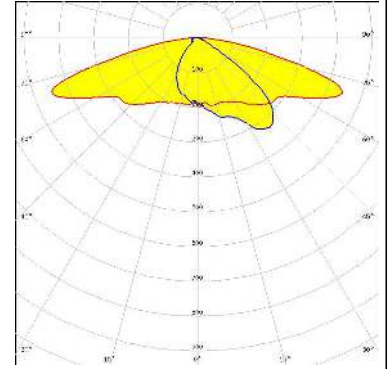


LED J Series 5050 Round LES
 FWHM / FWTM Asymmetric
 Efficiency 84 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Protective plate, glass

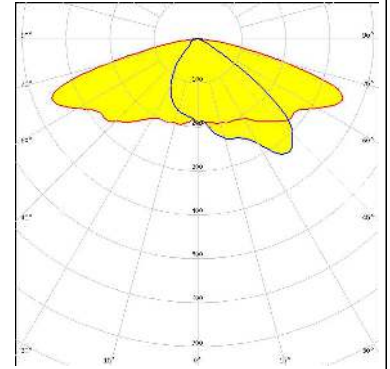


LED J Series 5050 Square LES 6V
 FWHM / FWTM Asymmetric
 Efficiency 92 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

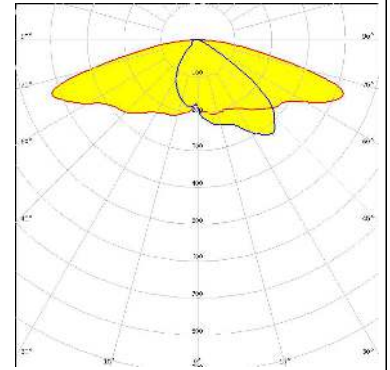

OPTICAL RESULTS (SIMULATED):


CREE LED

LED XP-G2
 FWHM / FWTM Asymmetric
 Efficiency 91 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

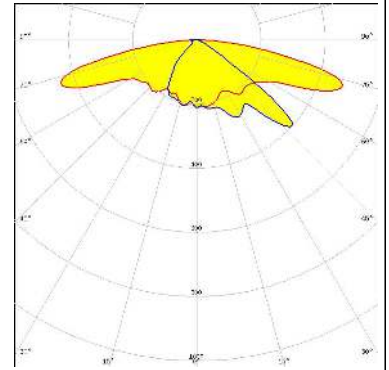


CREE LED

LED XP-G2 HE
 FWHM / FWTM Asymmetric
 Efficiency 90 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

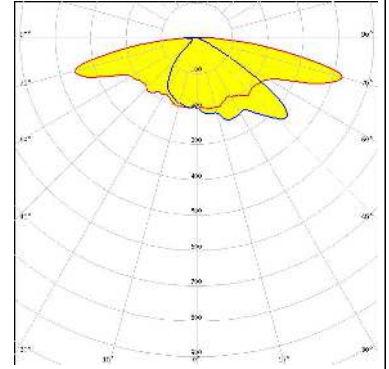

CREE LED


LED XP-G3
 FWHM / FWTM Asymmetric
 Efficiency 87 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

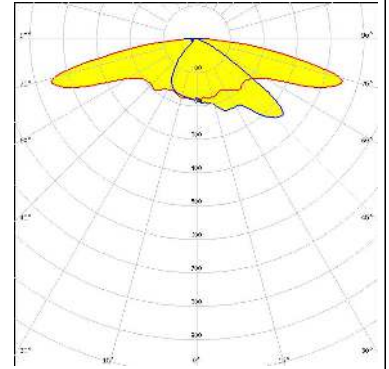

CREE LED

LED XP-G3
 FWHM / FWTM Asymmetric
 Efficiency 82 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Protective plate, glass

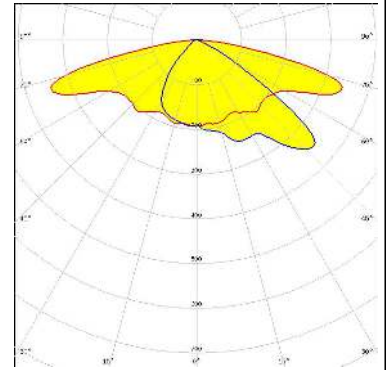


OPTICAL RESULTS (SIMULATED):

LUMILEDS

LED LUXEON 5050 HE
 FWHM / FWTM Asymmetric
 Efficiency 78 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:


Protective plate, glass

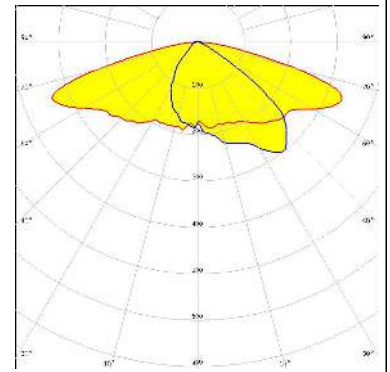

LUMILEDS

LED LUXEON 5050 Round LES
 FWHM / FWTM Asymmetric
 Efficiency 78 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:


Protective plate, glass

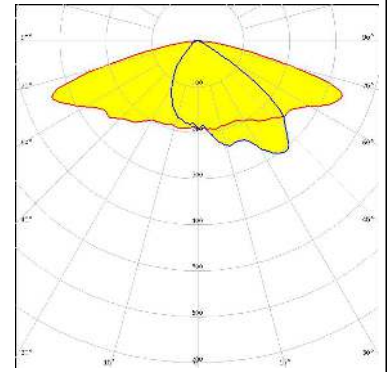

LUMILEDS

LED LUXEON 5050 Square LES
 FWHM / FWTM Asymmetric
 Efficiency 67 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:


C17677_STRADA-2X2-SHD-BLK

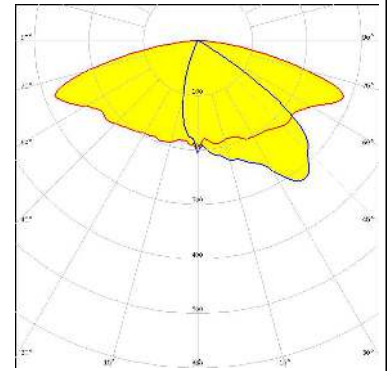

LUMILEDS

LED LUXEON 5050 Square LES
 FWHM / FWTM Asymmetric
 Efficiency 78 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Protective plate, glass

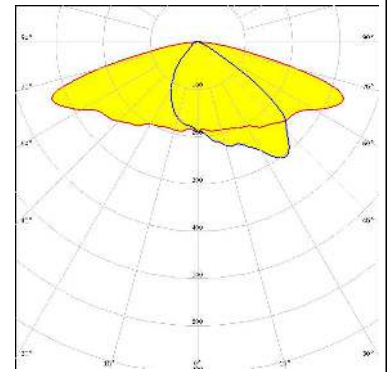


OPTICAL RESULTS (SIMULATED):

LUMILEDS


LED LUXEON 5050 Square LES
 FWHM / FWTM Asymmetric
 Efficiency 58 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C17677_STRADA-2X2-SHD-BLK

Protective plate, glass

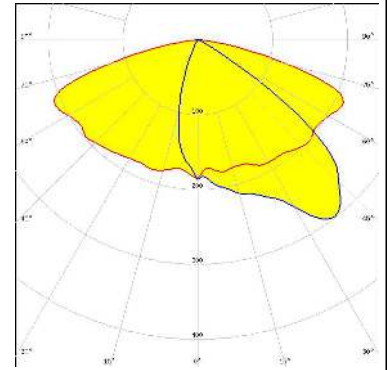

LUMILEDS


LED LUXEON 5050 Square LES
 FWHM / FWTM Asymmetric
 Efficiency 74 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C17580_STRADA-2X2-SHD-WHT

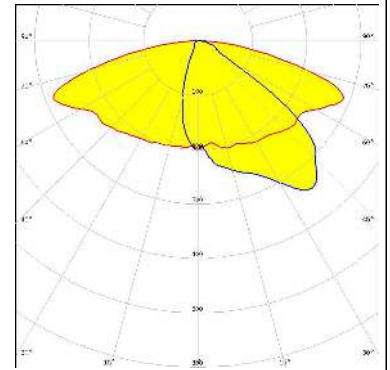

MST Your solutions

LED RecLED 173x50mm 2900lm 740 2x6 5050 Opt G1
 FWHM / FWTM Asymmetric
 Efficiency 82 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:


Protective plate, glass

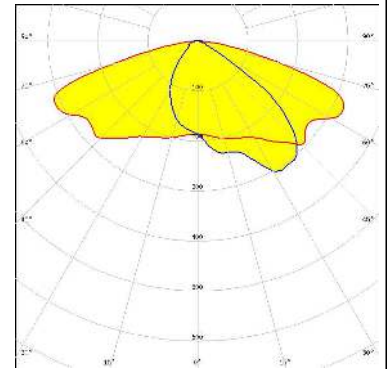





NICHIA

LED NFMW48xA
 FWHM / FWTM Asymmetric
 Efficiency 79 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Protective plate, glass

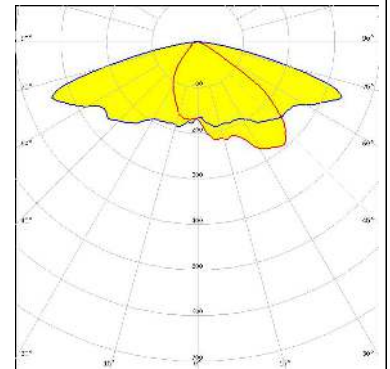

OPTICAL RESULTS (SIMULATED):
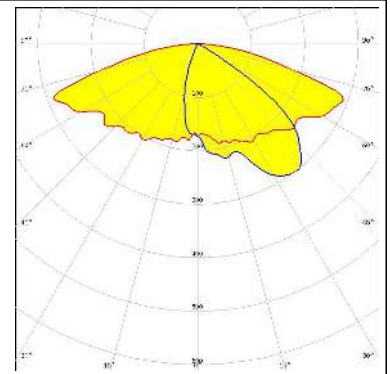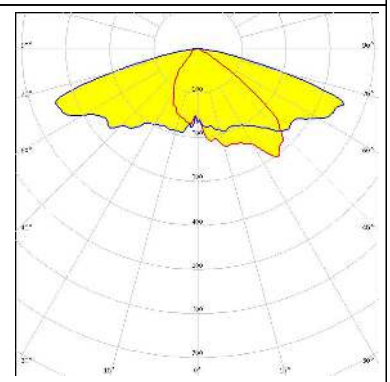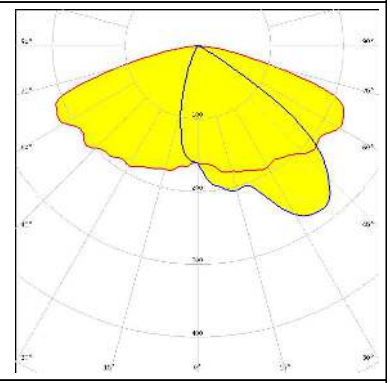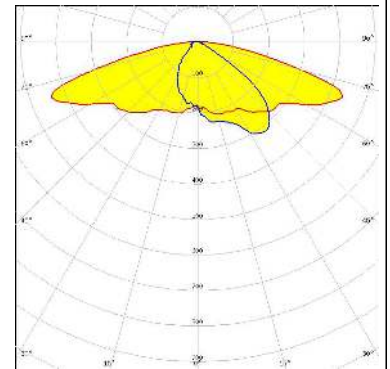
<p>OSRAM Opto Semiconductors</p> <p>LED: Duris S8 FWHM / FWTM: Asymmetric Efficiency: 67 % Peak intensity: 0.3 cd/lm LEDs/each optic: 1 Light colour: White Required components: C17677_STRADA-2X2-SHD-BLK</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED: Duris S8 FWHM / FWTM: Asymmetric Efficiency: 79 % Peak intensity: 0.4 cd/lm LEDs/each optic: 1 Light colour: White Required components: Protective plate, glass</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED: Duris S8 FWHM / FWTM: Asymmetric Efficiency: 59 % Peak intensity: 0.3 cd/lm LEDs/each optic: 1 Light colour: White Required components: C17677_STRADA-2X2-SHD-BLK Protective plate, glass</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED: OSCONIQ S 5050 FWHM / FWTM: Asymmetric Efficiency: 93 % Peak intensity: 0.5 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	


OPTICAL RESULTS (SIMULATED):

OSRAM

Opto Semiconductors

LED OSCONIQ S 5050
 FWHM / FWTM Asymmetric
 Efficiency 80 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Protective plate, glass

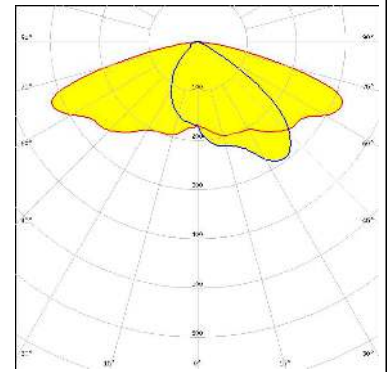


OSRAM

Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3
 Assembly NULL
 FWHM / FWTM Asymmetric
 Efficiency 76 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:


Protective plate, glass

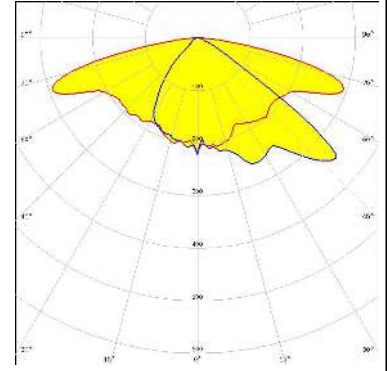

PHILIPS

LED Fortimo FastFlex LED 2x8 DA HE
 FWHM / FWTM Asymmetric
 Efficiency 82 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:


Protective plate, glass

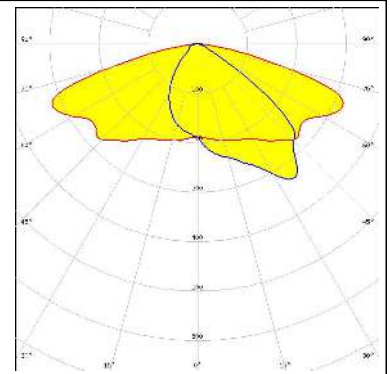

SAMSUNG

LED LH351C
 FWHM / FWTM Asymmetric
 Efficiency 77 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Protective plate, glass

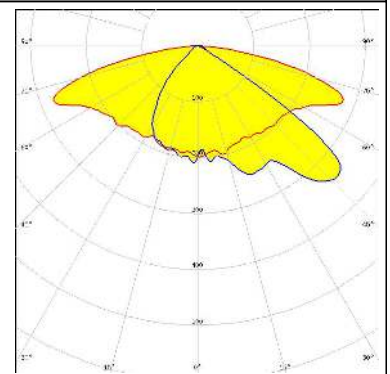


OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED LH502C
 FWHM / FWTM Asymmetric
 Efficiency 79 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Protective plate, glass

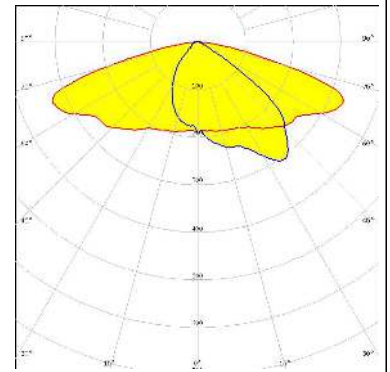

SAMSUNG


LED LH502D
 FWHM / FWTM Asymmetric
 Efficiency 93 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

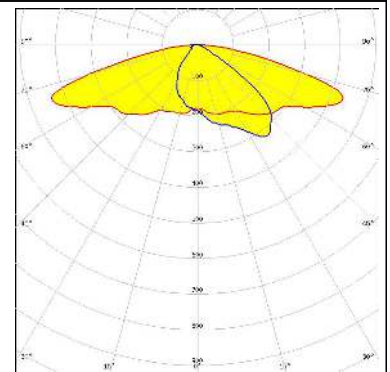

SAMSUNG


LED LH502D
 FWHM / FWTM Asymmetric
 Efficiency 80 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Protective plate, glass

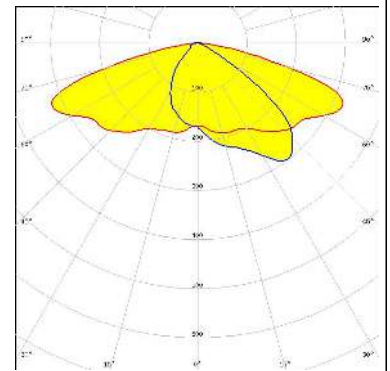
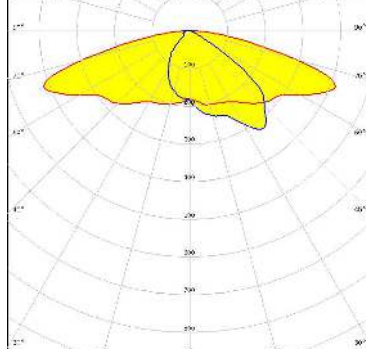

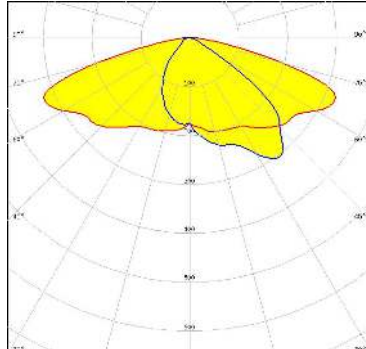


SEOUL SEMICONDUCTOR

LED MJT 5050
 FWHM / FWTM Asymmetric
 Efficiency 89 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

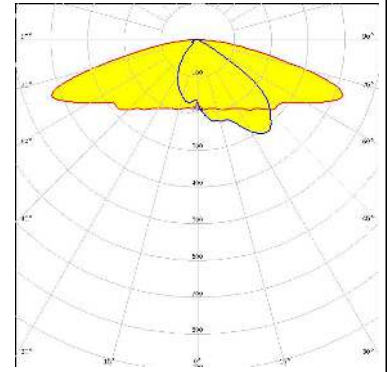

OPTICAL RESULTS (SIMULATED):

<p> SEOUL SEMICONDUCTOR</p> <p>LED: SEOUL DC 5050 6V</p> <p>FWHM / FWTM: Asymmetric</p> <p>Efficiency: 92 %</p> <p>Peak intensity: 0.4 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>	
<p> SEOUL SEMICONDUCTOR</p> <p>LED: SEOUL DC 5050 6V</p> <p>FWHM / FWTM: Asymmetric</p> <p>Efficiency: 82 %</p> <p>Peak intensity: 0.3 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p> <p style="background-color: #ADD8E6; padding: 2px;">Protective plate, glass</p>	

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)