
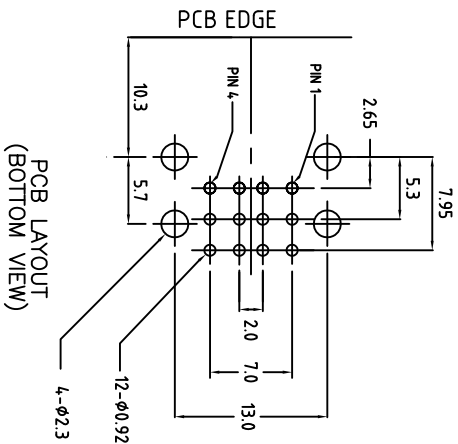


used for:

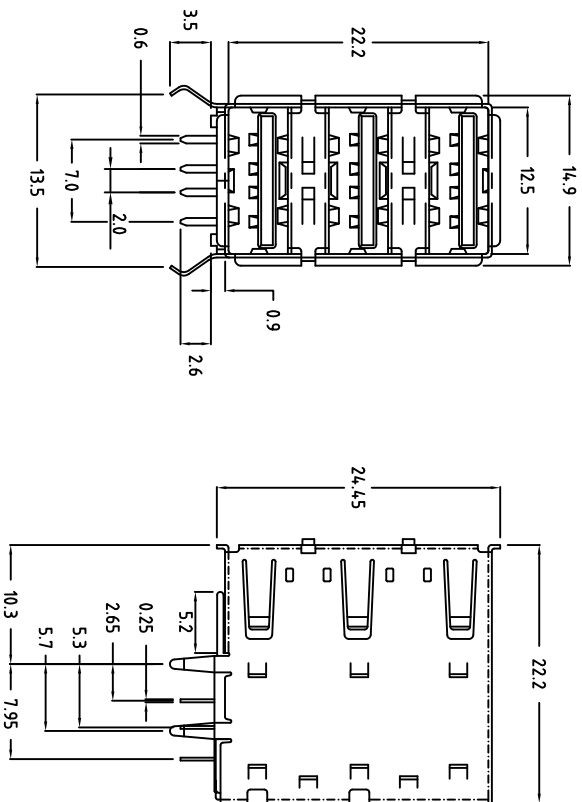

MATERIAL:

INSULATOR : PBT +30% GLASS FIBER (UL 94V-0)
 CONTACT : PHOSPHOR BRONZE
 CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,
 WITH ENTIRE CONTACT NICKEL UNDERPLATED
 SHELL : BRASS, NICKEL PLATED
 @BACK SHELL : STEEL, NICKEL PLATED
 BOTTOM COVER : NYLON, BLACK


SPECIFICATION:

CURRENT RATING : 1.5AMP
 DIELECTRIC WITHSTANDING VOLTAGE : 500V AC
 INSULATION RESISTANCE : 1000MΩ MIN.
 CONTACT RESISTANCE BEFORE : 30mΩ MAX
 CONTACT RESISTANCE AFTER : 50mΩ MAX
 OPERATING TEMPERATURE : -20°C ~ +85°C



THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION.

DO NOT ALTER CAD DRAWING BY HAND		tolerance	finish	scale:
Denote: .xxx	unless otherwise specified tolerance shall be as follow	Angles:	Dim. in mm	material: SEE MATERIAL
rev./description	date	name	draw: date	title: USB Connector A female type
a	1	Oct/25/06	appd: May 09	PCB R/A (Triple)
b	1	Oct/25/06	norm: R. Santangelo	RoHS compliant
origin	1	Oct/25/06	d-old	drawing no.: AutocAD 2005
1	1	Oct/25/06		39K1A243
2				DIN A3
3				sheet 1/1
4				part no.: 33UBAR-TSNIR



8 7 6 5 4 3 2 1