


THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

ELECTRICAL CHARACTERISTICS (@25°C)



SCHEMATIC

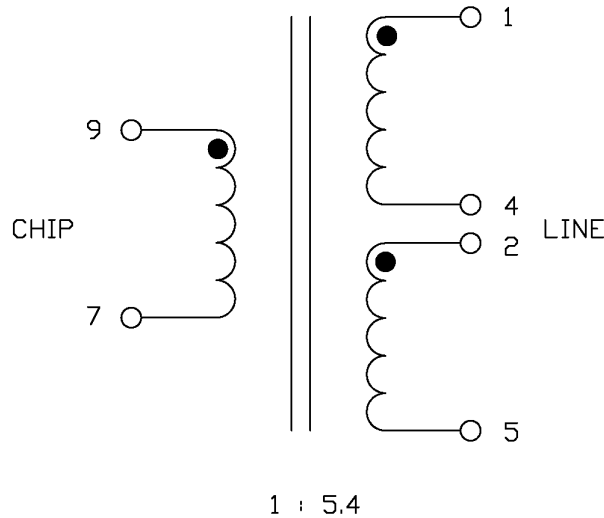

NOMINAL TURNS RATIO:

(9-7) : (1-5)

1 : 5.4

CONNECT TERMINALS 2 TO 4

DC RESISTANCE:

(1-4)

1.48 Ω MAX.

(2-5)

1.48 Ω MAX.

(9-7)

0.35 Ω MAX.

INDUCTANCE @ 10 kHz, 0.1 Vrms:

(1-5)

3 mH ±5%

CONNECT TERMINALS 2 TO 4

LEAKAGE INDUCTANCE:

(1-5)

15 μH MAX.

CONNECT TERMINALS 2 TO 4

SHORT TERMINALS 7 & 9

MINIMUM DIELECTRIC RATING:

BETWEEN (1-5) & (9-7)

1500 Vrms

CONNECT TERMINALS 2 TO 4

BETWEEN (1-4) & (2-5)

600 Vrms

THIRD HARMONIC DISTORTION:

AT 15kHz AND FUNDAMENTAL 5kHz)

APPROXIMATE 2 Vrms @ 5kHz ACROSS LINE (1-5)

WITH R_s = 135Ω AND R_{LOAD} = 4.6Ω AT CHIP SIDE (9-7)

OPERATING TEMPERATURE RANGE:

-40°C TO +85°C

DESIGNED TO COMPLY WITH THE REQUIREMENTS OF UL1950 AND EN60950

SAFETY AGENCY

UL FILE

E150991

BABT FILE

NC/011272

INSERTION LOSS 0.7 dB MAX. @ 100kHz

FREQUENCY RESPONSE ±0.3dB MAX.
40kHz-300kHz, 100kHz REFERENCE

LONGITUDINAL BALANCE: -50 dB MAX.
20kHz TO 300kHz PER ITU METHOD (L->M)





ORIGINATED BY	DATE	TITLE	PART NO. / DRAWING NO.	STANDARD DIM. TOL. IN INCH	[] METRIC DIM. AS REFERENCE
KOT	11-29-05	ELECTRICAL SPECIFICATION	S5606600N7-F	.X	UNIT : INCH [mm] REV. : B
DRAWN BY	DATE		FILE NAME	.XX	SCALE : N/A SIZE : A4
XJ WAGN	11-29-05		S5606600N7FB.DWG	.XXX	SCALE : N/A SIZE : A4
					PAGE : 2



THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.





SUGGESTED PAD LAYOUT

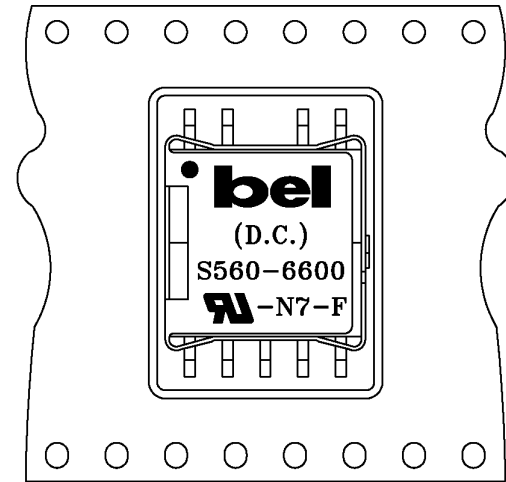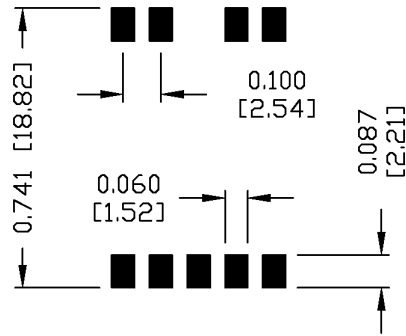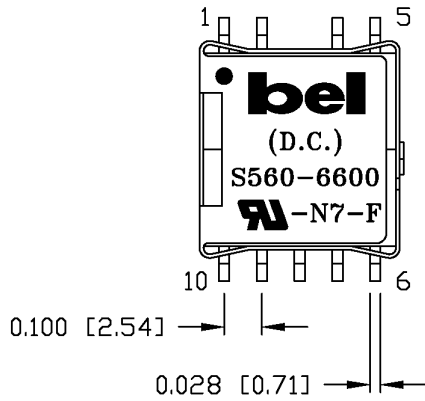

USER FEED DIRECTION

ORIENTATION OF COMPONENT INSIDE POCKET

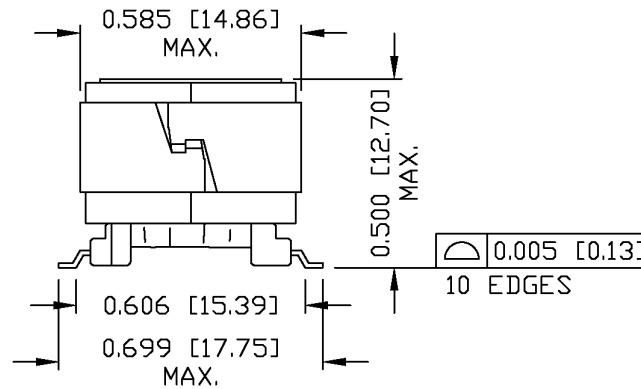

NOTES:

1. STANDARD MARKING REFER TO DOC. HAND-WORK-04.
2. PACKAGE CODE: "WCS003".

TAPE WIDTH	32MM
POCKET PITCH	24MM
QUANTITY OF COMPONENTS PER REEL	200
PLASTIC REEL OUTER DIAMETER	13 INCHES
PLASTIC REEL HUB DIAMETER	4 INCHES
COMPLY WITH EIA 481-2-A	

ORIGINATED BY	DATE	TITLE	PART NO. / DRAWING NO.	STANDARD DIM. TOL. IN INCH	[] METRIC DIM. AS REFERENCE
MAN CHAN	11-29-05	MECHANICAL DRAWING	S5606600N7-F	.X	UNIT : INCH [mm] REV. : B
DRAWN BY	DATE		FILE NAME	.XX ±0.01	SCALE : N/A SIZE : A4
MAN CHAN	11-29-05		S5606600N7FB.DWG	.XXX ±0.005	⊕ ← PAGE : 3

