

## PCB - PTF 0,3/ 4-FLEX-I-10 - 1848503

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Accessories, Number of positions: 4, Pitch: 2.4 mm, Mounting: PCB connector



### Why buy this product

- Extension for implementing complex arrangements of flexible LED printed-circuit boards
- Easy connection of flexible LED printed-circuit boards
- Minimal heating during operation
- UL-approved materials

### Key Commercial Data

|                                      |             |
|--------------------------------------|-------------|
| Packing unit                         | 1 STK       |
| Minimum order quantity               | 20 STK      |
| Weight per Piece (excluding packing) | 0.500 g     |
| Custom tariff number                 | 85340019    |
| Country of origin                    | Netherlands |

### Technical data


#### Environmental Product Compliance

|            |  |
|------------|--|
| China RoHS | No hazardous substances above threshold values |
|------------|--|

### Drawings

# PCB - PTF 0,3/ 4-FLEX-I-10 - 1848503

Dimensional drawing

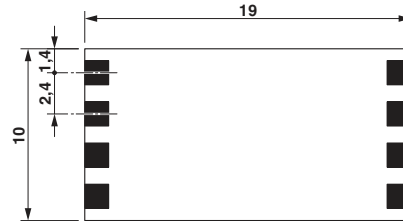

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 5.1 | 27141190 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 8.0 | 27440402 |
| eCl@ss 9.0 | 27440402 |

### ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC002643 |
| ETIM 5.0 | EC002637 |

## Accessories

### Additional products

Printed-circuit board connector - PTF 0,3/ 2-WB-10-H - 1707562



Plug component, Nominal current: 10 A, Rated voltage (III/2): 24 V, Number of positions: 2, Pitch: 2.4 mm, Color: white, Contact surface: Tin, Mounting: Direct plug-in method, Length of the punched-on cables: 500 mm, for flexible PCBs with a width of 10 mm and a permissible PCB thickness in the contact zone of 0.15 mm ... 0.3 mm

Printed-circuit board connector - PTF 0,3/ 4-BB-10-H - 1707563



Plug component, Nominal current: 10 A, Rated voltage (III/2): 24 V, Number of positions: 4, Pitch: 2.4 mm, Color: white, Contact surface: Tin, Mounting: Direct plug-in method, for flexible PCBs with a width of 10 mm and a permissible PCB thickness in the contact zone of 0.15 mm ... 0.3 mm

## PCB - PTF 0,3/ 4-FLEX-I-10 - 1848503

### Accessories

Printed-circuit board connector - PTF 0,3/ 4-WB-10-H - 1707565



Plug component, Nominal current: 10 A, Rated voltage (III/2): 24 V, Number of positions: 4, Pitch: 2.4 mm, Color: white, Contact surface: Tin, Mounting: Direct plug-in method, Length of the punched-on cables: 500 mm, for flexible PCBs with a width of 10 mm and a permissible PCB thickness in the contact zone of 0.15 mm ... 0.3 mm