

# Wide Temperature, 2.7V Radial Supercapacitor



ADCR-T02R7S

Request Samples



Check Inventory



Various Sizes

RoHS/RoHS II Compliant

MSL Level = 1

## Features

- Extended Temperature Series
- High power density
- Minimal discharge rate, 72 hours @ discharge < 20%
- Excellent cycle life
- Green, meet RoHS requirements

## Applications

- Power Assist Circuits
- Power Backup
- Micro Energy Storage
- IoT Energy Harvesting
- SSD applications
- DDR power back up
- RTC System power transfer to battery backup

## Electrical Specifications

Part Number	Nominal Voltage (U <sub>R</sub> )	Capacitance	Tol.	ESR (Max)	Nominal Current	Peak Current (Max)	Leakage Current	Stored Energy (Max)	Gravimetric Energy Density	Power Density	Volumetric Energy Density
ADCR-T02R7S	DC(V)	Farads	±%	mΩ	A	A	mA	mWh	Wh/kg	kW/kg	Wh/L
ADCR-T02R7SA504MB	2.7V	0.5	20	500	0.13	0.54	0.008	0.51	1.13	4.05	1.31
ADCR-T02R7SA105MB	2.7V	1	20	350	0.25	1.00	0.008	1.01	1.14	2.93	1.55
ADCR-T02R7SA205MB	2.7V	2	20	180	0.50	1.99	0.012	2.03	1.67	4.18	2.52
ADCR-T02R7SB205MB	2.7V	2	20	260	0.49	1.78	0.013	2.03	1.81	3.13	2.02
ADCR-T02R7SA305MB	2.7V	3	20	120	0.76	2.98	0.013	3.04	2.27	5.67	3.02
ADCR-T02R7SA335MB	2.7V	3.3	20	120	0.83	3.19	0.015	3.34	1.45	3.29	3.32
ADCR-T02R7SA505MB	2.7V	5	20	80	1.25	4.82	0.016	5.06	3.54	6.97	4.19
ADCR-T02R7SA605MB	2.7V	6	20	75	1.25	4.91	0.016	6.08	3.51	7.02	3.87
ADCR-T02R7SA705MB	2.7V	7	20	70	1.72	6.34	0.028	7.09	3.83	7.04	4.51
ADCR-T02R7SA106MB	2.7V	10	20	65	2.39	8.18	0.030	20.25	5.77	5.77	10.31
ADCR-T02R7SA256MB	2.7V	25	20	30	5.87	19.29	0.070	25.31	4.30	5.16	5.04

**Operating Temperature:** -40°C to +85°C

**Storage:** Temperature -30°C to +50°C, RH < 60%, Max. Humidity < 85% RH

**Test Conditions:** +25°C

All parameters are measured according to the IEC 62391-1 standard.

Capacitance and ESR are measured with  $I(mA) = 8(C * U_R)$

**Nominal Current:** 5 Seconds to discharge from U<sub>R</sub> to 1/2U<sub>R</sub>

**Peak Current (Max.):** 1 second to discharge to U<sub>R</sub> to 1/2U<sub>R</sub>

**Leakage Current:** Measured after 72h at U<sub>R</sub>



5101 Hidden Creek Ln, Spicewood TX 78669  
Phone: 512-371-6159 Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
www.abracon.com

REVISION Initial Release :  
3/30/2023

ABRACON IS  
ISO9001-2015  
CERTIFIED

# Wide Temperature, 2.7V Radial Supercapacitor



**ADCR-T02R7S**

Request Samples



Check Inventory




Various Sizes

RoHS/RoHS II Compliant

MSL Level = 1

## Mechanical Specifications

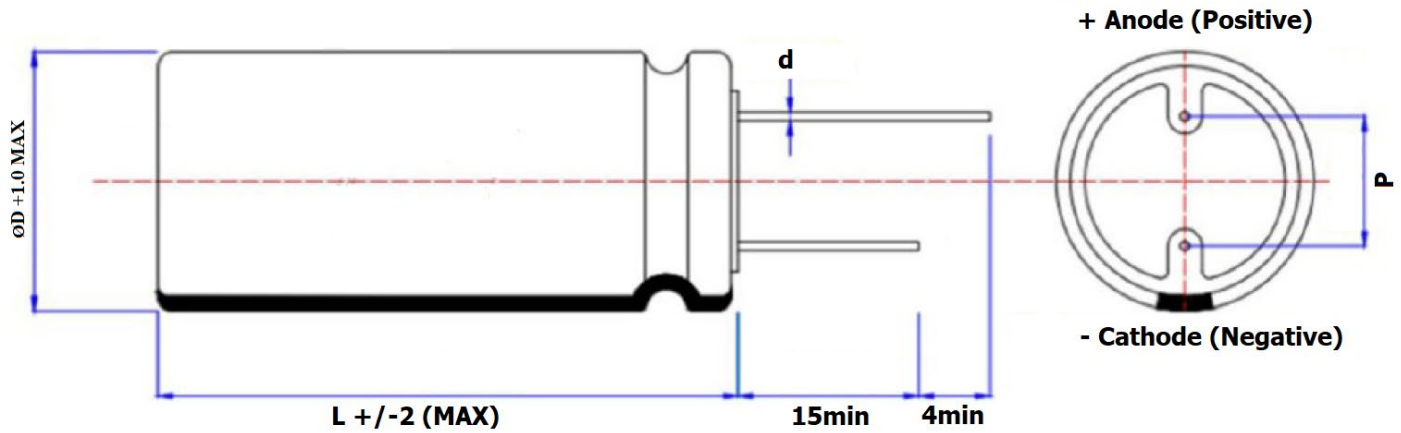

Dimensions	D	L	P	d
ADCR-T02R7SA504MB	$6.3 \pm 1.0$	$12.5 \pm 1.0$	$2.5 \pm 0.5$	$0.5 \pm 0.05$
ADCR-T02R7SA105MB	$8.0 \pm 1.0$	$13.0 \pm 1.0$	$3.5 \pm 0.5$	$0.6 \pm 0.05$
ADCR-T02R7SA205MB	$8.0 \pm 1.0$	$16.0 \pm 1.5$	$3.5 \pm 0.5$	$0.6 \pm 0.05$
ADCR-T02R7SB205MB	$8.0 \pm 1.0$	$20.0 \pm 1.0$	$3.5 \pm 0.5$	$0.6 \pm 0.05$
ADCR-T02R7SA305MB	$8.0 \pm 1.0$	$20.0 \pm 1.0$	$3.5 \pm 0.5$	$0.6 \pm 0.05$
ADCR-T02R7SA335MB	$8.0 \pm 1.0$	$20.0 \pm 1.0$	$3.5 \pm 0.5$	$0.6 \pm 0.05$
ADCR-T02R7SA505MB	$8.0 \pm 1.0$	$24.0 \pm 1.0$	$3.5 \pm 0.5$	$0.6 \pm 0.05$
ADCR-T02R7SA605MB	$10.0 \pm 1.0$	$20.0 \pm 1.0$	$5.0 \pm 0.5$	$0.6 \pm 0.05$
ADCR-T02R7SA705MB	$10.0 \pm 1.0$	$20.0 \pm 1.0$	$5.0 \pm 0.5$	$0.6 \pm 0.05$
ADCR-T02R7SA106MB	$10.0 \pm 1.0$	$25.0 \pm 1.0$	$5.0 \pm 0.5$	$0.6 \pm 0.05$
ADCR-T02R7SA256MB	$16.0 \pm 0.5$	$25.0 \pm 2.0$	$7.5 \pm 0.5$	$0.8 \pm 0.05$

**Dimensions: mm**



5101 Hidden Creek Ln, Spicewood TX 78669  
 Phone: 512-371-6159 Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

**REVISION Initial Release :**  
**3/30/2023**

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

# Wide Temperature, 2.7V Radial Supercapacitor



**ADCR-T02R7S**

Request Samples



Check Inventory




Various Sizes

RoHS/RoHS II Compliant


MSL Level = 1

## Part Number Identification

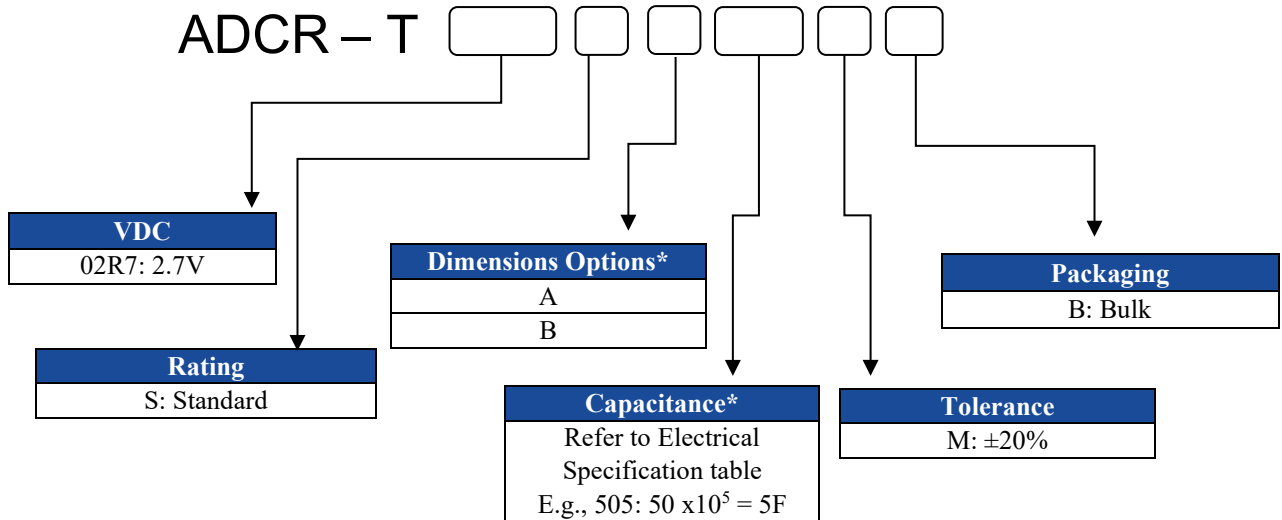

\*Only part numbers listed in the Electrical Specs table are available. For custom builds, please contact us.

## Part Marking

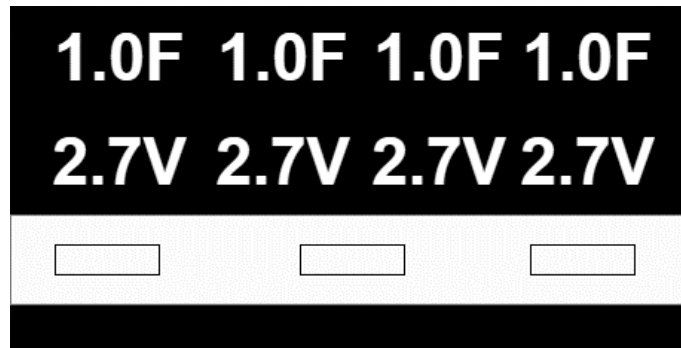

Example of the Markings of a 1.0F 2.7V capacitor

Capacitance (F)

Rated Voltage (V)

Polarity (negative bar on the sleeve to indicate the cathode)



5101 Hidden Creek Ln, Spicewood TX 78669  
 Phone: 512-371-6159 Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

**REVISION Initial Release :**  
 3/30/2023

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

# Wide Temperature, 2.7V Radial Supercapacitor



ADCR-T02R7S

Request Samples



Check Inventory




Various Sizes

RoHS/RoHS II Compliant

MSL Level = 1

## Reflow Profile

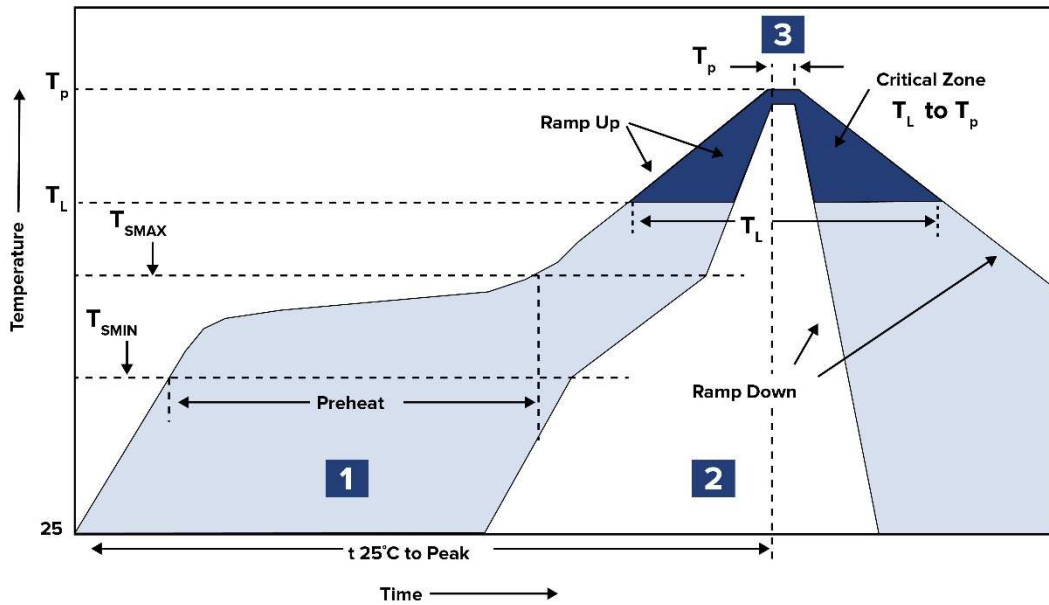

Zone	Description	Temperature	Times
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ 100°C ~ 150°C	60 ~ 120 sec.
2	Reflow	$T_L$ 200°C	30 ~ 40 sec.
3	Peak heat	$T_p$ 240°C±5°C	5 sec. MAX

# Wide Temperature, 2.7V Radial Supercapacitor



**ADCR-T02R7S**

Request Samples



Check Inventory



Various Sizes

RoHS/RoHS II Compliant

MSL Level = 1

## Packaging

Part Number	Quantity (PCS/bag)
ADCR-T02R7SA504MB	2000
ADCR-T02R7SA105MB	1500
ADCR-T02R7SA205MB	1000
ADCR-T02R7SB205MB	1000
ADCR-T02R7SA305MB	1000
ADCR-T02R7SA335MB	1000
ADCR-T02R7SA505MB	1000
ADCR-T02R7SA605MB	800
ADCR-T02R7SA705MB	800
ADCR-T02R7SA106MB	600
ADCR-T02R7SA256MB	250

**ATTENTION:** Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln, Spicewood TX 78669  
Phone: 512-371-6159 Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

**REVISION Initial Release :**  
**3/30/2023**

ABRACON IS  
ISO9001-2015  
CERTIFIED