



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rec.	Rec. Date	Modified By	Brief Description

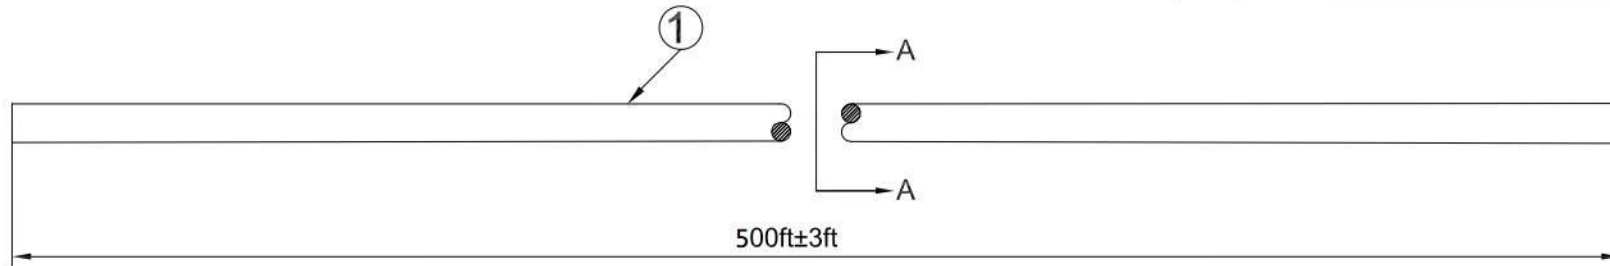

MARING:Cat.8 S/FTP 40G BASE-T 2000MHz 4 PAIRS PVC AWG23 4FT 8FT 12FT 16F.... 500FT

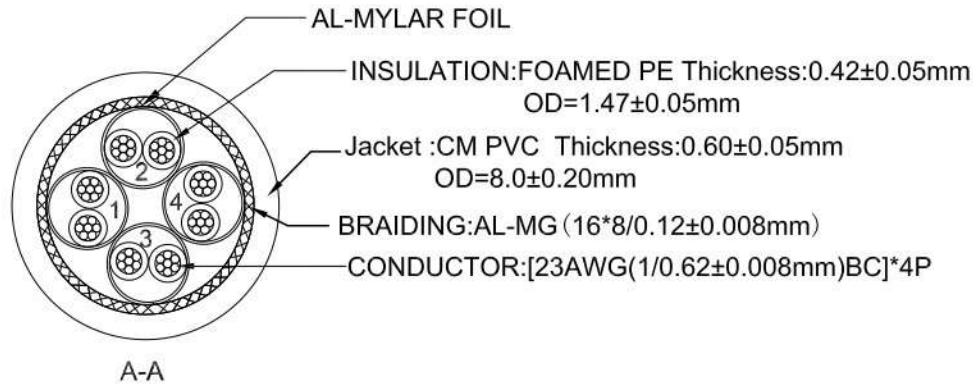

1.Physical Characteristic

- ◆ Temperature Rating: 75°C
- ◆ Voltage rating: 300V AC
- ◆ Elongation at conductors: ≥10%
- ◆ Elongation at insulation: ≥300%
- ◆ Tensile strength of insulation: ≥16.5MPa
- ◆ Elongation at jacket: ≥100%
- ◆ Tensile strength of jacket: ≥10.3MPa

2.Electrical Characteristics

- ◆ Conductor DC resistance: 73.2Ω/KM @ 20°C
- ◆ DC Resistance Unbalance: ≤5%
- ◆ Insulation resistance: ≥500MΩ/100m
- ◆ Dielectric Test: 500V DC/1min; No Breakdown



US SELLER
Fast Shipping From USA

orange 1	green 2
white/orange	white/orange
blue 3	brown 4
white/blue	white/brown


COMPUABLEPLUS
PROVIDING CONNECTIVITY SOLUTIONS

DRAWN BY LCJ	DATE: 2019/12/30	DESCRIPTION: S/FTP Cat8 23AWG Solid bulk cable
CHECKED BY MTC	SHEET 1 of 1	ITEM NO. 80SFP800162FB---91230152
APPROVED BY	SCALE 1:1	REC. 00 UNIT: mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①	CABLE	CAT8 S/FTP 4P/23AWG(1/0.62±0.008MM BC) OD=8.0±0.20mm		

NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rec.	Rec. Date	Modified By	Brief Description

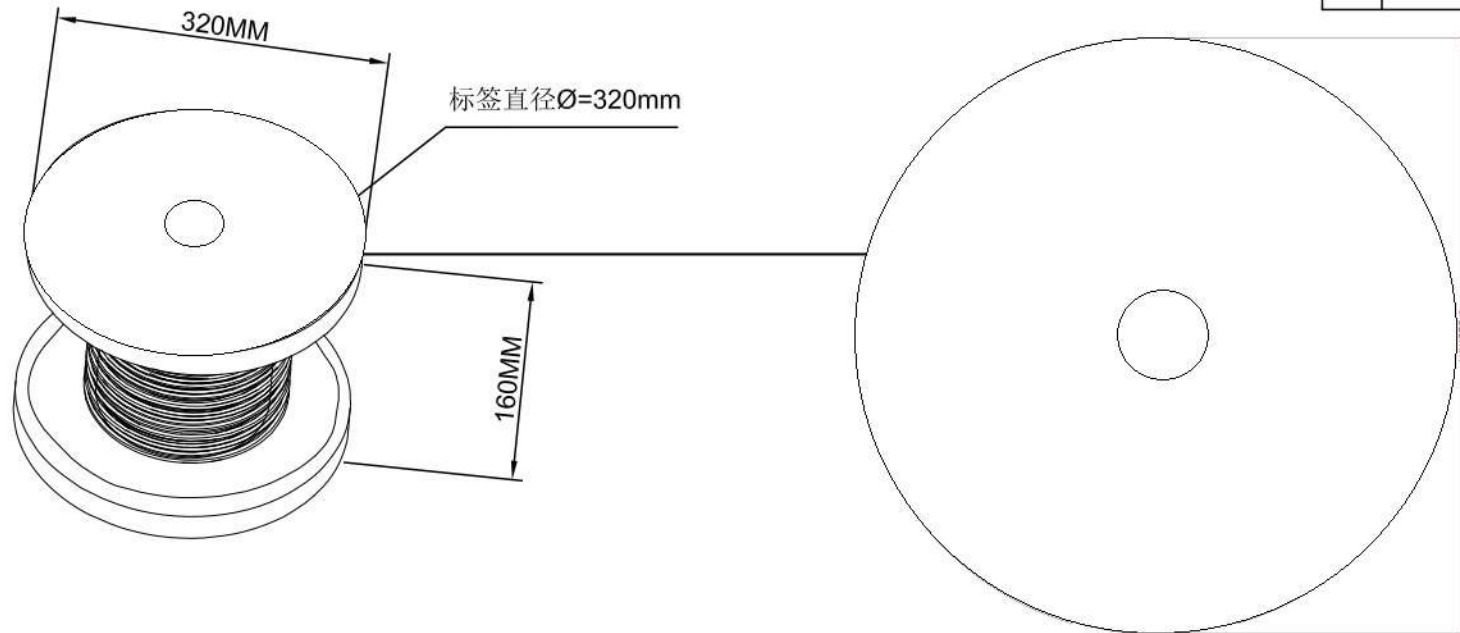

US SELLER
Fast Shipping From USA

Main Mark

Side Mark

<p>P/O: P/N: Q'TY: C/NO.:</p> <p>MADE IN CHINA</p>	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 5px;"> </div> <div style="border: 1px solid black; padding: 5px;"> </div> <div style="border: 1px solid black; padding: 5px;"> <p>RoHS Compliant</p> </div> </div> <p>P/N: Q'TY: PCS N.W.: KGS G.W.: KGS Date Code: Vender Code: PS01455</p>	<p>23cm</p>
33cm	33cm	

PART NO.	LENGTH/FT	G.W(LBS)
L8S23-500BLU-MF	500	XXXX

 COMPUCABLE PLUS PROVIDING CONNECTIVITY SOLUTIONS			
DRAWN BY LCJ	DATE: 2019/12/30	DESCRIPTION: S/FTP Cat8 23AWG Solid bulk cable	
CHECKED BY MTC	SHEET 1 of 1	ITEM NO. 80SFP800162FB---91230152	
APPROVED BY	SCALE 1:1	REC. 00	UNIT: mm