
Ŧ	D	г п	m		0
				_	





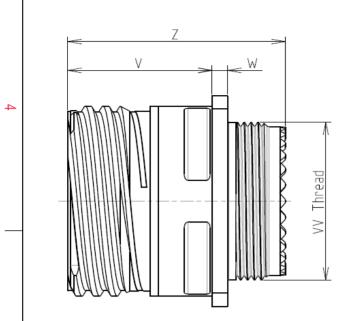

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Without Plating
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	: -65℃ to +175℃

: 2000 hours

: 13.3 g ± 10%

8D 0

G

11

Х

01

S


F

Ν

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
PP	4.93±0.2				
R1	20.62				
R2	18.26				
S	26.2±0.3				
V	20.83+0/-1.25				
W	2.1/2.5				
Z	31.5 Max				
VV THREAD	M15x1-6g				

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

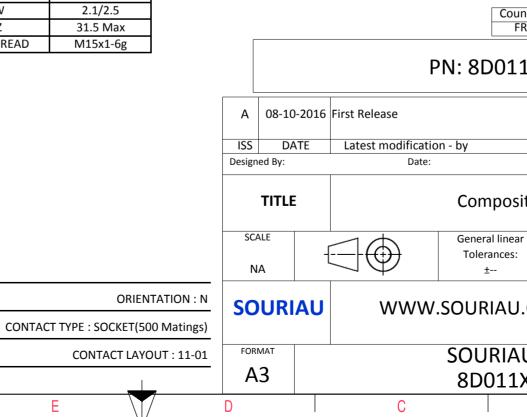

	Φ			A			
							4
							3
	MPLE]		0
any non-conformity or damage which does not comply with or of the Parties or by a third party dation, technical notice.)							
Intry R	Jurisd	liction & Not Li	Control Li sted	st			2
1X01SN							-
		CUST	OMER DRA	WING	N	10D N°	
ite l	ite Receptacle 8D series						
ar		NPI	RDS / PRO. 859	IECT			
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						1	
U DRG N°						SHEET	
X01	1SN-C B			A		1/2	J
	D		I	A			

		۵	н П	m		0
		Contact Layout				Panel Cutout
4		01			\$	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 1#12 11-01 X Y]		* ~	
ى	A	0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
22						Country FR PN: 8D011X
					A 08-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					TITLE SCALE NA	Composite General linear Tolerances: ±
					FORMAT A3	SOURIAU
l	Н	G	F	E	D	8D011X0

