



PC card drilling dimensions(after plating)  
(thickness 1.60±0.20mm)

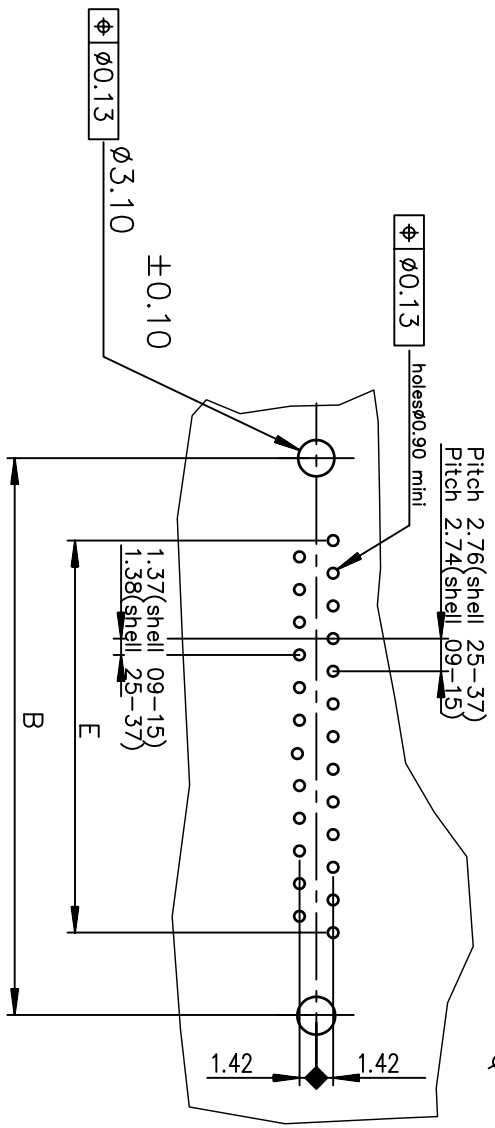

SECTION TERMINAISON CONTACT

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.PV00
15	39.14	33.32	25.18	25.12	19.18	D15P24A.PV00
25	53.03	47.04	39.12	38.84	33.12	D25P24A.PV00
37	69.32	63.50	55.68	55.30	49.68	D37P24A.PV00

Plating: 4 ---> flash AU  
Plating: 6 ---> 0.76» AU

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.PV00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24A.PV00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24A.PV00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24A.PV00LF

Plating: 4 ---> flash AU  
Plating: 6 ---> 0.76» AU

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0000

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED		ANGULAR	0.X	LINEAR	0.XX	size	A3
Product family		0.XX	±2	0.XXX	±0.1	Scale	2
D-SUB		Product ref	-	ECN	109-0268		

rev	ecn no	dr	date
C	-	JAR	2002/09/10
D	LS05-001	MPE	2005/03/09
E	LS05-0056	MPE	2005/06/27
F	LS06-0097	LGO	2006/07/29
G	109-0268	NG	2009-11-24

**FCI** MALE CONNECTOR DELTA D ST  
straight,solder type for

CUSTOMER sheet 1 of 1

Rev. G

C01-8646-0098