


PC BOARD LAYOUT
RECOMMENDED PC BOARD THICKNESS 1.57[.062]

- ① HOUSING MATERIAL: GLASS-FILLED POLYMER.
- ② POST MATERIAL: COPPER ALLOY.
- ③ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- ④ MARKING ON THIS SIDE.
- ⑤ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- ⑥ [PART NUMBER, DATE CODE] MARKED THIS APPROXIMATE AREA.

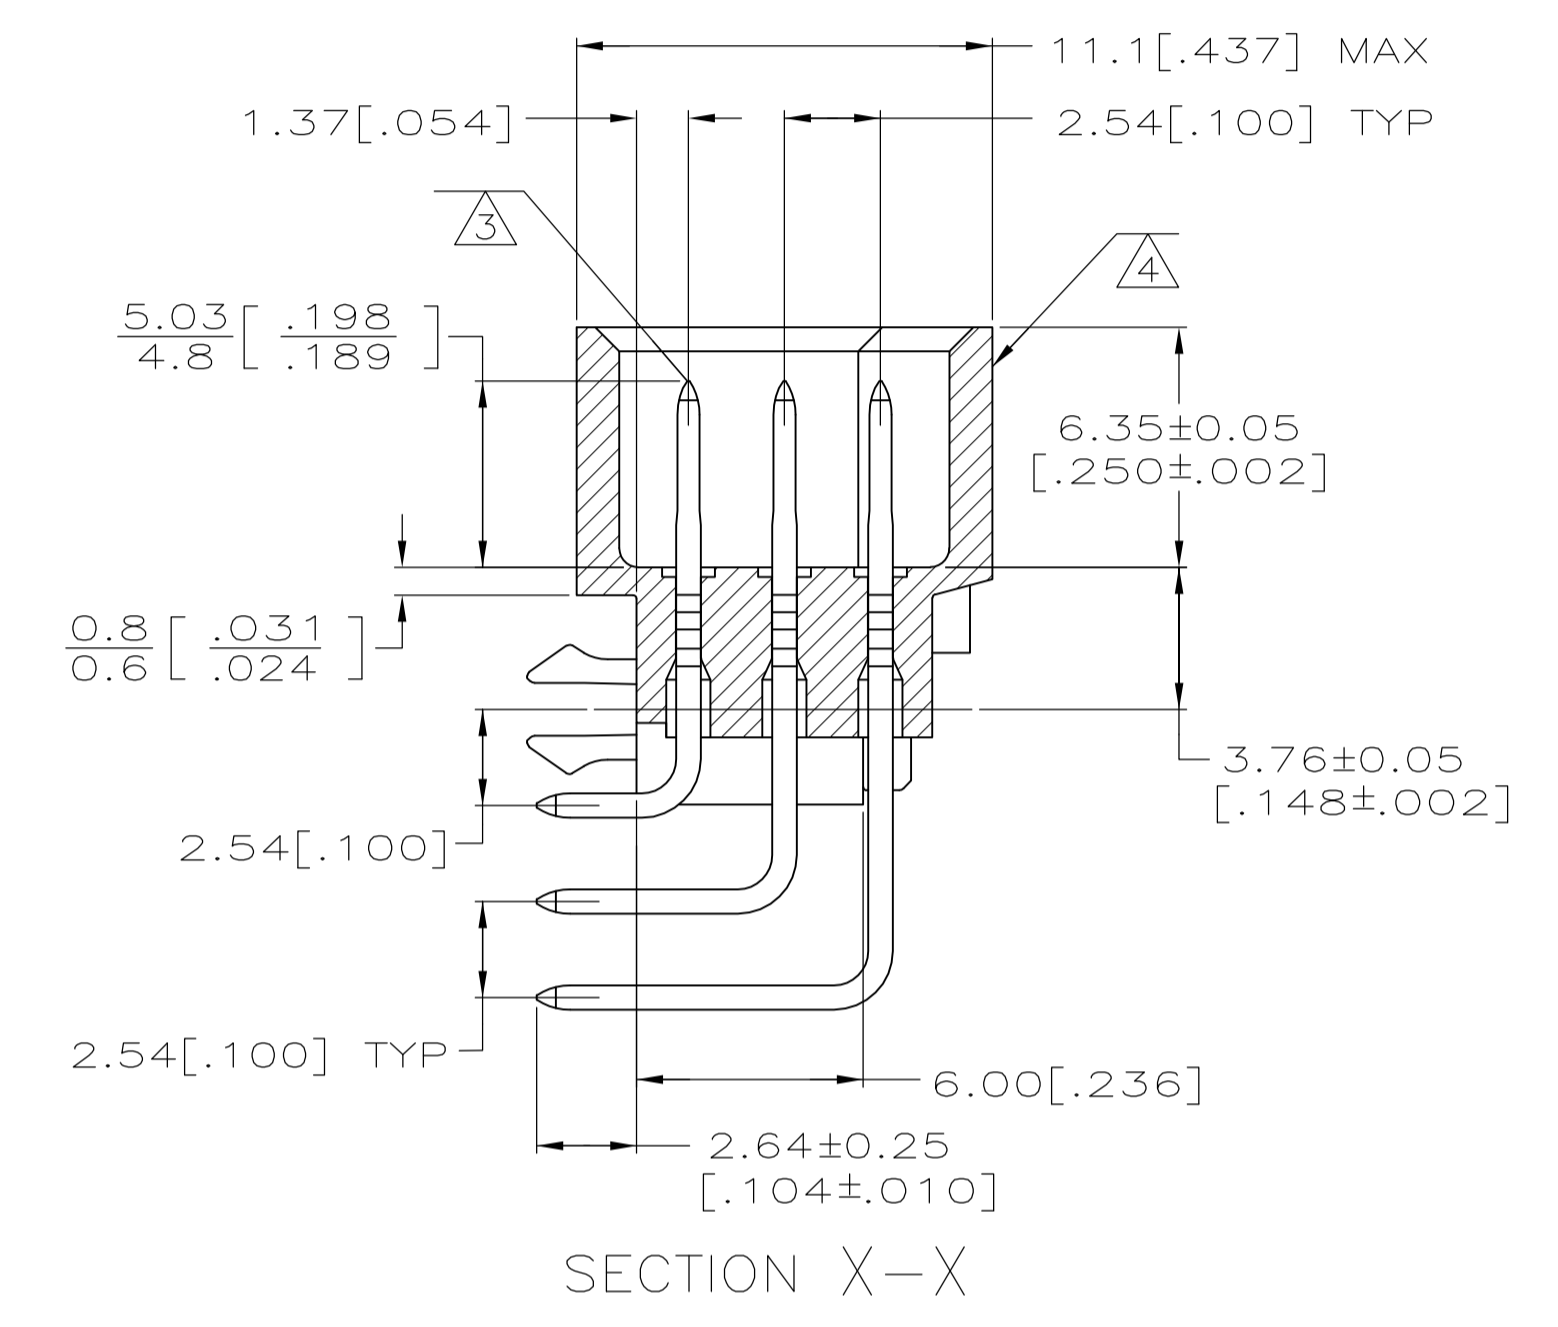

REFERENCE FAMILY DRAWING 650473 FOR ALL TYPE C HEADER OFFERINGS

1-32	X	X	X	96	5650913-5
POSITIONS LOADED	C	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER
	ROWS LOADED				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J. POLIGNONE		OSMAYOS	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		OSMAYOS	
0 PLC ± -		1 PLC ± -		OSMAYOS	
1 PLC ± -		2 PLC ± 0.13[.005]		NAME	
2 PLC ± -		3 PLC ± -		A. SHARPE	
3 PLC ± -		4 PLC ± -		PRODUCT SPEC	
4 PLC ± -		ANGLES ± -		APPLICATION SPEC	
MATERIAL		FINISH		SIZE	
A1		A1		CAGE CODE	
CUSTOMER DRAWING		SCALE 5:1		DRAWING NO	
				A1 00779	
				C=5650913	
				RESTRICTED TO	
				-	
				SHEET 1 OF 1	
				REV R	