




**Newland AIDC**  
Scanning Made Simple

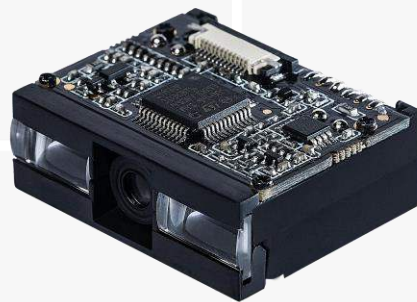

# NLS-EM1300

## OEM SCAN ENGINE

### ○ Advanced Technology

Includes core-technology **UIMG®**, which is independently designed and manufactured by Newland Auto-ID. **UIMG®** technology includes the optical, CMOS, digitizer, decoder, image processing & embedded systems. The scanner supports all global standard ID barcode symbologies. Its reading performance reaches and exceeds global standards. By using the accessories provided, the user can ideally set up the scanner to its user environment.

### ○ Ease of integration

Compact (smaller than a paperclip) and easy to integrate design, image capture device with decoder on one board. The small form factor enables easy integration into various solutions.



CCD



ID Barcode



Mobile Terminal



Kiosk



Scan Engine

# NLS-EM1300

## Performance

Image Sensor		2500 CCD
Illumination		622nm-628nm red LED
Symbologies	ID	Code128, EAN-13, EAN-8, Code39, UPC-A, UPC-E, Codabar, Code 93, Interleaved 2 of 5, ISBN/ISSN, UCC/EAN-128, GSI Databar, etc.
Decoding Speed		300 times/s (max.)
Resolution		≥ 3mil
Depth of Field		EAN-13: 60mm-390mm(13mil) Code 39: 90mm-140mm(5mil)
Min. Symbol Contrast		25%
Scan Angle**		Pitch: ±60°, Skew: ±65°

## Physical

Interface		TTL-232
Rated Power Consumption		188mW (typical)
Operating Voltage		3.3VDC±5%
Current@3.3 VDC	Run Mode	57mA (typical), 89mA (max.)
	Idle	28mA
	Sleep	< 11mA
Dimensions		28.8(W)×23.9(D)×11.6(H) mm (max.)
Weight		6.4g

## Environmental

Operating Temperature	-20°C - +60°C (-4°F - +140°F)
Storage Temperature	-40°C - +70°C (-40°F - +158°F)
Humidity	5% - 95% (non-condensing)
Ambient Light	0-100,000lux (natural light)

## Certificates

Certificates & Protection	FCC Part15 Class B, CE EMC Class B, RoHS
---------------------------	--

## Accessories

NLS-EVK		Software development board for the NLS-EM1300, equipped with a trigger button, beeper and RS-232 & USB interfaces.
Cable	USB	Used to connect the NLS-EM1300 to a host device.
	RS-232	Used to connect the NLS-EM1300 to a host device.
Power Adapter		DC5V adapter to power the NLS-EM1300 with RS-232 cable. Output: DC 5V, 2A    Input: AC 100-240V, 50-60HZ

\*\*Test conditions:

Code 39: 3 Bytes ; Resolution = 10mil; W:N = 3:1 ; PCS = 0.8 ;

Barcode Height = 11mm; Distance = 120mm; T=23°C; Illumination= 200 LUX

Specifications are subject to change without notice.

Version: V4.1

### Newland AIDC

Add: No.1 Rujiang West Rd.,  
Mawei, Fuzhou, Fujian 350001, China  
Tel: +86-591-83979500  
Fax: +86-591-83979216  
Email: info@nlsan.com  
Web: www.newlandaidc.com

### North America & Latin America

Add: 46559 Fremont Blvd.,  
Fremont, CA 94538, USA  
Tel: +1 510 490 3888  
Fax: +1 510 490 3887  
Email: info@nlsan.com  
Web: www.newlandamerica.com

### Europe & Middle East

Add: Rolweg 25, 4104 AV Culemborg,  
The Netherlands  
Tel: +31 (0) 345 87 00 33  
Email: sales@newland-id.com  
Tech Support: tech-support@newland-id.com  
Web: www.newland-id.com

### Asia Pacific

Taiwan:  
Add: 7F-6, No. 268, Liancheng Rd.,  
Zhonghe Dist. 235, New Taipei City, Taiwan  
Tel: +886 2 7731 5388  
Email: info@newland-id.com.tw