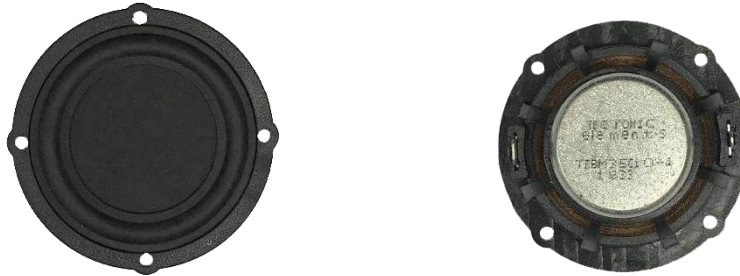


**TEBM35C10-4 Miniature BMR® Driver**

**Features**

- Full range: 100Hz – 20kHz
- Extremely wide directivity; 180°
- Nominal Impedance: 4  $\Omega$
- Diameter: 52mm (54mm OD max)
- Depth: 25.1mm
- Mass: 51.3g

**Applications**

- Portable speakers
- Sound bars and stands
- Flat TV speakers
- Conference speaker phone

**Description**

The TEBM35C10-4 BMR® is an audio drive unit with an extended frequency response and extremely wide directivity. It combines the benefits of Tectonic bending-wave technology and pistonic modes of operation.

The small form-factor is ideally suited for compact products that require a full-range drive unit, room filling sound and a high performance acoustic

**Parameters**

\*

Parameter	Description	min	typ	max	Units
<b>R<sub>e</sub></b>	DC resistance	-10%	4.2	+10%	Ohms
<b>L<sub>e</sub></b>	Inductance (@ 10kHz)	-10%	0.07	+10%	mH
<b>BL</b>	Force factor	-10%	2.03	+10%	Tm
<b>f<sub>s</sub></b>	Resonant frequency	-20%	166	+20%	Hz
<b>SPL</b>	Sound Pressure Level @ 1W, 1m	78.5	80	81.5	dB
<b>dDrv</b>	Voice coil diameter	-	20.4	-	mm
<b>M<sub>ms</sub></b>	Moving mass	-15%	1.08	+15%	g
<b>C<sub>ms</sub></b>	Compliance	-15%	0.86	+15%	mmN <sup>-1</sup>
<b>R<sub>ms</sub></b>	Suspension Loss	-15%	0.3	-15%	Nsm <sup>-1</sup>
<b>X<sub>mech max</sub></b>	Maximum coil excursion (p-p)	-	8.0	-	mm
<b>Sd</b>	Effective piston area	-	11.04	-	cm <sup>2</sup>
<b>V<sub>AS</sub></b>	Equivalent volume	-	0.12	-	L
<b>Q<sub>ms</sub></b>	Mechanical quality factor	-15%	3.4	+15%	
<b>Q<sub>es</sub></b>	Electrical quality factor	-15%	1.05	+15%	
<b>Q<sub>ts</sub></b>	Total quality factor	-20%	0.8	+20%	

Audiomatica CLIO generator at 0 dBu loop-back mode and delta mass method.

Operating conditions

Condition	Value
Power handling (continuous, weighted pink noise)	10W
Operating temperature range	-20 to 55° C
Audio frequency range	100Hz to 20kHz

Measured Response – on axis SPL

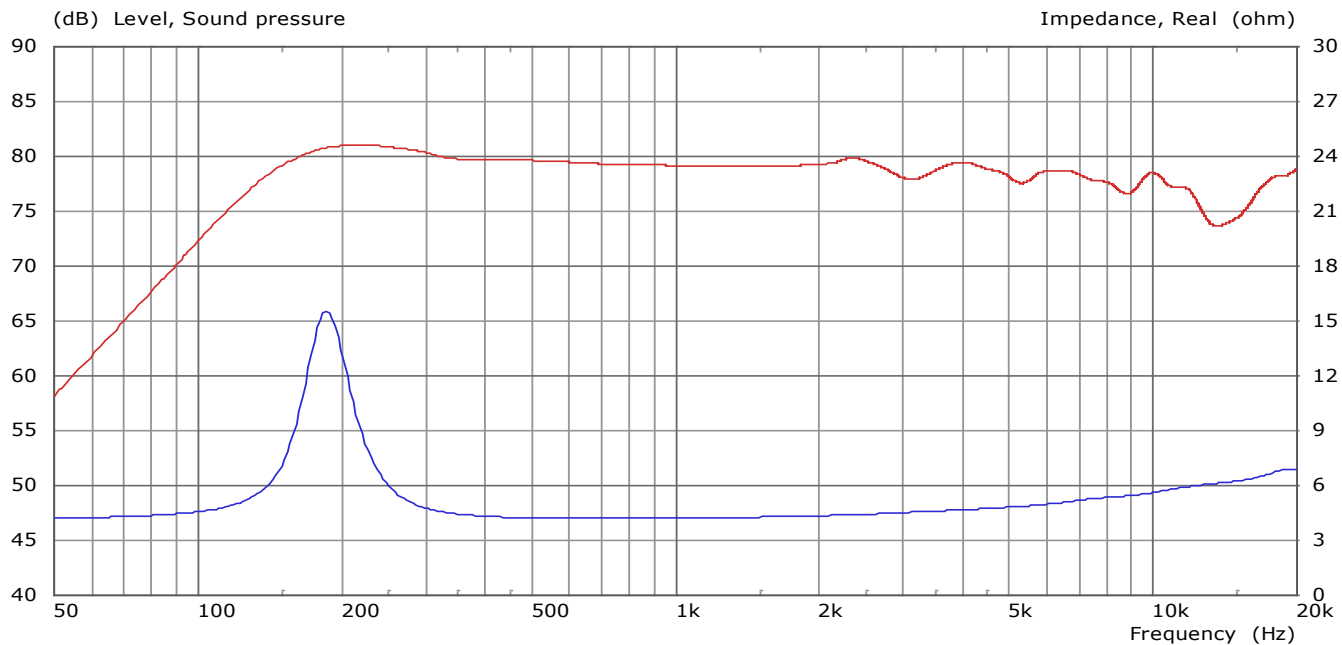


Figure 1: Red: on-axis SPL at 1W/1m (1/3-octave smoothed/spliced anechoic measurement) Blue: Impedance

Measured Response – adjusted power response over frontal hemisphere

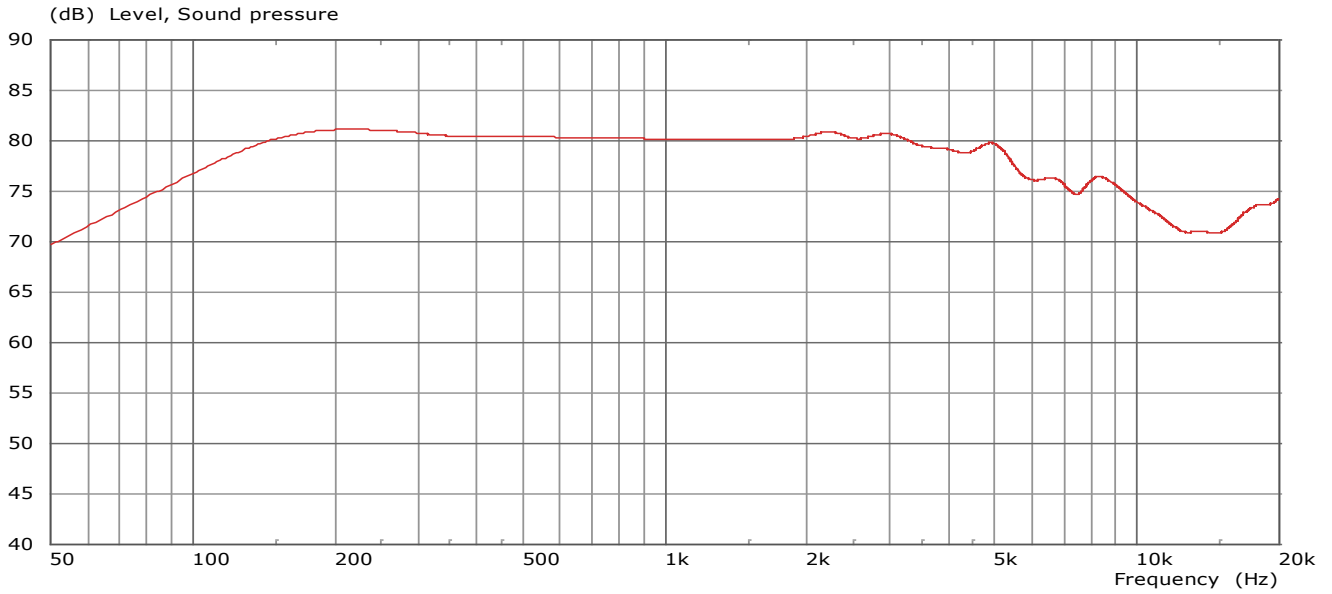


Figure 2: Power Response calculated across -90 -> +90 degrees, 1W/1m, (1/3-octave smoothed/spliced, -11 dB)

Polar – off axis measurements in anechoic chamber at various angles

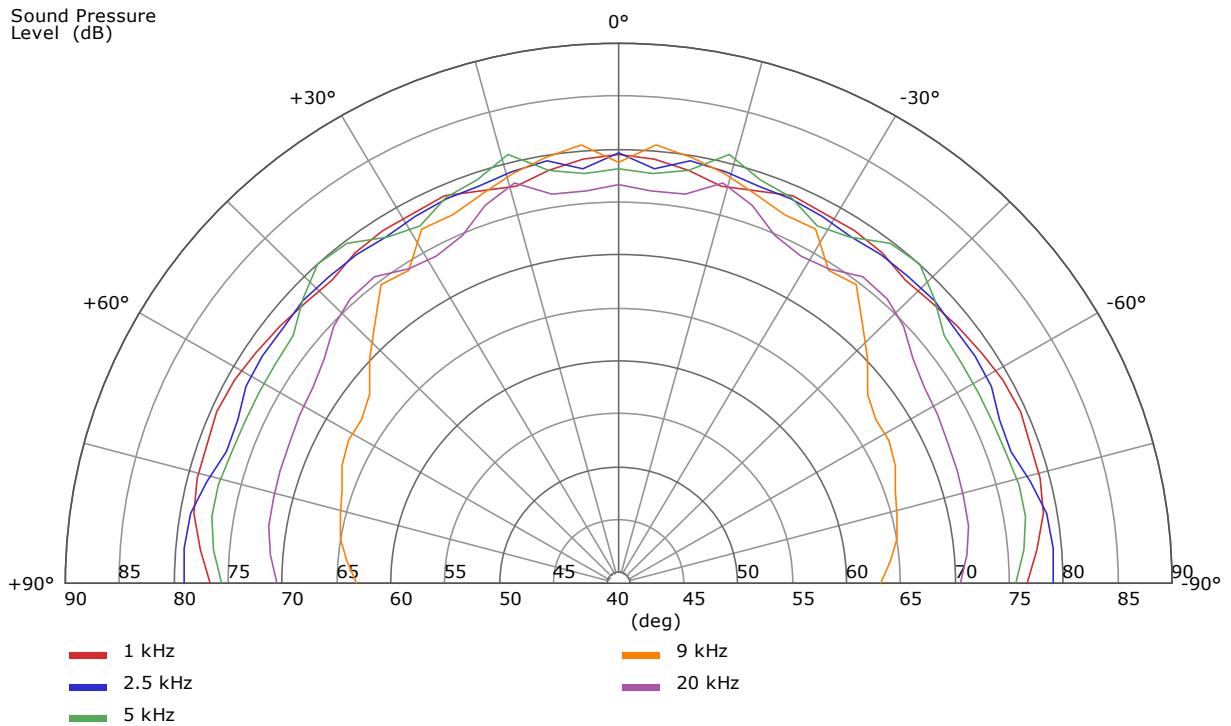


Figure 3: Polar response, angle/dB SPL, input level 1 Watt (1/3<sup>rd</sup> octave smoothing)

Outline Drawing

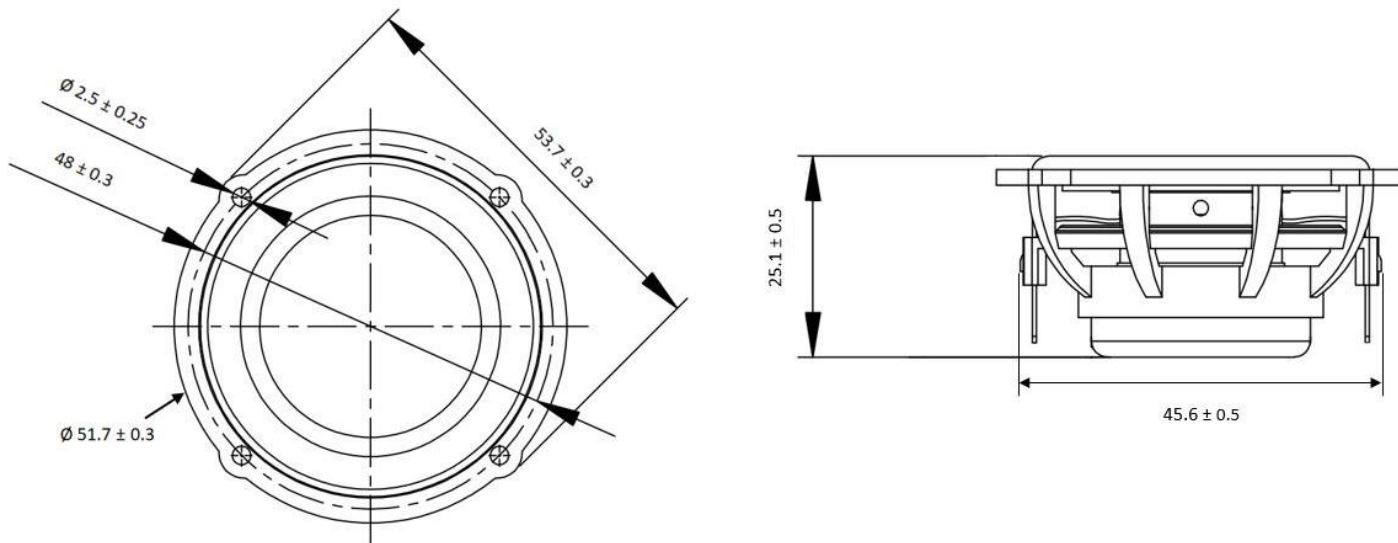


Figure 4: Nominal dimensions

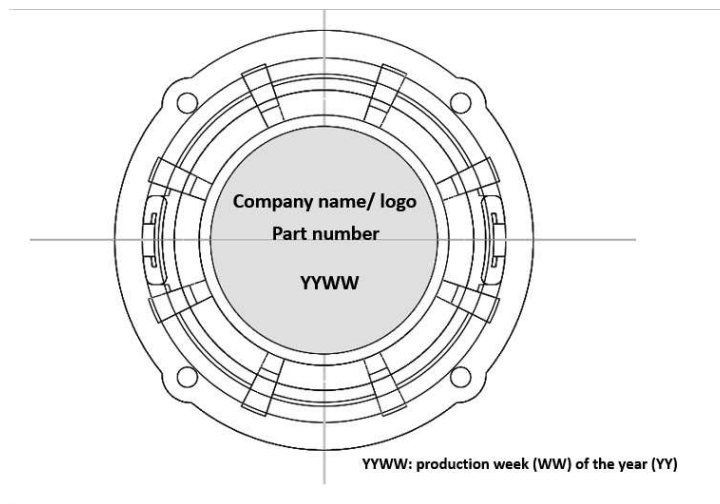


Figure 5: Markings (rear)

Disclaimer: The information in this Data Sheet is subject to change without notification

Please see [www.tectonicaudiolabs.com](http://www.tectonicaudiolabs.com) for Terms and Conditions of Sale