



REV.	REVISION HISTORY	DATE
0	Initial release	Jan.11.2014
1	Change the length	Nov.04.2014

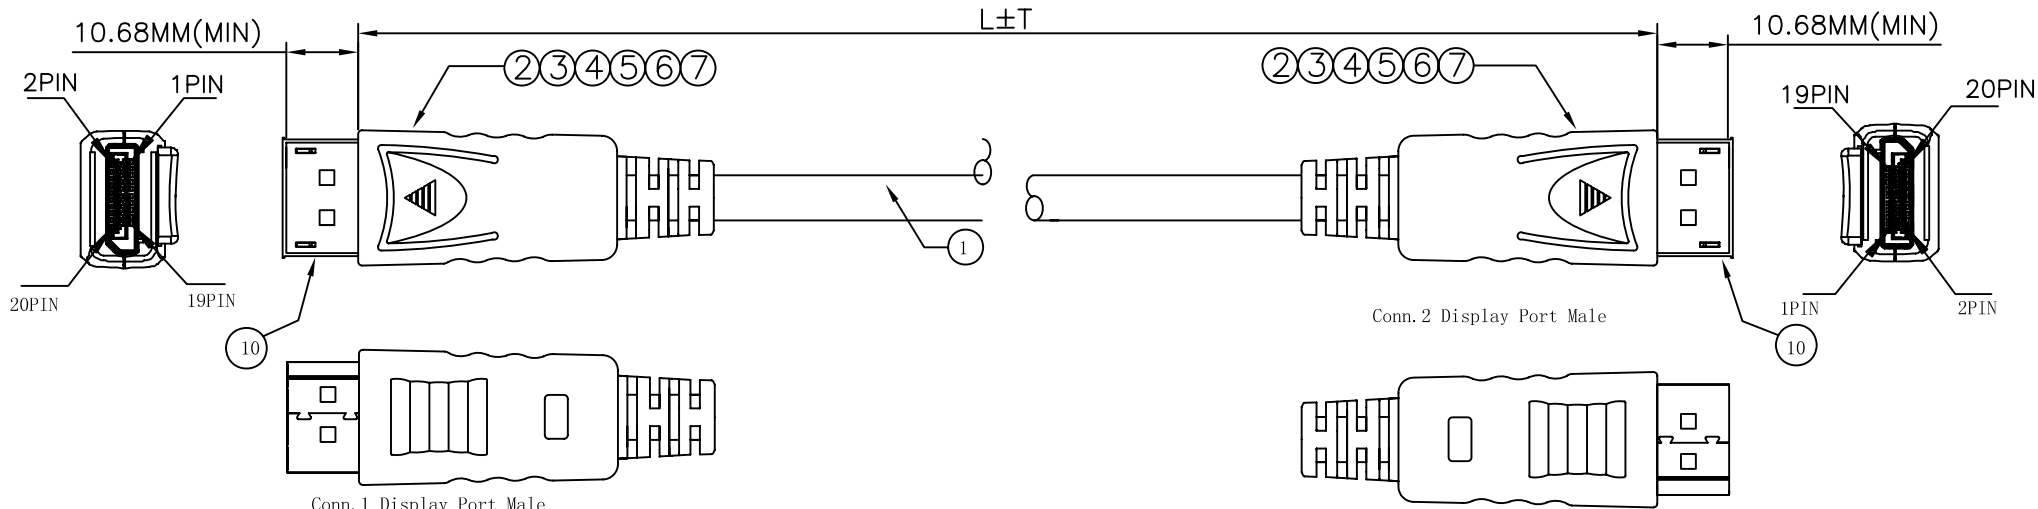


P/N	L(FT)	T(MM)	PE BAG
P580-001	1FT	10mm	7"*9"*0.08 mm
P580-003	3FT	15mm	7"*9"*0.08 mm
P580-006	6FT	20mm	7"*9"*0.08 mm
P580-010	10FT	30mm	7"*9"*0.08 mm

Electrical Test:

1. 100% Test(Open ,short ,miss wire)
2. Contact Resistance:3 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot: 300V DC/10ms



Pin Assignment

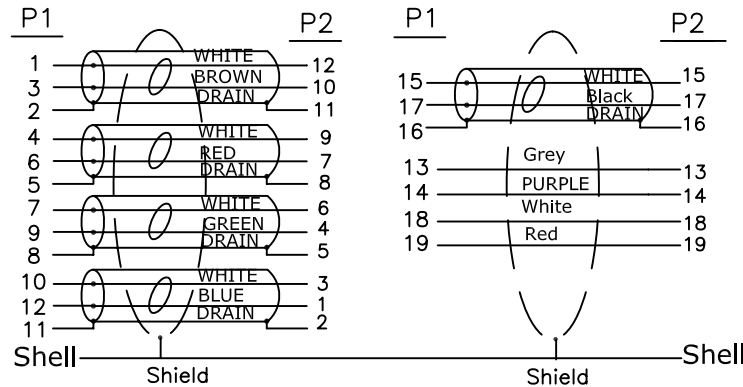

NO	DESCRIPTION	Q'TY	UNIT	TOLERANCE			Tripp Lite				
				INCHES	M/M						
7	DisplayPort M Transparent dust cover	2	pcs	.X	.015	.30	TITLE: Display Port M to M Cable				
6	Inside Molding:PE	4	g	.XX	.010	.10					
5	45P Black PVC	10	g	.XXX	.005	.05					
4	DisplayPort (DP01#) M Black ABS down Shell	2	pcs	DRAWN BY	HELONGCHAO			CUSTOMER :			
3	DisplayPort M(DP01#) Black ABS UP Shell	2	pcs	CHECK BY				CUSTOMER NO. :			
2	DisplayPort M Insulation:Black,Shell nickelplate	2	pcs	APPD BY				SCALE	NONE	DRAWING NO. :	REV. B
1	Display Por UL20276 (7/0.102TA*1PR+EAM)*5+7/0.102TA*5C+AEB<AL> 50% B=16/5/0.12AL OD:6.0MM BLACK	L	m			UNIT	MM				1/5
						DATE	2014.01.11				