

IMPACT

TE Internal #: 2057410-1

High Speed Backplane Connectors, 96 Position, Mating Alignment, Guide Slot Mating Alignment Type, 6 Row, 16 Column, PCB Mount

Receptacle, IMPACT

View on TE.com >



Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors











Connector System: Board-to-Board

Number of Positions: 96

Row-to-Row Spacing: 1.35 mm [.053 in]

Mating Alignment: With

Mating Alignment Type: Guide Slot

Features

Product Type Features

Connector System Board	d-to-Board
PCB Connector Assembly Type PCB N	Mount Receptacle
Shroud Style Unshr	rouded
Connector & Contact Terminates To Printe	ed Circuit Board
Configuration Features	
Number of Ground Positions 32	
Number of Pairs 32	
Stackable	
Number of Signal Positions 64	
Number of Positions 96	
Number of Rows 6	
Number of Columns 16	
PCB Mount Orientation Right	Angle



II + 1 000 F22 47F2	07/31/2023 06
Mating Alignment	With
PCB Mount Retention Type	Action/Compliant Tail & Screw
PCB Mount Retention	With
Mating Retention	Without
Guide Hardware	With
PCB Mount Alignment Type	Locating Posts
Mechanical Attachment	
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Termination Post & Tail Length	1.2 mm[.047 in]
Termination Features	
Contact Current Rating (Max)	.75 A
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Tin
Contact Underplating Material	Nickel
Contact Shape & Form	Dual Beam
PCB Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.762 μm[30 μin]
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Type	Socket
Contact Layout	Inline
PCB Contact Termination Area Plating Material Thickness	1.27 μm[50 μin]
Contact Features	
Primary Product Color	Black
Body Features	
Data Rate	20 – 25 Gb/s
Number of Differential Pairs per Column	2
Signal Characteristics	
Operating Voltage	30 VAC
Impedance	100 Ω
Electrical Characteristics	
Guide Location	Right



Mating Alignment Type	Guide Slot
Connector Mounting Type	Board Mount
Housing Features	
Number of Shrouded Sides	0
End Wall Location	None
Housing Material	LCP - GF (Liquid Crystal Polymer)
Centerline (Pitch)	1.9 mm[.075 in]
Dimensions	
Connector Length	38 mm[1.496 in]
Connector Height	10.9 mm[.429 in]
Connector Width	20.1 mm[.791 in]
PCB Thickness (Recommended)	1.6 mm
PCB Hole Diameter	.39 mm[.015 in]
Row-to-Row Spacing	1.35 mm[.053 in]
Usage Conditions	
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Approved Standards	CSA Certified, UL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box & Tube, Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233)



				$C \setminus I \setminus I \subset$
11000	$n \cap t$	contain	$R \vdash N \vdash H$	< \ / H (
	Π	COHIGH	REACH	$\mathbf{J} \mathbf{V} \mathbf{I} \mathbf{I} \mathbf{V}$

Free		alogen - Br, Cl, F, I < 900 ppm per genous material. Also BFR/CFR/PVC
------	--	--

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Also in the Series | IMPACT

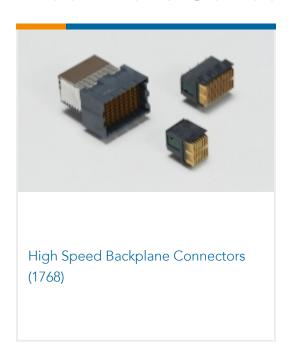

Customers Also Bought





TE Part #1934226-1
Tin man Recpt Assy3pair8 Colum



TE Part #2170288-1 1X4 CAGE ASSEMBLY, THRU BEZEL, QSFP



TE Part #2308171-1
ZQSFP+ CAGE& CONN 2X2, EMI
SPRING, BTB





TE Part #2170507-5 1X3 QSFP CAGE ASSY

TE Part #2100870-1 C/A, SFP+, 1M 30AWG, JUNIPER

TE Part #2100870-3 C/A, SFP+, 7M 24AWG, JUNIPER TE Part #2100870-4 C/A, SFP+, 5M 24AWG, JUNIPER



Documents

Product Drawings

IMP100S,R,RA2P16C,RG,39

English

CAD Files

Customer View Model

ENG_CVM_CVM_2057410-1_A.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2057410-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2057410-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages



7-1773458-1_IMPACT_BACKPLANE_CONNECTOR_SYSTEM_CATALOG

English

Product Specifications

Application Specification

English

Application Specification

English

Product Environmental Compliance

MD_2057410-1_05242018828_dmtec

English

MD_2057410-1_05242018828_dmtec

English

Agency Approvals

Agency Approval Document

English