


REVISION		
REV	DESCRIPTION	DATE
C	REVISED DWG PER DCR NO. C050832	1/10/06



BLUE STRIPE
DENOTES STUB CABLE

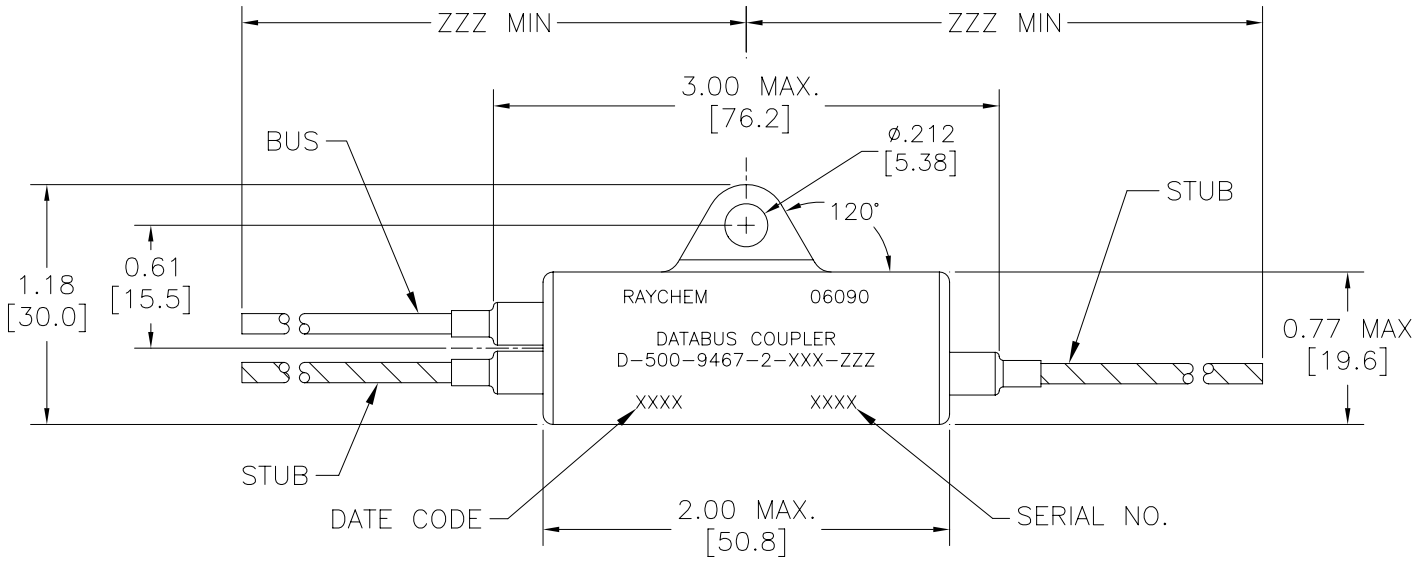

PART NO. D-500-9467-2-XXX-ZZZ

2 = DOUBLE STUB
 LENGTH OF CABLE (INCHES)
 CABLE

S16 = OPTIMIZED SINGLE SHIELD
 S36 = OPTIMIZED DOUBLE SHIELD
 S86 = EMP HARDENED

COMONENT NUMBER	BUS CABLE	STUB CABLE
D-500-9467-2-S16-ZZZ	7724S1664-9	7724S1664-96
D-500-9467-2-S36-ZZZ	7724S3664-9	7724S3664-96
D-500-9467-2-S86-ZZZ	7724S8664-9	7724S8664-96

© 2006 Tyco Electronics Corporation. All Rights Reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision

SPECIFICATION CONTROL DRAWING			
DRAWN T RATZLAFF		DATE 20FEB2001	
MATERIAL 		TITLE DATABUS MICROCOUPLER DOUBLE STUB, W/INT TERMINATOR AND MTG LUG, LOW OUTGASSING	
FINISH 		SIZE A	CODE IDENT. NO. 06090
THIRD ANGLE PROJECTION 		DWG. NO. D-500-9467-2-XXX-ZZZ	
DO NOT SCALE THIS DRAWING			SHEET 1 OF 2

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE INCHES. METRIC
 DIMENSIONS ARE IN BRACKETS.

DECIMAL TOLERANCES
 .XXX ± 0.005 [0.13 mm]
 .XX ± 0.010 [0.25 mm]
 .X ± 0.020 [0.50 mm]

ANGLE TOLERANCE
 .X ± 0.5 DEG.

WEIGHT
 LBS. 0.0353 [16.0 gm]

CAD FILE
C050832A

1. MATERIAL AND FINISHES:

1.1 INTERNAL COMPONENTS

- 1.1.1 TRANSFORMER TO MIL-PRF-21038 AND MIL-STD-1553B
- 1.1.2 ISOLATION RESISTORS TO MIL-PRF-39007/8, 57.6 OHMS
- 1.1.3 TERMINATION RESISTORS TO MIL-PRF-39007/8, 76.8 OHMS
- 1.1.4 INTERNAL AND EXTERNAL COMPONENTS ATTACHED USING SN96 SOLDER
- 1.2 SHIELDED CASE: ALUMINUM PER ASTM-B618.
- 1.2.1 CASE FINISH: 65/35 Sn/Ni ALLOY, .0002/.0003 THK.
- 1.3 CABLE TYPE PER RAYCHEM SPECIFICATION 1200 (SEE TABLE ON SHEET 1).
- 1.4 STRAIN RELIEF TUBING: RAYCHEM RT-220, LOW OUTGASING TUBING.

2. APPLICATION:

- 2.1 THIS COUPLER IS DESIGNED TO BE INSTALLED INTO A DIGITAL MULTIPLEX HARNESS MEETING THE REQUIREMENTS OF MIL-STD-1553B AND NASA'S OUTGASSING SPECIFICATION SP-R-0022A.
- 2.1.1 THIS PRODUCT IS ASSEMBLED USING LOW OUTGASSING MATERIALS.
- 2.1.2 THIS PRODUCT IS NOT INTENDED FOR USE IN HIGH MOISTURE ENVIRONMENTS, NOR INTENDED FOR APPLICATIONS WHERE FLUID IMMERSION IS NECESSARY.
- 2.2 FOR CABLE SPLICING USE SPLICE KIT D-150-9708-5 (NOT SUPPLIED).
- 2.3 CABLE BEND RADIUS PER SAE-AS50881 STATIC BEND: 5 X CABLE O.D. MIN.
DYNAMIC BEND: 10 X CABLE O.D. MIN.

3. TEMPERATURE:


- 3.1 OPERATING TEMPERATURE: -65°C TO +150°C CONTINUOUS.

4. PERFORMANCE SPECIFICATIONS:

- 4.1 TRANSFORMER MEETS THE PERFORMANCE REQUIREMENTS OF MIL-STD-1553B.

5. WEIGHT:

- 5.1 MAXIMUM WEIGHT WITHOUT CABLE: 16 GRAMS MAX.

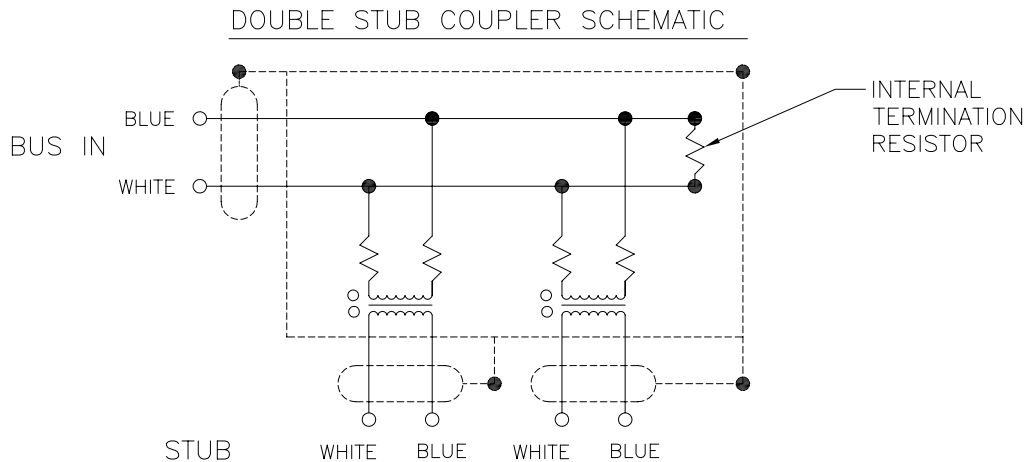

© 2006 Tyco Electronics Corporation. All Rights Reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision

SPECIFICATION CONTROL DRAWING

DRAWN T RATZLAFF	DATE 20FEB2001	SIZE A	CODE IDENT. NO. 06090	DWG. NO. D-500-9467-2-XXX-ZZZ	REV C
CAD FILE C050832B		tyco Electronics		DO NOT SCALE THIS DRAWING	
				SHEET 2 OF 2	