

### 5 GHz 19 dBi MIMO SECTOR ANTENNA

The Laird SA4958-120-19-DP 5.5 GHz wide-band, dual-slant polarized 120° sector antenna covers frequencies from 4.9-5.85 GHz. Extremely low-side lobes, null fill below the horizon, and uniform energy distribution with the coverage area are achieved thanks to our highly skilled engineering staff and the utilization of our proprietary Artificial Intelligence RF Optimizing development tool. Laird suite of high-performance sector antennas feature proprietary design elements resulting in extremely high levels of system performance and ruggedness while maintaining very slim profiles with low wind and ice loading.

### FEATURES

- 4.9-5.85 GHz full-band coverage
- Ultra low-side lobe performance
- Maximum null fill below the horizon
- Uniform cell coverage
- Rugged carrier class construction

### MARKETS


- High multi-path environment
- Large carrier class deployment
- Wireless broadband service provider
- Optimized for MIMO space time processing

### SPECIFICATIONS


PARAMETER	SPECIFICATIONS
Frequency Range	4900-5850 MHz
Bandwidth	950 MHz
Gain	2 x 19 dBi
Horizontal Beamwidth	120°
Vertical Beamwidth	4°
F/B Ratio	>20 dB
Isolation	>25 dB
VSWR	<1.5 Typel; Max 1.7
Nominal Impedance	50Ω
Polarization	V and H
Max. Power	100 W
Dimension	700 mm x 140 mm x 50 mm
Weight	3 kg
Rated Wind Velocity	60 m/s
Connector Type	2 x N-female
Diameter Of Pole	30-70 mm

### ANTENNA PATTERNS

H Plane

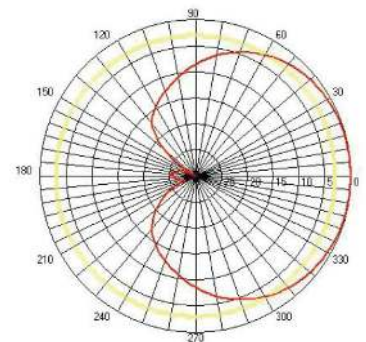

E Plane

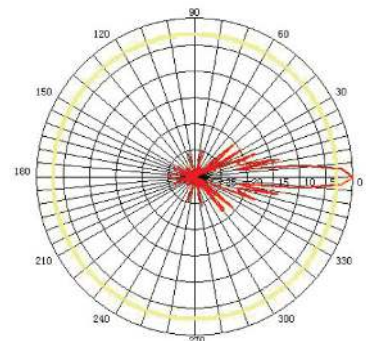

Americas: +1.847 839.6907  
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941  
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127  
IAS-AsiaSales@lairdtech.com

[www.lairdtech.com](http://www.lairdtech.com)

### SPECIFICATIONS

PARAMETER	SPECIFICATIONS
Frequency Range	4900-5850 MHz
Bandwidth	950 MHz
Gain	2 x 19 dBi
Horizontal Beamwidth	120°
Vertical Beamwidth	4°
F/B Ratio	>20 dB
Isolation	>25 dB
VSWR	<1.5 Typel; Max 1.7
Nominal Impedance	50Ω
Polarization	V and H
Max. Power	100 W
Dimension	700 mm x 140 mm x 50 mm
Weight	3 kg
Rated Wind Velocity	60 m/s
Connector Type	2 x N-female
Diameter Of Pole	30-70 mm

ANT-DS-SA4958-120-19-DP 1114

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2014 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.