


REV. 0  
DCO 15753

COIL: @ 25°C	
RESISTANCE	160 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.3 VDC
MUST RELEASE	.75 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE TIME 6 MS MAX.  
RELEASE TIME 3 MS MAX.  
CONTACT BOUNCE 3 MS MAX.

CUSTOMER DATA SHEET

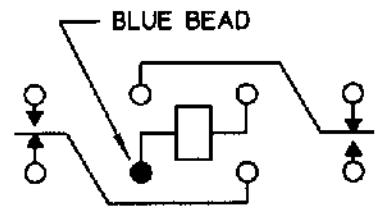

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO  
2 AMPS 30 VDC RESISTIVE  
100,000 OPERATIONS

DR. B.D. 7/20/99 CK. GAH 7-20-99

**COMMUNICATIONS**  
**INSTRUMENTS, INC.**

CUST. HI-G  
CUST. NO. 2B-1C-112 REV.

FW RELAY

FW1102S07