Panel Potentiometer

Model P110 Series

Electronics

Features:

- 11 mm rotary
- Insulated shaft
- Conductive plastic element

Top Adjust, PCB pins, with Bushing

• With/without bushing





P110KH1

Model Styles Available						
Side Adjust, PCB pins	P110KV					
Side Adjust , PCB pins, with Bushing	P110KV1					
Top Adjust, PCB pins	P110KH					

Madal Styles Available

Electrical

Resistance Range, Ohms	500-1M
Standard Resistance Tolerance	± 20%
Residual Resistance	20 ohms max.
Input Voltage, maximum	50 Vac max.
Power rating, Watts	0.05
Dielectric Strength	500Vac, I minute
Insulation Resistance, Minimum	100M ohms at 500Vdc
Sliding Noise	100mV max.
Actual Electrical Travel, Nominal	260°

Mechanical

Total Mechanical Travel	300°± 10°
Static Stop Strength	40 oz-in
Rotational Torque	0.5 to 1.25 oz-in

Environmental


Operating Temperature Range	-20°C to +70°C
Rotational Life	30,000 cycles

Panel Potentiometer


Model P110 Series



Ordering

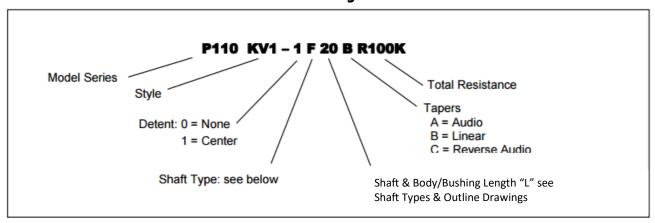


Shaft Types

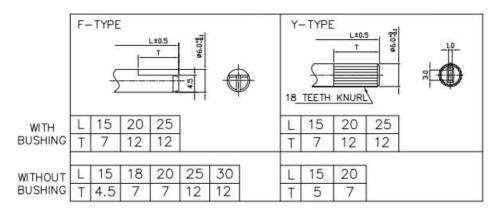

STANDARD RESISTANCE VALUES, OHMS

500	1K	2K	5K	10K	20K	50K	100K	200K	500K	1MEG

CIRCUIT DIAGRAM




Model P110 Series




Outline Drawings

Model P110KV (Side Adjust, PCB pins)

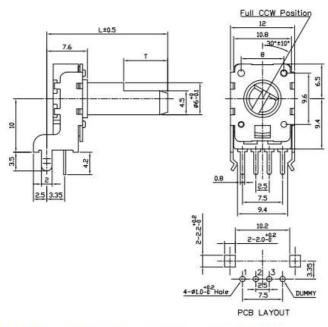

Model P110KV1 (Side Adjust, PCB pins, with Bushing)

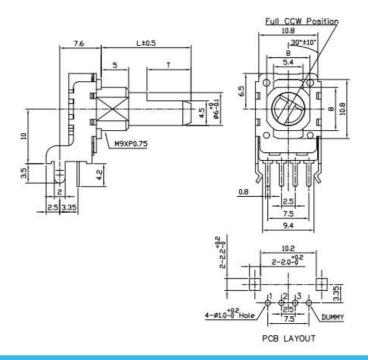


Model P110 Series



Outline Drawings

Model P110KH (Top Adjust, PCB pins)

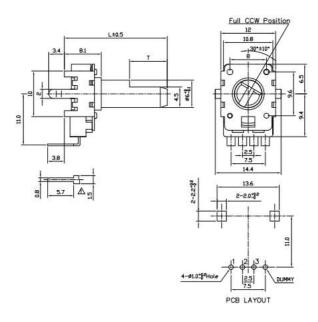

Model P110KH1 (Top Adjust, PCB pins, with Bushing)

