

# Que-2-TXT™ Questions? scan to text us fast



# HID EQUAL LED LAMPS

# **LARGE GEN 4 OMNI**




#### specifications

Consumption	Voltage	CRI	Lens	Heat Sink	L70 hours	Surge Protection	Ambient Temp (F)	Power Factor	UL listing	THC	Beam Angle	Enclosed Fixture Rated
75W - 100W	100 - 277 V 🗲	> 80	clear polycarbonate	aluminum	50,000	6 KV built-in	-40° - 113°	> 0.9	damp location	< 20%	omni-directional	yes


#### select your lamp

Part Number	Color Temp	Base	Lumen Output	Efficacy	Consumption
GI-CC-360D400-UL4	4000K	EX39	15,000	155 lm / W	75W - 100W selectable
GI-CC-360C400-UL4	5000K	EX39	15,000	155 lm / W	75W - 100W selectable
GI-CC-360CCT400-UL4	4000K 5000K selectable	EX39	15,000	155 lm / W	75W - 100W selectable




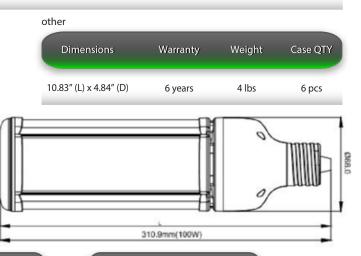


# **⊕F©**




### Luminous Intensity Distribution



## Distance vs Illumination



## Isolux Diagram



Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.













