

Surge protection device - PT-IQ-1X2-12DC-UT - 2800793

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Surge protection, consisting of protective plug and base element, with integrated multi-stage status indicator on the module for one 2-wire floating signal circuit.

The figure shows the PT-IQ-1x2-24DC-UT version

Product Features

- Surge protection system
- Multi-level state monitoring
- Collective message about supply and remote module
- System supplied via DIN rail bus
- Up to 28 protection modules per supply module
- Maximum ease of maintenance thanks to the two-piece design
- Codable plug
- Impedance-neutral disconnection of plug for maintenance purposes
- Base element remains an integral part of the installation



Key commercial data

| | |
|--------------------------------------|-----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 140.0 GRM |
| Custom tariff number | 85363010 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|--------|---------|
| Height | 91.1 mm |
| Width | 17.7 mm |

Surge protection device - PT-IQ-1X2-12DC-UT - 2800793

Technical data

Dimensions

| | |
|------------------|---------|
| Depth | 77.5 mm |
| Horizontal pitch | 1 Div. |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -40 °C ... 70 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Degree of protection | IP20 |

General

| | |
|---|--|
| Housing material | PA 6.6 |
| Inflammability class according to UL 94 | V0 |
| Color | black |
| Mounting type | DIN rail mounting |
| Type | DIN rail module, two-section, divisible |
| Direction of action | Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground |

Protective circuit

| | |
|--|----------------------------------|
| IEC test classification | C1 |
| | C2 |
| | C3 |
| | D1 |
| Nominal voltage U_N | 12 V DC |
| Maximum continuous operating voltage U_C | 15 V DC |
| | 10 V AC |
| Nominal current I_N | 1000 mA (Up to 45°C) |
| Operating effective current I_C at U_C | ≤ 1 mA (per system) |
| Residual current I_{PE} | ≤ 2 μ A (per system) |
| Nominal discharge current I_n (8/20) μ s (Core-Core) | 10 kA |
| Nominal discharge current I_n (8/20) μ s (Core-Earth) | 10 kA |
| Total surge current (8/20) μ s | 20 kA |
| Impulse discharge current (10/350) μ s, peak value I_{imp} | 2.5 kA |
| Voltage protection level U_p (Core-Core) | ≤ 65 V (C1 - 1 kV/500 A) |
| | ≤ 95 V (C2 - 10 kV / 5 kA) |
| | ≤ 110 V (C2 - 10 kA) |
| | ≤ 35 V (C3 - 25 A) |
| | ≤ 40 V (C3 - 50 A) |
| Voltage protection level U_p (Core-Earth) | ≤ 600 V (C1 - 1 kV/500 A) |
| | ≤ 750 V (C2 - 10 kV / 5 kA) |

Surge protection device - PT-IQ-1X2-12DC-UT - 2800793

Technical data

Protective circuit

| | |
|--|--------------------------|
| | ≤ 800 V (C2 - 10 kA) |
| | ≤ 700 V (C3 - 25 A) |
| | ≤ 800 V (C3 - 100 A) |
| Voltage protection level U_p static (core-core) | ≤ 41 V (C1 - 1 kV/500 A) |
| Response time t_A (Core-Core) | ≤ 1 ns |
| Response time t_A (Core-Earth) | ≤ 100 ns |
| Input attenuation a_E , sym. | typ. 0.3 dB (≤ 95 kHz) |
| Cut-off frequency f_g (3 dB), sym. in 150 Ohm system | typ. 600 kHz |
| Capacity (Core-Earth) | 4 nF |
| Resistance in series | 1.2 Ω ±5 % |
| Surge protection fault message | Optical, multi-stage |
| Max. required back-up fuse | 1 A (FF) |
| Surge carrying capacity in acc. with IEC 61643-21 (Core-Core) | C1 (1 kV/500 A) |
| | C2 (10 kV/5 kA) |
| | C2 (10 kA) |
| | C3 - 25 A |
| | C3 (50 A) |
| Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth) | C1 (1 kV / 500 A) |
| | C2 (10 kV / 5 kA) |
| | C2 (10 kA) |
| | C3 (25 A) |
| | C3 (50 A) |
| | C3 - 100 A |
| | D1 - 2,5 kA |
| Pulse reset time t_r in acc. with IEC 61643-21 (Core-Core) | ≤ 25 ms |
| Pulse reset time t_r in acc. with IEC 61643-21 (Core-Earth) | ≤ 50 ms |
| Overload failure mode as per IEC 61643-21 (plug) | Mode 2 |

Connection data

| | |
|--|-----------------------|
| Connection method | Screw connection |
| Connection type IN | Screw terminal blocks |
| Connection type OUT | Screw terminal blocks |
| Tightening torque | 0.5 Nm |
| Stripping length | 8 mm |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |

Surge protection device - PT-IQ-1X2-12DC-UT - 2800793

Technical data

Connection, equipotential bonding

| | |
|-------------------|---|
| Connection method | NS 35 DIN rail or connection terminal block |
|-------------------|---|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140201 |
| eCl@ss 4.1 | 27130801 |
| eCl@ss 5.0 | 27130801 |
| eCl@ss 5.1 | 27130801 |
| eCl@ss 6.0 | 27130807 |
| eCl@ss 7.0 | 27130807 |
| eCl@ss 8.0 | 27130807 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000943 |
| ETIM 4.0 | EC000943 |
| ETIM 5.0 | EC000943 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30212010 |
| UNSPSC 7.0901 | 39121610 |
| UNSPSC 11 | 39121610 |
| UNSPSC 12.01 | 39121610 |
| UNSPSC 13.2 | 39121620 |

Approvals

Approvals

Approvals

UL Listed

Ex Approvals

Approvals submitted

Surge protection device - PT-IQ-1X2-12DC-UT - 2800793


Approvals

Approval details




Drawings

Diagram

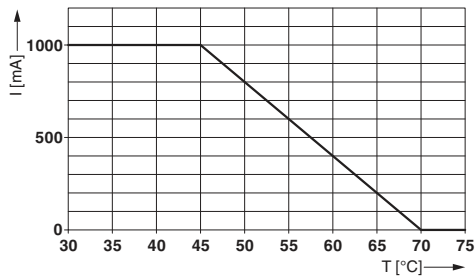

Dimensioned drawing

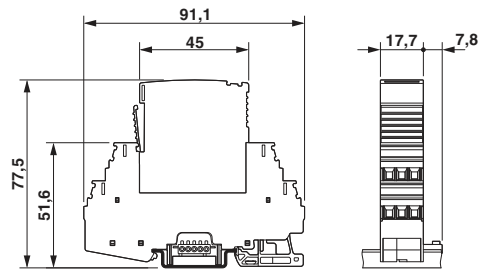

Circuit diagram

