


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Apr
-		RELEASED	5/5/14	
A		REVISED SPEC.	6/4/14	HR/VY
B		REVISED LAYOUT DIM.	11/25/14	AY/MY
C		UPDATE DRAWING	3/29/18	AY/KC



SPECIFICATIONS:
 Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 Contact: Brass, Tin plated
 Electrical:
 Voltage rating: 300 V
 Current rating: 8A
 Contact resistance: 20 mohms max
 Insulation resistance: 500 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 2,000 VAC for 1 minute
 Temperature Rating:
 -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.

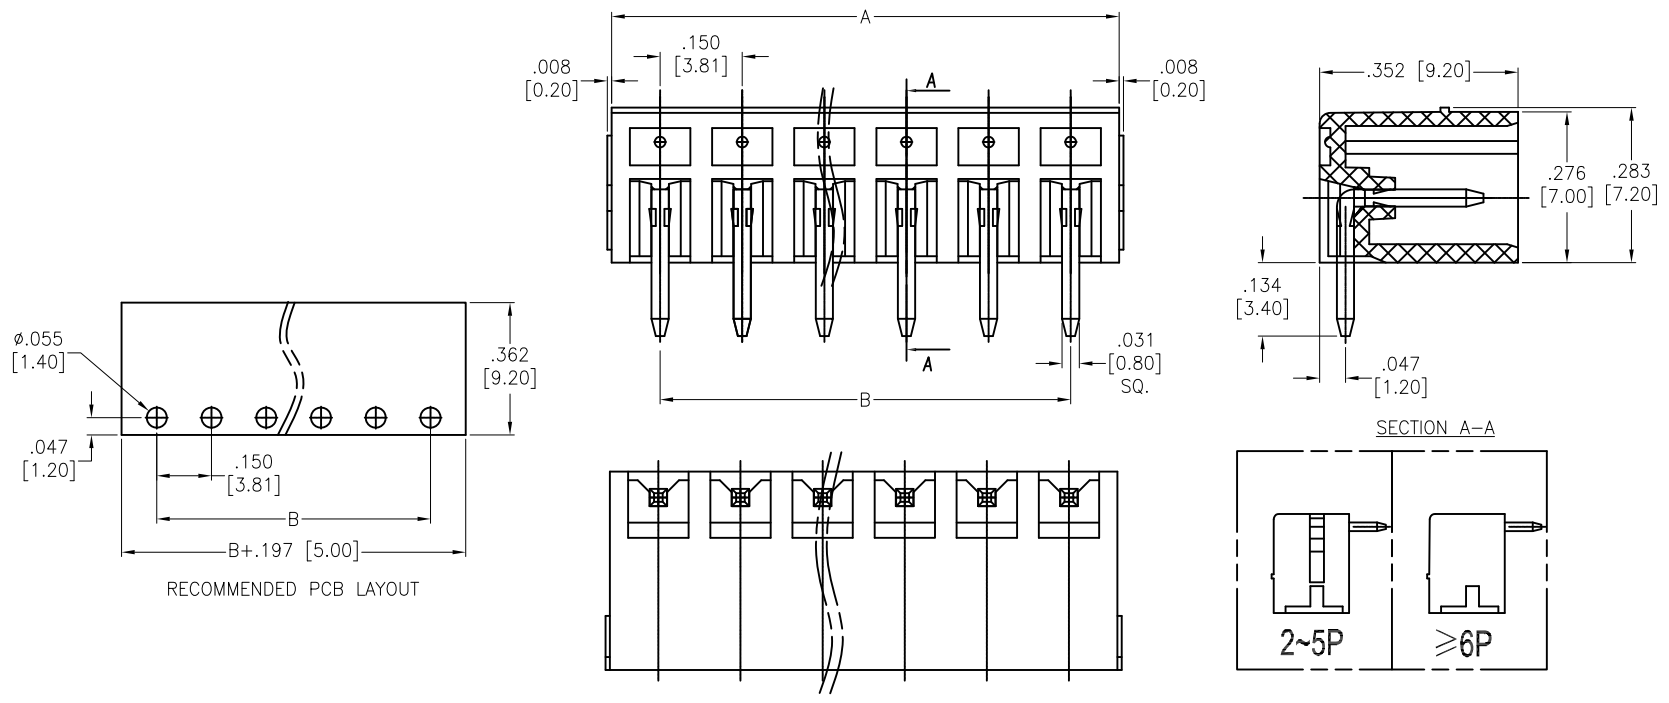

Positions: 02 thru 24
 A= .150 [3.81] x No. of Spaces + .181 [4.60]
 B= .150 [3.81] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS DRAWN HR 5/5/14 CHECKED SY 5/5/14 APPROVED		DATE 5/5/14		TITLE TERMINAL BLOCK, RIGHT ANGLE, .150" [3.81] PITCH	
SIZE X		PART NO. EBSA-XX-B		REV. C	
REF: S00067C		SCALE: NTS		SHEET 1 OF 1	