

Ŧ	G	нт — — — — — — — — — — — — — — — — — — —	m	0



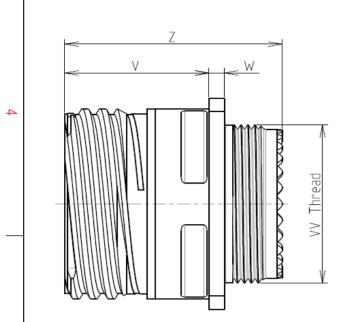

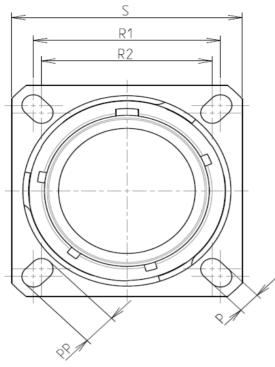

## CHARACTERISTICS

ω

-Mass

\_

BASIC SERIES:

SHELL SIZE : 11

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

\_-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 500 hours			

: 32.59 g ± 10%

8D 0

G

11

-

S

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

m m		0	Ξ		
S R1 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2					4
		LAYOUT SHO	WN AS EXAMPLE		
Keying Shown as example Connector dimension					
DimNominalP3.25±0.2PP4.93±0.2R120.62R218.26S26.2±0.3V20.83+0/-1.25W2.1/2.5Z31.5 MaxVV THREADM15x1-6g		the Specifications issued by (professional recon	ducts which does not con either of the Parties or b nmendation, technical no	nply with y a third party	2
	A 07-10-2016	First Release			
	ISS DATE Designed By:	Latest modification - by Date:		CUSTOMER DRAWING	MOD N°
	TITLE		ess Steel Recepta		
05 B N	SCALE -	Genera Tolera ±	inces:	NPRDS / PROJECT <b>859</b>	
ORIENTATION : N CONTACT TYPE : SOCKET(500 Matings)	SOURIAU	WWW.SOUR	IAU.COM	This document is the pro SOURIAU it must not be reprodu communicated without p	iced or
CONTACT LAYOUT : 11-05	FORMAT A3		RIAU DRG N° )11S05BN-C		SHEET 1/2
F E	D	C	B	A	,

r	τ	۵	н П	m	D	0	
		Contact Layout				P;	anel Cutou
4	-x	$\stackrel{E \bigoplus \cdots \bigoplus^{A}}{\cdots} \cdots \xrightarrow{D \bigoplus \cdots} \cdots \longrightarrow $			Ā	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Conti positi ID A B C C D E Shell Arrangement Num size no. cont	Non         X-axis (mm)         Y-axis (mm)           + 0.65 (1.65)         +.056 (1.42)           + 1.13 (2.87)        065 (1.65)           + 0.00 (0.00)        130 (3.30)          113 (2.87)        065 (1.65)          065 (1.65)         +.056 (1.42)           ber of         Size         Service         Contactt         Supersedes           tacts         contacts         rating         location         Supersedes				ØA ØA	2 2 <u>7</u>
ى	11 -5 5	5 20 I All MS20050-5				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	oducts whi y either of
N						PN: 81	Country FR
					A 07-10-2	2016 First Release	
					ISS DAT Designed By:	E Latest modification - by Date:	
					TITLE		less Ste
<b>_</b>					SCALE NA	-{	ral linear erances: ±
					SOURIA	WWW.SOUF	RIAU.C
				_	FORMAT A3		JRIAU 011S0
	Н	G	F	E	D	С	

