


NOTES:

1. MATERIALS:
HOOD: PBT GF UL94 V-0 BLACK
FRONTSEALING: SILICONE VMQ BLUE
SCREW: STAINLESS STEEL
O-RING: NBR BLACK
2. TEMPERATURE RANGE: -30°C TO +90°C
3. RECOMMENDED TORQUE FOR SCREW:
35Ncm (3.1 in.LB)
MAX. TORQUE: 68Ncm (6 in.LB)
4. SINGLE PACKED

* COMPLETELY TIGHTENED

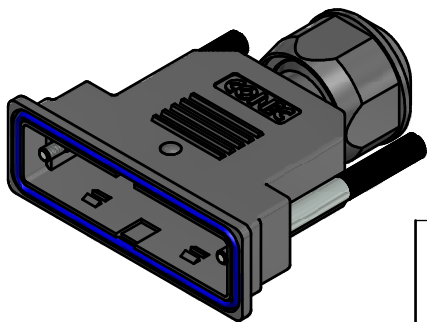

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance		±0,3 unless otherw. specified		dim. in mm	scale:	1,5:1 (1:1)					
						material:	SEE NOTES					
	date	name		title:		WATER RESISTANT D-SUB HOOD 25 POS. JACKSREW 4-40UNC STAINLESS STEEL						
	drawn	06.02.2014	Heinrich		dwg no:					15K1A1433	DIN-A3	
	appd.	06.02.2014	Huether		part no:						sh: 1	
	norm			d-old	15K1A1152							
	a	Origin										
	rev.	description	date	name			15-004680					