


NOTES:

- 1) LABEL REQUIREMENT:
LABELS ARE M23053/5 ,WHITE. ACCEPTABLE SUBSTITUTION IS DAT-38-292 OR TRANSVINYL (DAT-63-292-2.5).
- 2) ASSEMBLY REQUIREMENT:
 - ASSEMBLY CAN BE BUILT AS SUB-ASSEMBLY PN 17053010D2-SUB USING ITEM 2, 3, 4, 5, 6.
 - DEPICTION OF ITEM 1, & 3 IS FOR REFERENCE ONLY.
- 3) TEST REQUIREMENT:
 - a. IL ≤ 1.0 dB @ 850 nm.
 - b. ENDFACE GEOMETRY:
 - PHYSICAL CONTACT PC: GR-326 BUT FIBER HEIGHT +/-50 nm
 - MT ENDFACE: EN-50377-15-1
 - c. ENDFACE VISUAL REQUIREMENT: PHYSICAL CONTACT PC: IEC-61300-3-35

REVISION HISTORY - ALL SHEETS ARE AT THE SAME REVISION			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2017/11/13	

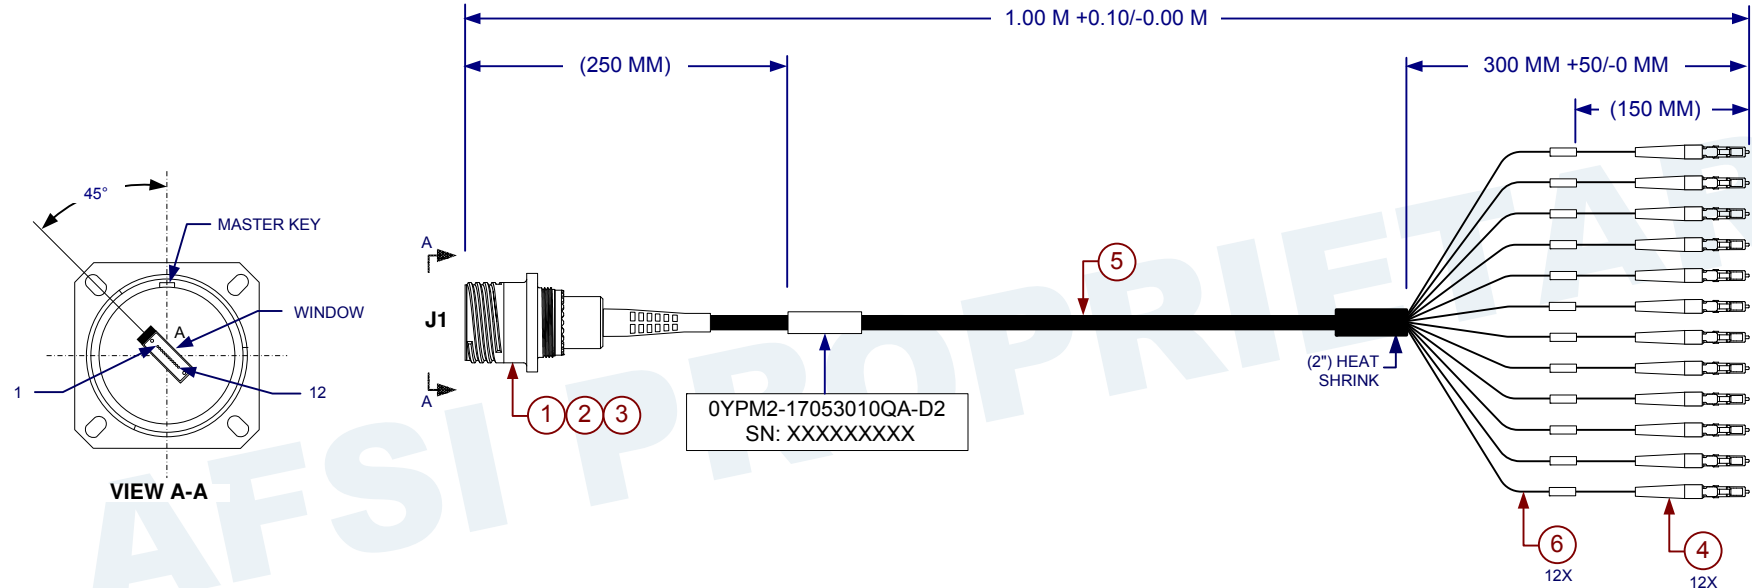

J1	PINOUT DIAGRAM	B LABEL INFORMATION
1		1
2		2
3		3
4		4
5		5
6		6
7		7
8		8
9		9
10		10
11		11
12		12

7	AFSI-PRE T BOX	BOX, SMALL FIBER CABLE 10X10X2 W/AFSI GRAPHICS	1
6	BSFT0600	FURCATION TUBE, 2MM ID600UM, BLACK	15.5 FEET
5	NFO1253M3-12	12 CHANNEL LITE FLIGHT	3.78 FEET
4	931-251-251	SIMPLEX LC CONNECTOR, MM, 2.0MM WHITE SHORT BOOT	12
3	CF-198137-000	FEMALE MT MOUNTING KIT	1
2	9734	KIT FERRULE 12F MM MT ELITE	1
1	CF-594011-01S	MT38999 WALL MOUNT RECEPTACLE, SHELL 11, SOCKET	1
ITEM NO.	PART NO.	DESCRIPTION	QTY/ LENGTH

MATERIAL:		DfTR/Designer: C. Hoang 2017/10/20			
		Check By: B. Waite 2017/10/24			
		Manufacturing: B. Waite 2017/10/24			
		Market Manager/PLM: Q. Abraham 2017/10/25			
		Configuration Management: L. Brown 2017/11/13	TITLE: 12 CHANNEL MT38999 RECEPTACLE TO LC ASSEMBLY, MM		
DRILLED HOLE DIAMETER TOLERANCE Ø.000 TO Ø.125 $\pm_{.001}^{.004}$ Ø.251 TO Ø.500 $\pm_{.001}^{.006}$ Ø.126 TO Ø.250 $\pm_{.001}^{.005}$ Ø.501 TO Ø.750 $\pm_{.001}^{.008}$		DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL ON ANGLES ±3° 1 PL ±.1 2 PL ±.02 3 PL ±.010 INTERPRET DIM AND TOL PER ASME 14.5M-1994			
NEXT ASSY	USED ON	SIZE A	CAGE CODE 0YPM2	DWG NO 17053010QA-D2	REV -
APPLICATION		SCALE: NONE	SHEET 1 OF 1		