

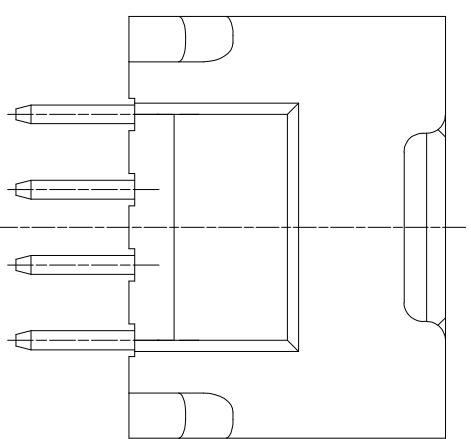
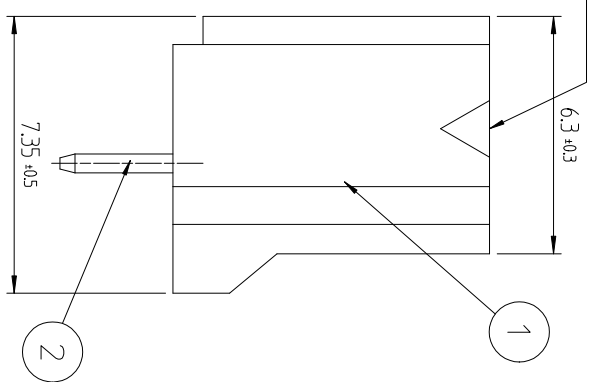
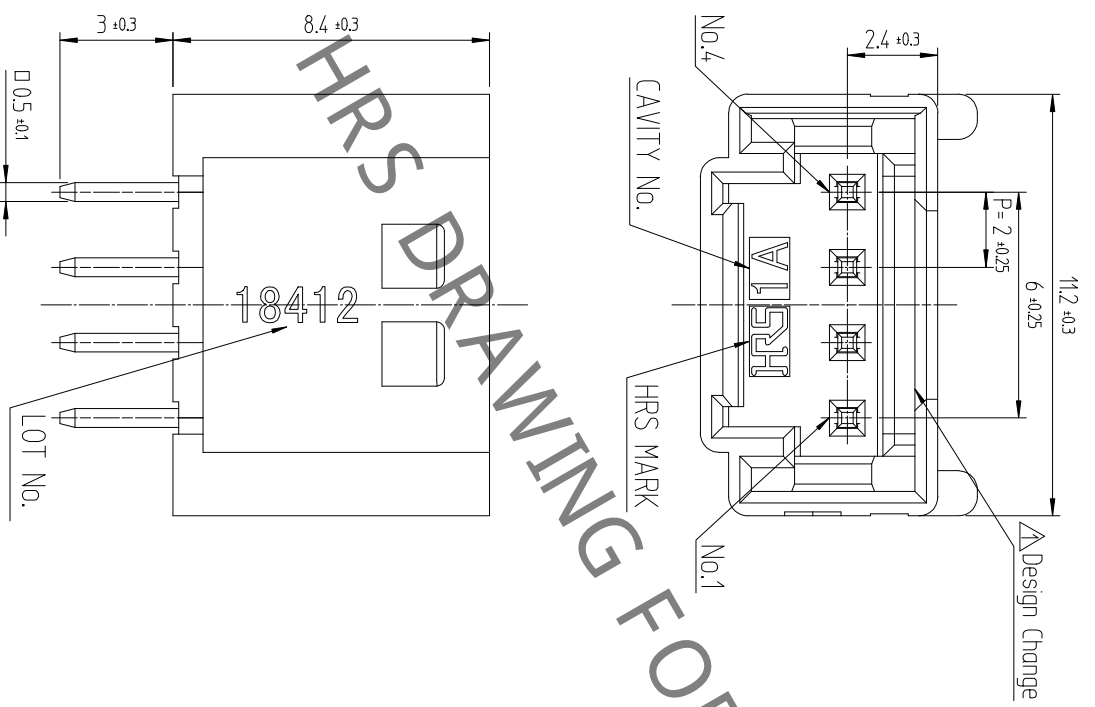



△數	訂正事項	檢圖	年月日	△數	訂正事項	檢圖	年月日
COUNT	DESCRIPTION OF REVISIONS	B Y	CHKD	COUNT	DESCRIPTION OF REVISIONS	B Y	CHKD
1	RE-6-1150	K.I.Y	18. 07. 04	△			
2	RE-6-1579	K.I.Y	20. 01. 23	△			

RECOMMENDED LAND PATTERN (FREE)
 (PCB THICKNESS t=1.6mm)

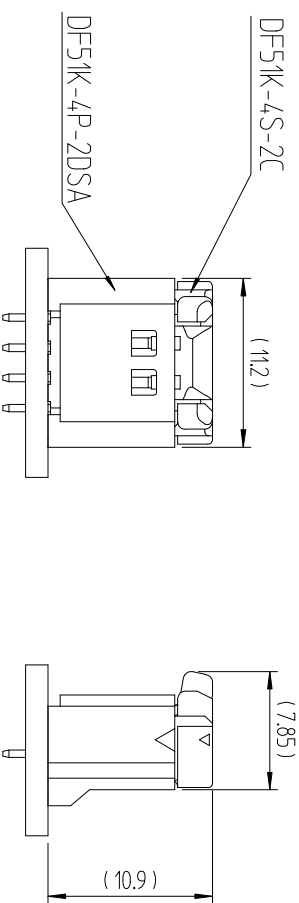

ENGAGEMENT FIGURE (2:1)

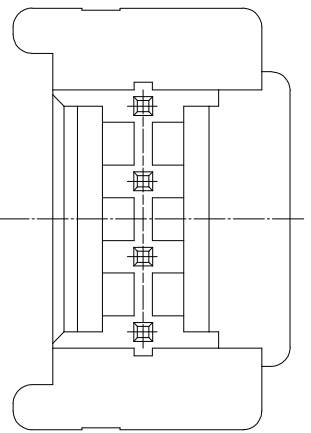

NOTE 1. 1PACK CONTAINS 100PCS.

2. () DIMENSIONS ARE ONLY REFERENCE.

△ 3. UL(File No. E132750) AUTHORIZATION ARTICLE.

C-UL(File No. E132750) AUTHORIZATION ARTICLE.



NO. 1	△ PA66	UL94V-0, BLACK	NO. 2	BRASS	GOLD PLATING 0.1μm MIN, OVER NICKEL 0.5μm MIN
MATERIAL		FINISHREMARKS	FINISHREMARKS		
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED
		CHOI JS (17.12.22)	CHOI JS (17.12.22)	LIM SM (17.12.22)	KANG T.S (17.12.22)
DRAWING NO.		PART NO.		RELEASED	
EDC3-632454		DF51K-4P-2DSA (805)		ENG DEPT (20.02.12)	
SCALE 5:1		CODE NO			
UNITS mm		CL 6652-0003-7-805			