



Electrical specifications

Center Frequency: 1843 MHz
Bandwidth: 75 MHz min
VSWR: 1.7 : 1 max
Insertion Loss (F0): 3.0 dB max
Passband Ripple: 2.0 dB max
Input / Output Impedance: 50 Ohms
Rejection: 40 dB min at 1630.2~1705.2MHz
Rejection 2: 18dB min 1710~1785MHz
Rejection 3: 38 dB min at 1994.6~2069.6MHz
Rejection 4: 50 dB min at 2184.2~2259.2MHz
Rejection 5: 50 dB min at 2359~2434MHz
Power Handling: 3 W
Group Delay Variation: 10 nsec max

Mechanical


Mounting Method: SMT
Dimensions: 26 x 17 x 7.5 mm

Environmental

Operating Temperature: -20 to 70 deg. C
Storage Temperature: -55 to +85 deg. C

This product is RoHs compliant.

Outline Drawing:

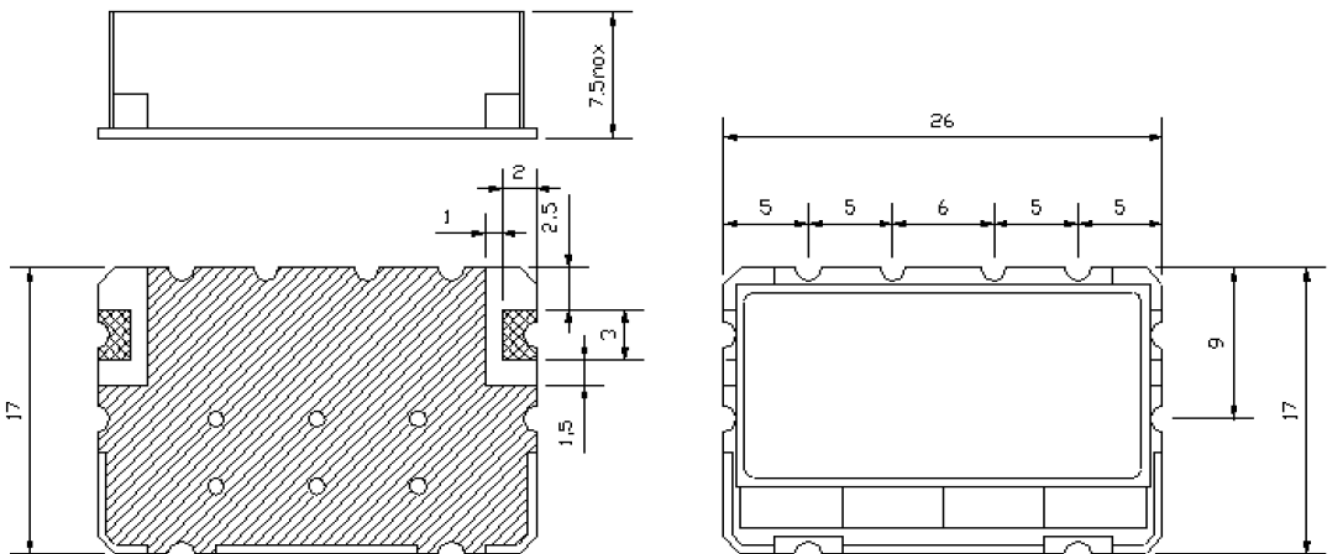

Unit:mm
Tolerance:±0.3