

2 W

DC- 18 GHz


SMA

COAXIAL ATTENUATOR

issue  
04.aug.93

Page  
1 / 1

**DRAWING**

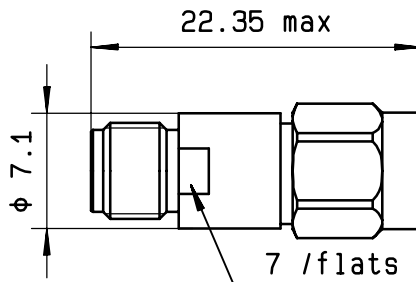

General tolerances: +/- 0.5 mm

**R F CHARACTERISTICS**

FREQUENCY RANGE : DC - 18 GHz  
 IMPEDANCE : 50 Ohms  
 ATTENUATION - NOMINAL : 10 dB

FREQUENCY	DC- 2 GHz	2 - 4 GHz	4 - 8 GHz	8 -12.4GHz	12.4- 18 GHz
V.S.W.R	<= 1.10	<= 1.15	<= 1.20	<= 1.25	<= 1.35
DEVIATION (dB)	+0.5 /- 0.5	+0.5 /- 0.5	+0.5 /- 0.5	+0.5 /- 0.5	+0.5 /- 0.5

TEMPERATURE SENSITIVITY :  $4 \times 10^{-4} \frac{dB}{dB \times ^\circ C}$


PEAK POWER at 25°C (1µs,1%.) : 100 W  
 AVERAGE POWER at 25°C : 2 W

**MECHANICAL CHARACTERISTICS**

CONNECTORS : SMA male/female per MIL-C 39012  
 WEIGHT : < 5 g

**ENVIRONMENTAL CHARACTERISTICS**

OPERATING TEMPERATURE RANGE (°C) : -55 , +125  
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

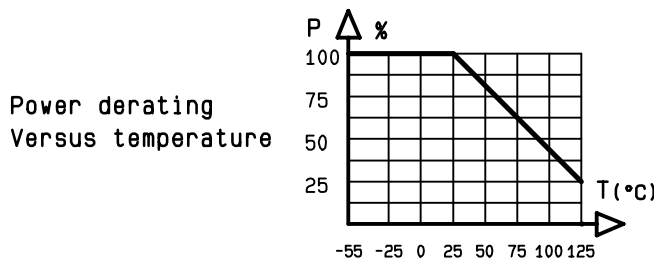

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

4112-9211

QUALITY Dpt app. _____			
CREATION			
PEN : CAT	04.aug.93	New format	VE
EP : -----	25.apr.89	New format	KL
Nom : KL			
Date:14.dec.87	ISSUE	REVISIONS	NAME

**RADIAL**®

101. Philibert Hoffmann | Phone:33.1.49353535  
 - Z.I Ouest - | Fax :33.1.48546363  
 93116 ROSNY/BOIS Cedex-FRANCE | Twx RADIA 235220F