
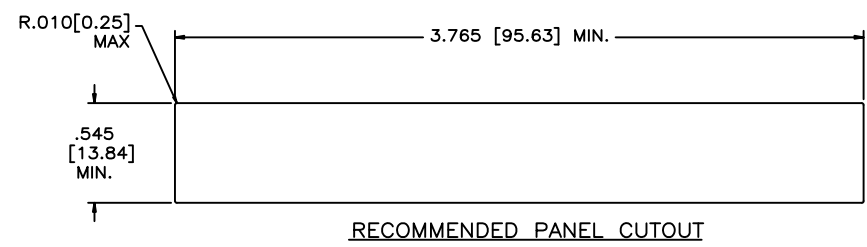
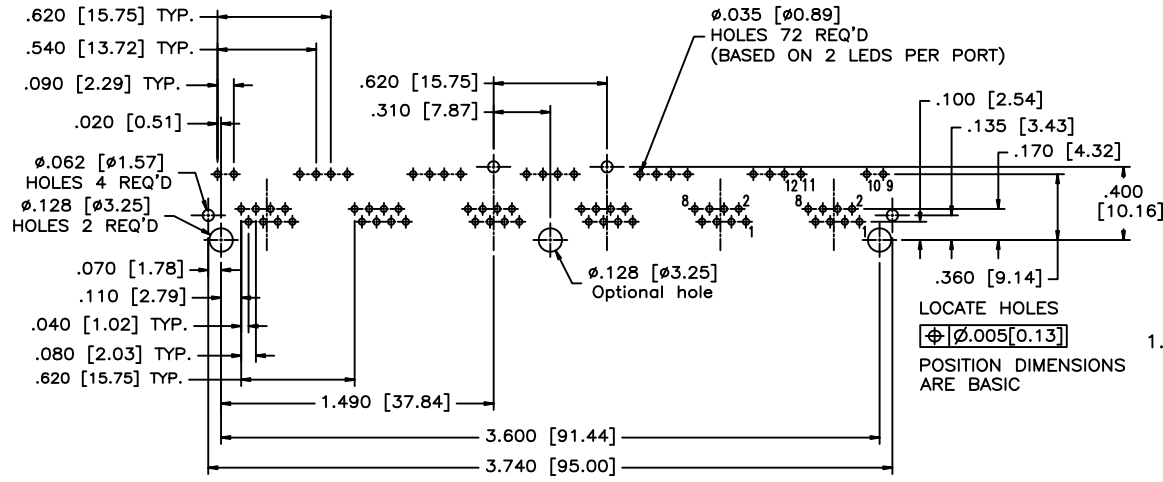

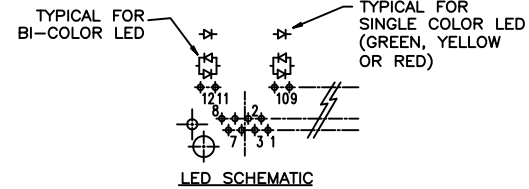
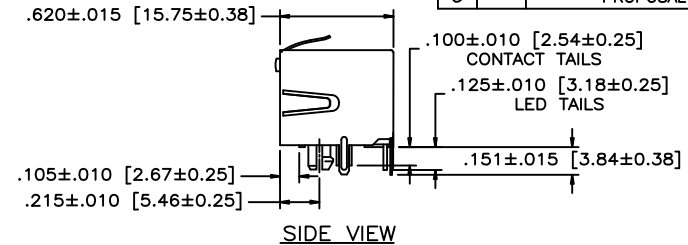


REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
B		PROPOSAL	05/11/18	L.CHAN
C		PROPOSAL	05/11/18	L.CHAN

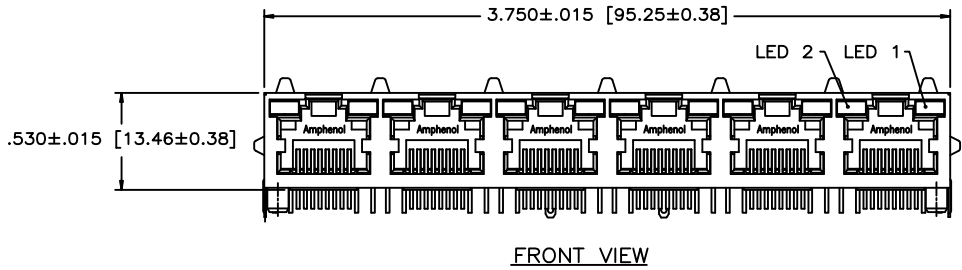

PART NUMBER: RJHSE-X38X-06

- GOLD PLATING
- E = RJ45 FLAT CONTACT 6 μ INCH
 - G = RJ45 FLAT CONTACT 15 μ INCH
 - J = RJ45 FLAT CONTACT 30 μ INCH
 - 5 = RJ45 FLAT CONTACT 50 μ INCH
- REFER TO LED OPTIONS DRAWING FOR ORDERING CODES

- MATERIALS:**
 PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0, COLOUR: BLACK
 CONTACTS: PHOSPHOR BRONZE
 PLATING: GOLD ON MATING SURFACES (SEE PART NO. FOR THICKNESS).
 50 μ [1.27 MICRONS]
 MIN. NICKEL UNDERPLATE
 100 μ [2.54 MICRONS]
 MIN. MATTE TIN ON CONTACT TAILS.
 SHIELD: COPPER ALLOY
 PLATING: NICKEL
- MECHANICAL:**
 MATING FORCE: 5.0 LBS MAX.
 MATING CYCLES: 200
- ELECTRICAL:**
 CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM
 INSULATION RESISTANCE: 500 MEGOHMS MINIMUM
 CURRENT RATING: 1.5 AMPS
 VOLTAGE RATING: 125 VOLTS AC
- ENVIRONMENTAL:**
 STORAGE TEMPERATURE: -20°C to 85°C
 STORAGE LIFE: 1 YEAR
 PACKAGING METHOD: TRAY PACKAGING
- UL FILE NUMBER:** E135615

DRAWN PAULW	DATE 05/11/18	Amphenol Canada Corp.		
DESIGNED				
CHECKED CHIGOW	DATE 05/11/18	TITLE 6 PORT HIGH SPEED MODULAR JACK, 8 POSITIONS, 8 CONTACTS, WITH GOLD PLATING OPTION, WITH LEDS OPTION, WITH SHIELD - RoHS COMPLIANT		
I. E. APPRD.				
Q. A. APPRD.		DWG DRAWING NO. P-RJHSE-X38X-06		
DWG. APPRD.				
ENG. REL. NO.		DWG	DRAWING NO.	REV. C
REF.				
DIMENSIONS ARE IN INCHES (mm)	CODE ID. NO. 03554	SCALE	WT.	SURF.
SHEET 1 OF 1				

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.