


REV. 0  
DCO 17223

COIL: @ 25°C	
RESISTANCE	2500 OHMS ± 10%
NOMINAL VOLTAGE	11.2 mADC
MUST OPERATE	5.6 mADC
MUST RELEASE	0.6 mADC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's - 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX.  
RELEASE 3 MS MAX.  
CONTACT BOUNCE 3 MS MAX.

CUSTOMER DATA SHEET

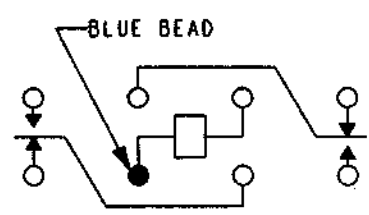

TERMINAL VIEW

CONTACT RATING:	5A 30 VDC
	3A 115 VAC 400 Hz RESISTIVE,
	100,000 OPERATIONS

DR. B.D. 8/24/01 CK. TLG 8-24-01



CUST. HI-G  
CUST. NO. 2BCN-1E-128 REV.

"SF" RELAY

SF5A5105J02