



MATING PART  
3030-XX-0102-00

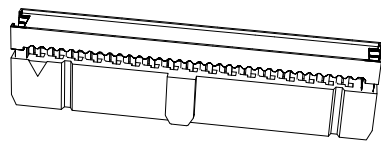

MATING PART  
3030-XX-0101-00

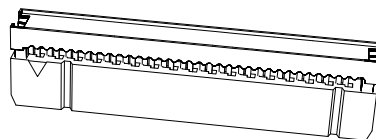

Specifications  
 Current Rating:3.0A AC/DC  
 Voltage Rating:250V AC/DC  
 Contact Resistance:20m ohm. Max  
 Insulation Resistance:1000M ohm. Min  
 Withstanding Voltage:600V AC For one minute  
 Operating Temperature Range : -40°C to +105°C

Material:  
 Plastic:PBT (UL94V-0)  
 Standard Color:Black  
 Contact:Copper Alloy  
 Plating:Gold Plated

Notes:  
 60P、64P With Three Key  
 All Other Pin With One Key

Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
10	32.20	10.16	30	57.60	35.56
14	37.28	15.24	34	62.68	40.64
16	39.82	17.78	40	70.30	48.26
20	44.90	22.86	50	83.00	60.96
24	49.98	27.94	60	95.70	73.66
26	52.52	30.48	64	100.78	78.74

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	<h1 style="color: red; text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>	
				CHECKED:			
					SCALE:1:1	2.54mm Shrouded Header With Ejector R/A Type	SIZE
	05-FEB-2020			APPROVAL:	SHEET: 1 / 1	PART NO:	A4
REV	DATE	FILE	BY		PROJECTION:	3010-XX-002-12-00	