


## HC-D 7-AMLD-24/GR

Order No.: 1676970

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1676970>

HEAVYCON panel mounting base D7, with single locking latch, height 24 mm, straight, aluminum, with aluminum protective cover, for female inserts

Commercial data	
GTIN (EAN)	 4 017918 129590
sales group	D011
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 509 (PC-2009)

**Product notes**

WEEE/RoHS-compliant since:  
03/01/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>General data</b>	
Note	For contact inserts HC-D7, D8, A3, A4, B5, HS2-D7
Design	D7
Height	24 mm
Width	38 mm

Length	28 mm
Housing type	Panel mounting base, straight
Locking type	With single locking latch
Protective cover	Yes
Degree of protection	IP54 / IP65 with sealing screw
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Zinc die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Material lock	Steel, galvanized
Single locking latch material	Zinc-plated steel and passivated
Material, protective cover	Zinc
Length of the assembly cutout	21.5 mm
Width of the assembly cutout	21.5 mm

#### Certificates / Approvals



Certification GOST

#### Accessories

Item	Designation	Description
------	-------------	-------------


#### Assembly

1686229	HC-D 7-DS-IP65	Sealing screw, for IP65 protection
---------	----------------	------------------------------------

## Diagrams/Drawings

### Dimensioned drawing

---

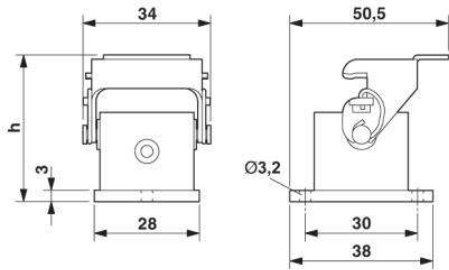

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;