

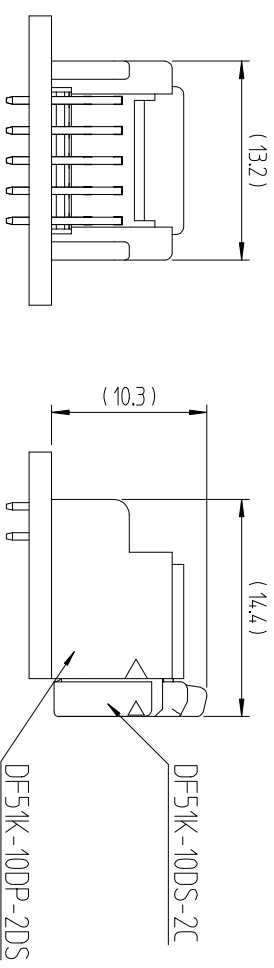
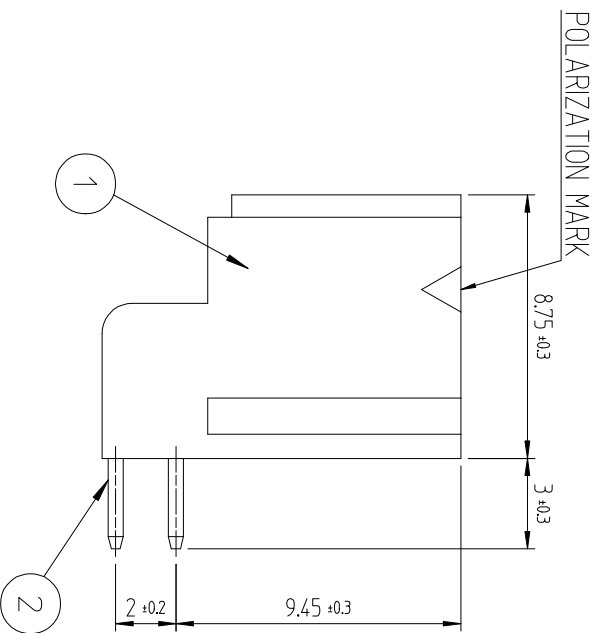
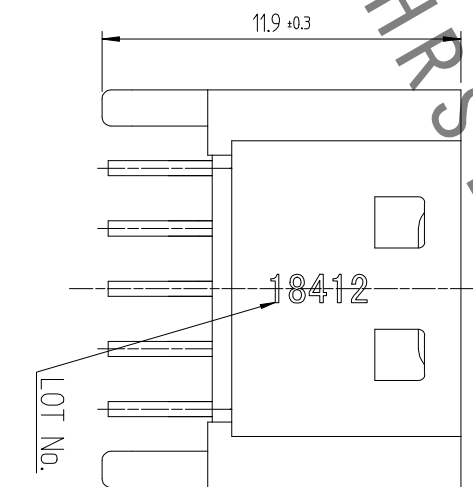
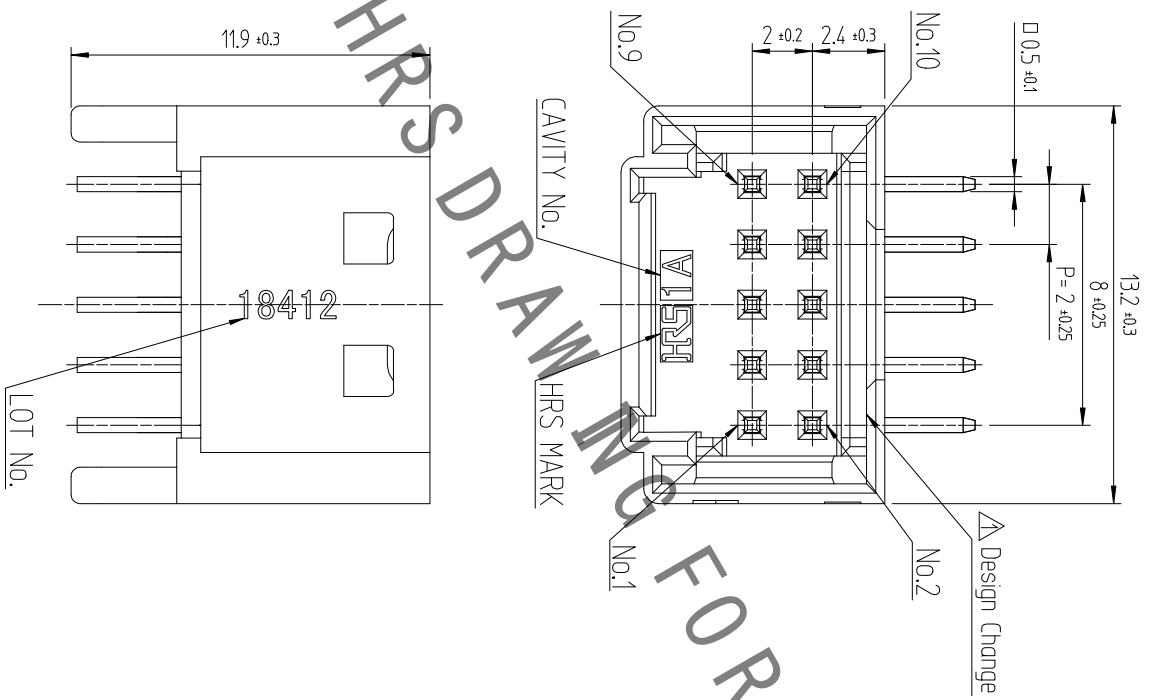


△數	訂正事項	檢圖	年月日	△數	訂正事項	檢圖	年月日
COUNT	DESCRIPTION OF REVISIONS	BY	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	DATE
1	RE-6-1150	K.I.Y	18. 07. 04				
2	RE-6-1579	K.I.Y	20. 01. 23				

RECOMMENDED LAND PATTERN (FREE)  
(PCB THICKNESS t=1.6mm)

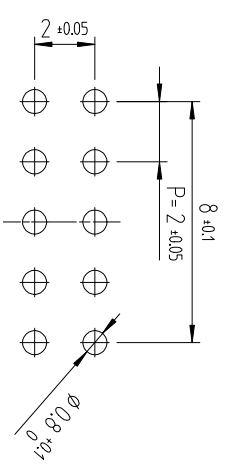

ENGAGEMENT FIGURE (2:1)

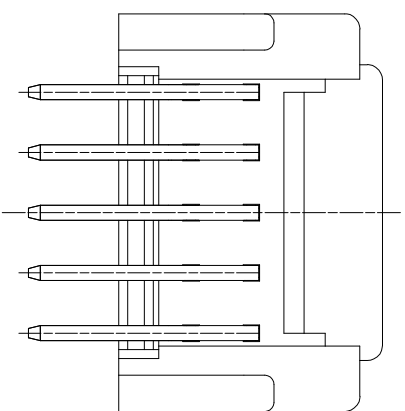

NOTE 1. 1PACK CONTAINS 230PCS.

2. ( ) DIMENSIONS ARE ONLY REFERENCE.

△ 3. UL(IE File No. E132750) AUTHORIZATION ARTICLE.

C-UL(IE File No. E132750) AUTHORIZATION ARTICLE.



1	PBT	UL94V-0, BLACK	2	BRASS	GOLD PLATING 0.1μm MIN, OVER NICKEL 0.5μm MIN
NO.	MATERIAL	FINISH;REMARKS	NO.	MATERIAL	FINISH;REMARKS
CODE NO. (OLD)		DRAWN			
		CHOI (18.03.02) J.S			
		DESIGNED			
		CHOI (18.03.02) J.S			
		CHECKED			
		LIM (18.03.02) S.M			
		APPROVED			
		KANG (18.03.02) T.S			
		RELEASED			
		ENG (20.02.12) DEPT			
DRAWING NO.		PART NO.			
EDC3-632479		DF51K-10DP-2DS (805)			
SCALE		CODE NO			
UNITS		CL 6652-0055-0-805			
MM					

1/1