



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

DMMT5551

Features

- Surface Mount SOT-363 Package
- 200mWatts of Power Dissipation
- Ideal for Medium Power Amplification and Switching
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Marking:K4R

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Rating	Rating	Unit
V _{CEO}	Collector-Emitter Voltage	160	V
V _{CBO}	Collector-Base Voltage	180	V
V _{EBO}	Emitter-Base Voltage	6.0	V
I _C	Collector Current-Continuous	0.2	A
P _D	Power Dissipation	0.2	W
T _J	Operating Junction Temperature	-55 to +150	°C
T _{STG}	Storage Temperature	-55 to +150	°C

OFF CHARACTERISTICS

V _{(BR)CEO}	Collector-Emitter Breakdown Voltage (I _C =-1.0mA, I _B =0)	160	---	Vdc
V _{(BR)CBO}	Collector-Base Breakdown Voltage (I _C =100µA, I _E =0)	180		Vdc
V _{(BR)EBO}	Emitter-Base Breakdown Voltage (I _E =10µAdc, I _C =0)	6.0		Vdc
I _{EBO}	Emitter Cutoff Current (V _{EB} =4Vdc, I _C =0)		50	nAdc
I _{CBO}	Collect Cutoff Current (V _{CB} =120Vdc, I _E =0)		50	nAdc

ON CHARACTERISTICS


h _{FE}	DC Current Gain* (I _C =1mA, V _{CE} =5.0Vdc) (I _C =10mA, V _{CE} =5.0Vdc)	80	250	
V _{CE(sat)}	Collector-Emitter Saturation Voltage (I _C =10mA, I _B =1.0mA)		0.15	Vdc
V _{BE(sat)}	Base-Emitter Saturation Voltage (I _C =10mA, I _B =1.0mA)		1.0	Vdc

SMALL-SIGNAL CHARACTERISTICS

f _r	Current Gain-Bandwidth Product (I _C =10mA, V _{CE} =10Vdc, f=100MHz)	100	300	MHz
C _{obo}	Output Capacitance (V _{CB} =10Vdc, I _E =0, f=1.0MHz)		6.0	pF
Noise figure	R _g =1kohm V _{CE} =5Vdc, I _C =200µA, f=1KHz, R=1KOHM		8.0	NF

Plastic-Encapsulate Transistors

SOT-363

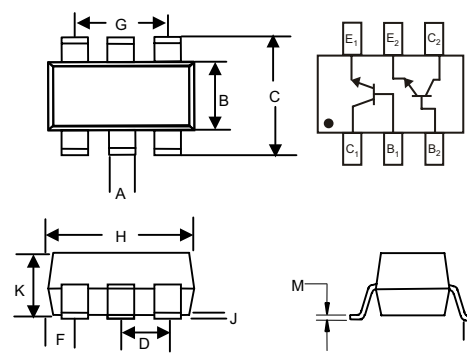

DIM	DIMENSIONS				NOTE
	INCHES		MM		
A	.004	.012	0.10	0.30	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026		0.65Nominal		
F	.012	.016	0.30	0.40	
H	.071	.087	1.80	2.20	
J	---	.004	---	0.10	
K	.035	.039	0.90	1.00	
L	.010	.016	0.25	0.40	
M	.004	.016	0.10	0.25	



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.